

## Lenovo ThinkServer TS140

### Product Guide (withdrawn product)

The Lenovo ThinkServer TS140 is the perfect first tower server for small and medium businesses, remote or branch offices, and retail environments. It features the Intel Xeon processor E3-1200 v3 product family with four cores and support for up to 32 GB of 1600 MHz DDR3 memory. Also, it offers an integrated NIC and additional PCIe expansion slots for peripheral port scalability. Up to 24 TB of internal enterprise-class storage supports storage-intensive workloads, such as office applications, web, e-mail and file and print serving, and provides growth capacity.

The following figure shows the Lenovo ThinkServer TS140.



Figure 1. Lenovo ThinkServer TS140

### Did you know?

The TS140 offers enterprise-class reliability features such as error correcting code (ECC), the onboard RAID controller, and enterprise-class hard drives and network adapters at an affordable price.

Intel Active Management Technology (AMT) built into the TS140 offers easy-to-use, industry-standard management tools for remote monitoring, updates, and repairs.

The TS140 runs a wide range of server operating systems, and it also supports client OS capability.

The TS140 is among the quietest tower servers in the industry that fits under or beside an office desk.

## Key features

The ThinkServer TS140 server is an office-friendly tower server that has been optimized to provide enterprise-class features to small-to-medium-sized businesses, retail stores, and distributed enterprises.

### Scalability and performance

The TS140 offers numerous features to boost performance, improve scalability, and reduce costs:

- The Intel Xeon processor E3-1200 v3 improves productivity by offering affordable single-socket system performance with 4-core processors with up to 3.7 GHz core speeds and up to 8 MB cache.
- Intelligent and adaptive system performance with Intel Turbo Boost Technology 2.0 allows processor cores to run at maximum speeds during peak workloads by temporarily going beyond processor thermal design power (TDP).
- Intel Hyper-Threading Technology boosts performance for multithreaded applications by enabling simultaneous multithreading within each processor core, up to two threads per core.
- Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better use the hardware for virtualization workloads.
- Up to four 1600 MHz DDR3 ECC or UDIMMs provide speed and capacity of up to 32 GB.
- The server offers PCI Express 3.0 I/O expansion capabilities that increase the theoretical maximum bandwidth by almost 100% (8 GTps per link using 128b/130b encoding) compared to the PCI Express 2.0 (5 GTps per link using 8b/10b encoding).
- With Intel Integrated I/O Technology, the PCI Express 3.0 controller is integrated into the Intel Xeon processor E3-1200 v3 product family. Such integration reduces I/O latency and increases overall system performance.
- Up to four 3.5-inch non-hot-swap (NHS) drive bays provide flexible internal storage capacity.
- The use of solid-state drives (SSDs) instead of, or along with, traditional spinning drives (hard disk drives or HDDs) can significantly improve I/O performance.

### Availability and serviceability

The TS140 provides many features to simplify serviceability and increase system uptime:

- The TS140 supports UDIMM memory with ECC protection which provides error correction not available in PC-class "servers" that use parity memory. Avoiding system crashes (and data loss) due to soft memory errors means greater system uptime.
- Tool-less cover removal provides easy access to upgrades and serviceable parts, such as memory and adapter cards.
- An affordable onboard SATA RAID controller offers data protection and greater system uptime.
- The use of SSDs can provide better reliability than the use of traditional HDDs, for greater uptime.
- Built-in Active Management Technology continuously monitors system parameters, sends alerts, and enables administrators to perform remote recovery actions to minimize downtime.
- The ThinkServer EasyUpdate firmware update tool enables you to keep your server firmware up-to-date and helps you avoid unnecessary server outages.
- The ThinkServer Diagnostics software speeds up troubleshooting tasks to reduce service time.
- One-year or three-year customer-replaceable unit (CRU) and onsite limited warranty with next business day response. Optional service upgrades are available.

## **Manageability and security**

Powerful systems management features simplify local and remote management of the TS140:

- Active Management Technology monitors server availability and enables administrators to perform remote management.
- An integrated industry-standard Unified Extensible Firmware Interface (UEFI) enables improved setup, configuration, and updates, and simplifies error handling.
- The ThinkServer EasyStartup tool simplifies the process of configuring RAID and installing supported Microsoft Windows and Linux operating systems, VMware hypervisors, and device drivers on a ThinkServer system.
- The Trusted Platform Module (TPM) (select models) enables advanced cryptographic functionality, such as digital signatures and remote attestation.
- Administrator's and power-on passwords help protect from unauthorized access to the server.
- Optional server locks such as a padlock or cable lock help prevent unauthorized access to the internal components of the server, and the intrusion switch (select models) informs about the removed or improperly installed server cover.

## **Energy efficiency**

The TS140 offers the following energy-efficiency features to save energy, reduce operational costs, increase energy availability, and contribute to a green environment:

- Energy-efficient planar components help lower operational costs.
- Intelligent Cooling Engine (ICE) actively monitors component temperatures in real-time and optimally adjusts the speeds of the fans to keep the system cooler and quieter.
- The ThinkServer Power Planner tool provides information about the power consumption and electric current calculation for the different configurations of servers and other devices, which helps plan deployment of servers and devices in an efficient way.
- Intel Intelligent Power Capability powers individual processor elements on and off as needed, to reduce power draw.

## Components and connectors

The following figure shows the front of the TS140.

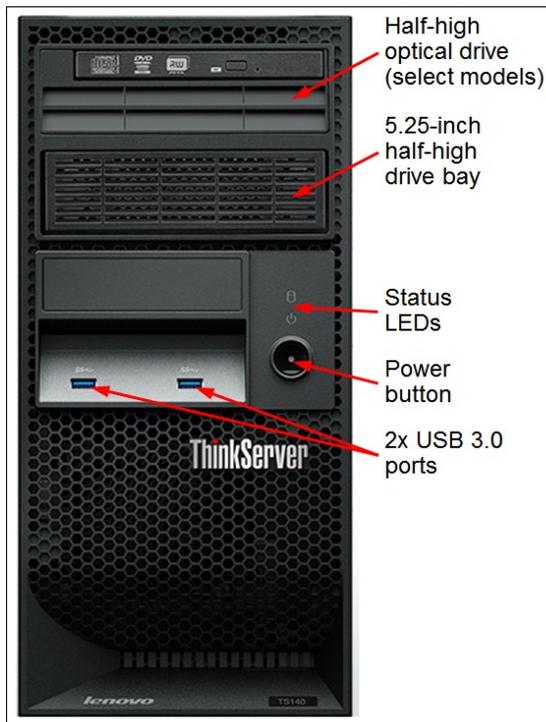


Figure 2. TS140 front view

The following figure shows the rear of the TS140.

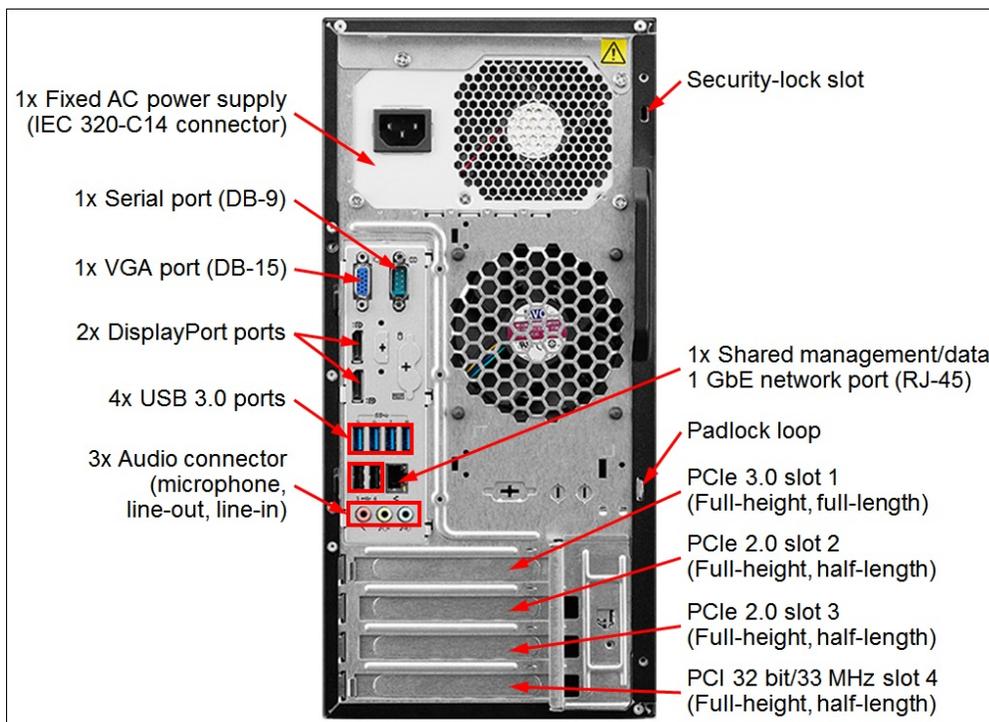


Figure 3. TS140 rear view

The following figure shows the internal components of the TS140.

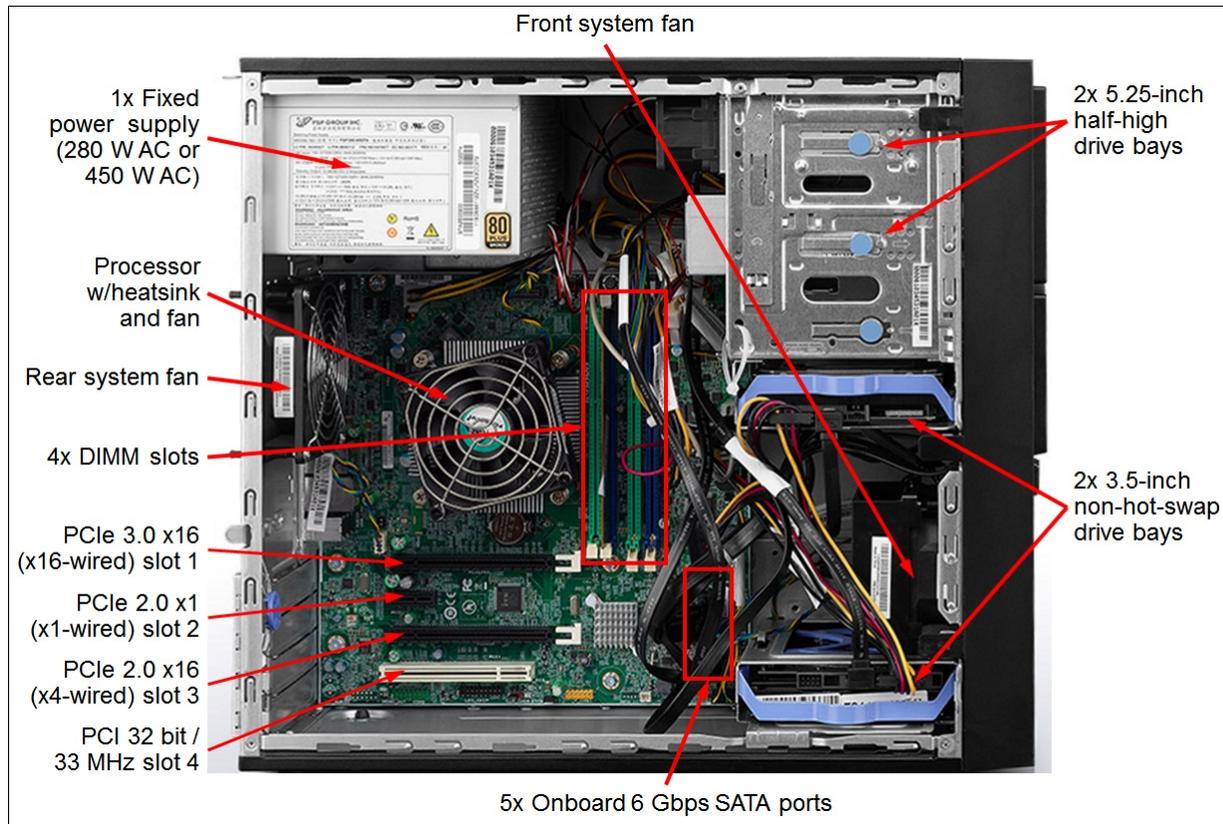


Figure 4. TS140 internal view

## System specifications

The following table lists the system specifications.

Table 1. System specifications

Components	Specification
Form factor	Tower or 4U rack-mount (on a shelf)
Processor	<ul style="list-style-type: none"> <li>One Intel Xeon processor E3-1200 v3 product family CPU with four cores up to 3.7 GHz, 8 MB cache, and up to 1600 MHz memory speed; or</li> <li>One Intel Core-i3 Processor 4100/4300 product families CPU with two cores up to 3.7 GHz, up to 4 MB cache, and 1600 MHz memory speed; or</li> <li>One Intel Pentium Processor G3200/G3400 product families CPU with two cores up to 3.4 GHz, 3 MB cache, and up to 1600 MHz memory speed; or</li> <li>One Intel Celeron Processor G1800 product family CPU with two cores up to 2.9 GHz, 2 MB cache, and up to 1333 MHz memory speed.</li> </ul>
Chipset	Intel C226.
Memory	Four DIMM sockets. Support for ECC UDIMMs. DIMM speeds up to 1600 MHz.
Memory maximums	Up to 32 GB with four 8 GB UDIMMs.
Memory protection	Error-correcting code (ECC) memory.
Drive bays	4x 3.5-inch non-hot-swap SATA drive bays.

Components	Specification
Drive types	<p>2.5-inch drives (in a 3.5-inch drive tray):</p> <ul style="list-style-type: none"> <li>Nearline (NL) SATA HDDs</li> <li>SATA SSDs</li> </ul> <p>3.5-inch drives:</p> <ul style="list-style-type: none"> <li>NL SATA HDDs</li> </ul> <p>Intermix of SATA HDDs and SSDs is supported within a system, but not within a RAID array.</p>
Maximum internal storage	<ul style="list-style-type: none"> <li>Up to 24 TB with 6 TB 3.5-inch NL SATA HDDs</li> <li>Up to 4 TB with 1 TB 2.5-inch NL SATA HDDs</li> <li>Up to 2.4 TB with 600 GB 2.5-inch SATA SSDs</li> </ul>
RAID support	<ul style="list-style-type: none"> <li>Non-RAID with the integrated SATA controller.</li> <li>RAID 0, 1, 10, and 5 with ThinkServer RAID 100.</li> </ul>
Optical drive bays	One. Support for DVD-ROM or DVD-RW.
Backup drive bays	One. Support for RDX backup drive.
Network interfaces	One integrated Gigabit Ethernet (10/100/1000 Mbps) RJ-45 port (Intel I217LM): Ashared port for management and data.
I/O expansion slots	<ul style="list-style-type: none"> <li>Slot 1: PCIe 3.0 x16 (x16-wired); full-height, half-length</li> <li>Slot 2: PCIe 2.0 x1 (x1-wired); full-height, half-length</li> <li>Slot 3: PCIe 2.0 x16 (x4-wired); full-height, half-length</li> <li>Slot 4: PCI 32 bit / 33 MHz (5 V); full-height, half-length</li> </ul>
Ports	<ul style="list-style-type: none"> <li>Front: 2x USB 3.0 ports.</li> <li>Rear: 4x USB 3.0 ports, 2x USB 2.0 ports, 2x DisplayPort ports, 1x DB-15 VGA port, 1x DB-9 serial port, 1x RJ-45 GbE network port, 3x audio connectors (line-in, line-out, microphone).</li> </ul>
Cooling	Three fixed system fans with Intelligent Cooling Engine (ICE).
Power supply	One fixed 280 W AC (100 - 240 V) or 450 W AC (100 - 240 V) power supply.
Hot-swap parts	None.
Systems management	<p>UEFI, system LEDs, ThinkServer EasyStartup, ThinkServer EasyUpdate, ThinkServer Power Planner, and ThinkServer Diagnostics.</p> <ul style="list-style-type: none"> <li>E3-1200 v3: Intel Active Management Technology (AMT) 9.0</li> <li>Core i3, Pentium, and Celeron: Intel Standard Manageability (ISM)</li> </ul>
Security features	Power-on password, administrator's password, Intrusion Switch (select models), Trusted Platform Module (TPM) (select models), security lock slot, and padlock loop.
Video	<ul style="list-style-type: none"> <li>Intel HD Graphics integrated into a processor (select models).</li> <li>NVS 315 Graphic Adapter by NVIDIA (select models).</li> </ul> <p>Maximum resolution is 1920x1080 at 60 Hz with 32 bits per pixel (16M colors).</p>
Operating systems	Microsoft Windows 7, 8, and 8.1; Microsoft Windows Server 2008 R2, 2012, 2012 R2, and 2016; Red Hat Enterprise Linux (RHEL) Server 6 and 7; VMware vSphere (ESXi) 5.1 and 5.5.
Warranty	One-year or three-year (model dependent) customer-replaceable unit (CRU) and on-site limited warranty with 9x5 next business day (NBD).
Service and support	Optional service upgrades (country-specific) are available through Lenovo Services offerings: 8-hour or 4-hour response time, warranty extension up to 5 years, Priority Technical Support, and Keep Your Drive Multi-Drive.
Dimensions	Height: 375 mm (14.8 in.), width: 175 mm (6.9 in.), depth: 431 mm (17.0 in.)
Weight	Maximum: 13.0 kg (28.7 lb)

## Relationship models

TS140 relationship models are region-specific; that is, each region may define their own server models, and not all server models are available in every region.

For a list of the TS140 relationship models (Machine Types 70A0 and 70A1), refer to the TS140 PSREF webpage ([http://psref.lenovo.com/Product/ThinkServer\\_TS140](http://psref.lenovo.com/Product/ThinkServer_TS140)) or contact a Lenovo or Lenovo Business Partner representative in your region.

**Product availability:** Relationship models of the ThinkServer TS140 are withdrawn and no longer available for ordering.

**Note:** TS140 server models are available in North America (United States and Canada); Latin America (Argentina, Brazil, Chile); select Europe, Middle East, Africa (EMEA) regions; Asia Pacific (Australia, Japan, Korea, Taiwan); and China.

The TS140 server models are shipped with the following items:

- *Read Me First* printed publication
- Documentation DVD containing the *TS140 User's Guide*
- ThinkServer EasyStartup software DVD
- One line cord

## TopSeller models

TS140 TopSeller models are region-specific; that is, each region may define their own server models, and not all server models are available in every region.

For a list of the TS140 TopSeller models (Machine Types 70A4 and 70A5), refer to the TS140 PSREF webpage ([http://psref.lenovo.com/Product/ThinkServer\\_TS140](http://psref.lenovo.com/Product/ThinkServer_TS140)) or contact a Lenovo or Lenovo Business Partner representative in your region.

**Product availability:** TopSeller models of the ThinkServer TS140 are withdrawn and no longer available for ordering.

**Note:** TS140 server models are available in North America (United States and Canada); Latin America (Argentina, Brazil, Chile); select Europe, Middle East, Africa (EMEA) regions; Asia Pacific (Australia, Japan, Korea, Taiwan); and China.

The TS140 server models are shipped with the following items:

- *Read Me First* printed publication
- Documentation DVD containing the *TS140 User's Guide*
- ThinkServer EasyStartup software DVD
- One line cord

## Processors

The TS140 supports one processor. The following table lists the specifications of the processors that are available for the TS140 server.

Table 2. Processor specifications (Hyper-Threading [HT], Turbo Boost [TB], Virtualization Technology [VT])

Processor model	Core frequency (Base / TB Max)	Cores / threads	Cache	Max DDR3 frequency	TDP	HT	TB	VT-x	VT-d	IG#	Mgt*
<b>Intel Xeon processors</b>											
E3-1220 v3	3.1 / 3.5 GHz	4 / 4	8 MB	1600 MHz	80 W	No	Yes	Yes	Yes	No	AMT
E3-1225 v3	3.2 / 3.6 GHz	4 / 4	8 MB	1600 MHz	84 W	No	Yes	Yes	Yes	Yes	AMT

E3-1226 v3	3.3 / 3.7 GHz	4 / 4	8 MB	1600 MHz	84 W	No	Yes	Yes	Yes	Yes	AMT
E3-1230 v3	3.3 / 3.7 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1231 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1240 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1241 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1245 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1246 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1270 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1271 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1275 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1276 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1280 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	82 W	Yes	Yes	Yes	Yes	No	AMT
E3-1281 v3	3.7 / 4.1 GHz	4 / 8	8 MB	1600 MHz	82 W	Yes	Yes	Yes	Yes	No	AMT
E3-1285 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1286 v3	3.7 / 4.1 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1286L v3	3.2 / 4 GHz	4 / 8	8 MB	1600 MHz	65 W	Yes	Yes	Yes	Yes	Yes	AMT
<b>Intel Core processors</b>											
i3-4130	3.4 GHz	2 / 4	3 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4150	3.5 GHz	2 / 4	3 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4150T	3 GHz	2 / 4	3 MB	1600 MHz	35 W	Yes	No	Yes	No	Yes	ISM
i3-4170	3.7 GHz	2 / 4	3 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4330	3.5 GHz	2 / 4	4 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4340	3.6 GHz	2 / 4	4 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4350	3.6 GHz	2 / 4	4 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
i3-4360	3.7 GHz	2 / 4	4 MB	1600 MHz	54 W	Yes	No	Yes	No	Yes	ISM
<b>Intel Pentium processors</b>											
G3220	3 GHz	2 / 2	3 MB	1333 MHz	53 W	No	No	Yes	No	Yes	ISM
G3240	3.1 GHz	2 / 2	3 MB	1333 MHz	53 W	No	No	Yes	No	Yes	ISM
G3240T	2.7 GHz	2 / 2	3 MB	1333 MHz	35 W	No	No	Yes	No	Yes	ISM
G3260	3.3 GHz	2 / 2	3 MB	1333 MHz	53 W	No	No	Yes	No	Yes	ISM
G3420	3.2 GHz	2 / 2	3 MB	1600 MHz	53 W	No	No	Yes	No	Yes	ISM
G3430	3.3 GHz	2 / 2	3 MB	1600 MHz	53 W	No	No	Yes	No	Yes	ISM
G3440	3.3 GHz	2 / 2	3 MB	1600 MHz	53 W	No	No	Yes	No	Yes	ISM
G3440T	2.8 GHz	2 / 2	3 MB	1600 MHz	35 W	No	No	Yes	No	Yes	ISM
G3450	3.4 GHz	2 / 2	3 MB	1600 MHz	53 W	No	No	Yes	No	Yes	ISM
<b>Intel Celeron processors</b>											
G1840	2.8 GHz	2 / 2	2 MB	1333 MHz	53 W	No	No	Yes	No	Yes	ISM
G1840T	2.5 GHz	2 / 2	2 MB	1333 MHz	35 W	No	No	Yes	No	Yes	ISM
G1850	2.9 GHz	2 / 2	2 MB	1333 MHz	53 W	No	No	Yes	No	Yes	ISM

\* Mgt = Management

# IG = Intel Integrated HD Graphics

## Memory

Lenovo DDR3 memory is compatibility tested and tuned for optimal ThinkServer performance and throughput. From a service and support standpoint, Lenovo memory automatically assumes the system warranty, and Lenovo provides service and support worldwide.

The TS140 server has four DIMM slots, and it supports DDR3 UDIMMs with ECC memory protection. The processor has two memory channels and supports two DIMMs per channel.

The following rules apply when selecting the memory configuration:

- The TS140 server supports memory configurations with 1, 2, 3, or 4 UDIMMs.
- The TS140 server supports up to 1600 MHz memory speeds for one DIMM per channel and two DIMMs per channel configurations, provided that the processors support this memory speed (see the Processor options table in the Processors section for details).

The following table summarizes memory speeds and capacities that are supported by the TS140 server.

Table 3. TS140 maximum memory speeds and capacities

DIMMs per channel	UDIMM	
	Memory bus speed	Maximum capacity
1 DPC	1600 MHz	16 GB (2x 8 GB)
2 DPC	1600 MHz	32 GB (4x 8 GB)

The following table lists the memory options that are available for the TS140 server.

Table 4. Memory options

Description	Part number	Maximum supported
ThinkServer 4GB DDR3L-1600MHz (1Rx8) ECC UDIMM	0C19499	4
ThinkServer 8GB DDR3L-1600MHz (2Rx8) ECC UDIMM	0C19500	4

## Internal storage

The TS140 server supports the following internal storage configurations:

1. 4x 3.5-inch non-hot-swap drive bays + slim optical drive bay
2. 3x 3.5-inch non-hot-swap drive bays + half high optical drive bay
3. 3x 3.5-inch non-hot-swap drive bays + slim optical drive bay + backup drive bay
4. 2x 3.5-inch non-hot-swap drive bays + half high optical drive bay + backup drive bay

These configurations are shown in the following figure.

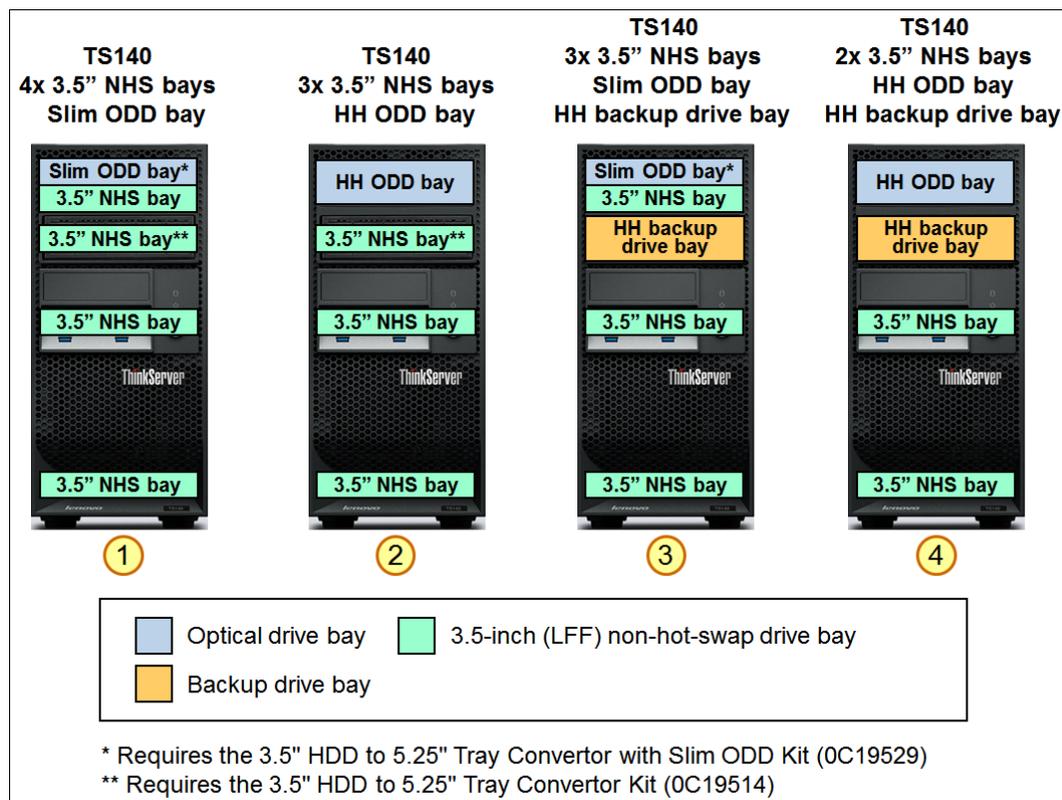


Figure 5. Internal storage configurations

The following table lists the internal storage expansion options that are available for the TS140 server.

Table 5. Internal storage expansion options

Description	Part number	Maximum supported
ThinkServer 3.5" HDD to 5.25" Tray Convertor Kit	OC19514	1
ThinkServer 3.5" HDD to 5.25" Tray Convertor with Slim ODD Kit	OC19529	1

### Configuration notes:

- The ThinkServer 3.5" HDD to 5.25" Tray Convertor Kit is required when a 3.5-inch drive is installed in the half-high bay 2 (HH backup drive bay).
- The ThinkServer 3.5" HDD to 5.25" Tray Convertor with Slim ODD Kit is required when a 3.5-inch drive is installed in the half-high bay 1 (half-high optical drive bay), or a slim optical drive is installed in the half-high bay 1, or both.

## Controllers for internal storage

The following table lists the internal RAID controllers and additional options that are used for the internal storage of the TS140 server.

Table 6. Controllers for internal storage

Description	Part number	Maximum supported
ThinkServer RAID 100 Controller	None#	1
ThinkServer RAID 500 Adapter	None*	1
ThinkServer RAID 500 RAID 5 Upgrade	4XC0G88835	1**
ThinkServer RAID 700 Adapter	None*	1

# RAID 100 is an onboard hardware-assist RAID controller.

\* The RAID 500 and RAID 700 adapters are available only via Special Bid.

\*\* RAID 5 upgrade key for RAID 500 Adapter.

ThinkServer RAID 100 is an onboard RAID controller that does *not* consume a PCIe slot. The RAID 500 and RAID 700 PCIe adapters are supported only in the PCIe 3.0 x16 expansion slot 1.

### Configuration notes:

- If the RAID 500 adapter is used in the server, the RAID 700 adapter cannot be used.
- If the RAID 700 adapter is used in the server, the RAID 500 adapter cannot be used.
- If the RAID 500 or RAID 700 adapter is selected, a processor with integrated graphics must be used (a GPU card cannot be used).

**Important:** The RAID 100 controller is not supported by virtualization hypervisors, including VMware vSphere (ESXi), Linux KVM, Xen, and Microsoft Hyper-V.

The following table summarizes features of supported internal storage controllers.

Table 7. Internal storage controller features and specifications summary

Feature	RAID 100	RAID 500	RAID 700
Form factor	Onboard	Low profile	Low profile
Controller chip	Not applicable*	LSI SAS2008	LSI SAS2108
Host interface	Not applicable*	PCIe 2.0 x8	PCIe 2.0 x8
Port interface	6 Gbps SATA	6 Gbps SAS	6 Gbps SAS
Number of internal drive ports	5**	8	8
Internal port connectors	5x L-shape SATA	2x Mini-SAS (SFF-8087)	2x Mini-SAS (SFF-8087)
Drive interface	SATA	SAS, SATA	SAS, SATA
Drive type	HDD, SSD	HDD, SSD	HDD, SSD
Maximum number of drives	4	4***	4***
RAID levels	0/1/10/5	0/1/10, Optional 5/50 (4XC0G88835)	0/1/10/5/50/6
JBOD mode	Yes	Yes	No
Cache	None	None	512 MB
Cache protection	None	None	None#
FastPath	None	None	None

Feature	RAID 100	RAID 500	RAID 700
CacheCade Pro 2.0	None	None	None

\* RAID 100 is a hardware-assist, software RAID feature (Intel Rapid Storage Technology Enterprise [RSTe]) integrated into the Intel C226 Platform Controller Hub (PCH).

\*\* Four internal ports are used for SATA HDDs or SSDs, and the remaining port is used for an optical drive.

\*\*\* The controller can support up to eight drives, however, the maximum number of drive bays in the TS140 is four.

# The TS140 does not support the battery option for the RAID 700.

The following table lists drive types and internal drive bay configurations that are supported by the internal RAID controllers in the TS140.

Table 8. RAID controllers and HBAs, drive types, and internal drive bays

Storage controller	Drive type	4x 3.5-in. non-hot-swap drive bays
RAID 100	NL SATA HDD	Yes
RAID 500 RAID 700	SATA SSD	Yes

## Drives for internal storage

The TS140 server supports the internal drive options listed in the following table.

Table 9. Internal drive options

Description	Part number	Maximum supported
<b>3.5-inch non-hot-swap HDDs - NL SATA 6 Gbps</b>		
ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19502	4
ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19503	4
ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19504	4
ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19505	4
ThinkServer 3.5" 6TB 7.2K Enterprise SATA 6Gbps Hard Drive	4XB0G88749	4
<b>2.5-inch non-hot-swap HDDs (2.5-inch HDDs in 3.5-inch drive trays) - NL SATA 6 Gbps</b>		
ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hard Drive with 3.5" Tray	4XB0F28633	4
ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive for with 3.5" Tray	4XB0F28634	4
<b>2.5-inch non-hot-swap SSDs (2.5-inch SSDs in 3.5-inch drive trays) - SATA 6 Gbps</b>		
ThinkServer 2.5" 120GB Value Read-Optimized SATA 6Gbps SSD with 3.5" Tray	4XB0F28619	4
ThinkServer 2.5" 240GB Value Read-Optimized SATA 6Gbps SSD with 3.5" Tray	4XB0F28620	4
ThinkServer 2.5" 300GB Value Read-Optimized SATA 6Gbps SSD with 3.5" Tray	4XB0G88720	4
ThinkServer 2.5" 480GB Value Read-Optimized SATA 6Gbps SSD with 3.5" Tray	4XB0F28621	4

## Optical drives

The TS140 server supports the optical drive options listed in the following table.

Table 10. Optical drive options

Description	Part number	Maximum supported
Half high optical drives		
ThinkServer Half High SATA DVD-RW Optical Disk Drive	None*	1
ThinkServer Half High SATA DVD-ROM Optical Disk Drive	None*	1
Slim optical drives		
ThinkServer Slim SATA DVD-RW Optical Disk Drive	None*	1
ThinkServer Slim SATA DVD-ROM Optical Disk Drive	None*	1

\* Optical drives are included in select Relationship and TopSeller models and can be configured for custom (Configure-to-Order and Special Bid) models.

The SATA Optical Disk Drives support the following types of media: CD-R, CD-ROM, CD-RW, DVD-R, DVD-R (dual-layer recording), DVD-RAM, DVD-RW, DVD+R, DVD+R (dual-layer recording), and DVD+RW.

### Configuration notes:

- A slim optical drive allows support for up to four 3.5-inch internal drives in the server without an internal backup unit or up to three 3.5-inch internal drives in the server with an internal backup unit.
- The 3.5" HDD to 5.25" Tray Convertor with Slim ODD Kit (0C19529) is required to support a slim optical drive.
- A half high optical drive limits the maximum number of 3.5-inch internal drives to three in the server without an internal backup unit or up to two 3.5-inch internal drives in the server with an internal backup unit.

## Internal backup drives

The TS140 server supports the internal backup drive options listed in the following table.

Table 11. Internal backup drive options

Description	Part number	Maximum supported
Internal RDX backup unit (USB)		
ThinkServer Internal RDX Tape Drive	4XF0F28769	1
Cartridges for RDX backup unit		
ThinkServer 1TB SATA 3Gbps RDX Cartridge	4XB0F28660	1
ThinkServer 2TB SATA 3Gbps RDX Cartridge	4XB0G88711	1

## I/O expansion

The TS140 server has four I/O expansion slots:

- Slot 1: PCIe 3.0 x16 (x16-wired); full-height, half-length
- Slot 2: PCIe 2.0 x1 (x1-wired); full-height, half-length
- Slot 3: PCIe 2.0 x16 (x4-wired); full-height, half-length
- Slot 4: PCI 32 bit / 33 MHz (5 V); full-height, half-length

The following adapter types are supported:

- RAID adapters (Refer to the Controllers for internal storage section)
- Network adapters (Refer to the Network adapters section)
- Serial and parallel port adapters (Refer to the following table)

The TS140 server supports the serial and parallel port adapter options that are listed in the following table.

Table 12. Serial and parallel port adapter options

Description	Part number	Maximum supported
PCIe adapters		
ThinkServer Dual Serial Port PCIe Adapter	0C19511	3
PCI adapters		
ThinkServer Single Parallel Port PCI Adapter	0C19508	1
ThinkServer Single Serial Port PCI Adapter	0C19509	1
ThinkServer Dual Serial Port PCI Adapter	0C19510	1

## Network adapters

The TS140 server has one integrated Gigabit Ethernet port that is based on the Intel I217LM NIC (a shared port for operating system access and management network).

The onboard NIC has the following features:

- 1 Gb Ethernet IEEE 802.3, 802.3u, and 802.3ab PHY specifications compliant
- Integrated PHY for 10/100/1000 Mbps with speed and duplex auto-negotiation
- Energy Efficient Ethernet (IEEE 802.3az)
- Wake on LAN
- VLAN tagging (IEEE 802.1Q)
- Class of Service (CoS) priority (IEEE 802.1p) marking
- TCP/UDP checksum and segmentation offload (IPv4 and IPv6)
- Receive Side Scaling
- Jumbo Frames (up to 9K)
- Timing and Synchronization (IEEE 802.1as / IEEE 1588)
- Load balancing and failover teaming support:
  - Adapter fault tolerance (AFT)
  - Switch fault tolerance (SFT)
  - Adaptive load balancing (ALB)

**Important:** The onboard I217LM GbE port does not support VMware vSphere (ESXi).

The following table lists the network adapter options for the TS140 server.

Table 13. Network adapter options

Description	Part number	Maximum supported
ThinkServer CT2 1Gbps Single Port Base-T Ethernet Adapter by Intel (1x RJ-45 port)	4XC0F28725	3
ThinkServer 1Gbps Ethernet I350-T2 Server Adapter by Intel (2x RJ-45 ports)	0C19506	2
ThinkServer 1Gbps Ethernet I350-T4 Server Adapter by Intel (4x RJ-45 ports)	0C19507	2

## GPU adapters

The TS140 server supports the GPU adapter options that are listed in the following table.

**Note:** A GPU adapter must be configured for server models that use processors without integrated graphics; a GPU adapter is optional for server models that use processors with integrated graphics.

Table 14. GPU adapter options

Description	Part number	Maximum supported
ThinkServer 1GB NVS 315 PCIe x16 Graphic Adapter by NVIDIA	4X60G88210	1

## Power supplies

The TS140 server supports one 280 W AC (100-240 V) fixed power supply or one 450 W AC (100-240 V) fixed power supply. A line cord is included with the server.

## Systems management

The ThinkServer TS140 models with Intel Xeon E3-1200 v3 processors support Intel Active Management Technology (AMT) which provides out-of-band, hardware-based advanced system control, monitoring, alerting, and remote presence functions. The TS140 models with Intel Core-i3, Pentium, or Celeron processors support Intel Standard Manageability (ISM), which is a subset of the AMT features.

Both AMT and ISM offer the following features:

- Out-of-band management
- System health and status monitoring
- System event log and alerting
- Hardware inventory
- Boot device selection
- Remote power control
- Serial over LAN
- IDE Redirect for mounting remote media

In addition, AMT supports KVM (keyboard, video, mouse) redirection (KVM redirection requires an Intel Xeon E3-1200 v3 processor with integrated graphics).

**Important:** Health monitoring, event log, alerts, hardware inventory, boot device selection, and remote power control features are accessible out-of-band with a web browser. Serial over LAN, IDE Redirect, and KVM redirection features require third-party tools that are not supplied or supported by Lenovo.

Both AMT and ISM operate independently of the server and remain operational even if the server is powered off. Out-of-band management is performed through the Ethernet port 0, which is a shared port for data and management.

AMT and ISM support the following management protocols:

- DASH 1.1
- WS-MAN
- SNMP Platform Event Traps (PET)

AMT and ISM support the following management user interfaces:

- Web browser
- A third-party platform management software, including but not limited to the following tools:
  - RealVNC Viewer Plus (for remote KVM)
  - Intel Platform Solution Manager (for comprehensive support of AMT features)

Lenovo offers the following software tools that can help you set up, use, and maintain the server at no additional cost:

- ThinkServer EasyStartup  
The ThinkServer EasyStartup tool simplifies the process of configuring RAID and installing supported Microsoft Windows and Linux operating systems, VMware hypervisors, and device drivers on a ThinkServer system.
- ThinkServer EasyUpdate  
The ThinkServer EasyUpdate firmware update tool enables you to maintain your server firmware up-to-date and helps you avoid unnecessary server outages.
- ThinkServer Diagnostics  
The ThinkServer Diagnostics software speeds up troubleshooting tasks to reduce service time.

## Rack installation

The ThinkServer TS140 can be mounted in a rack cabinet by using the tower to rack conversion kit that is listed in the following table. The tower to rack conversion kit includes a shelf on which the server is placed, sliding rails for mounting a shelf, and a cable management arm (CMA).

Table 15. Rack installation options

Description	Part number	Maximum supported
ThinkServer Tower to Rack Shelf Conversion Kit	0C19515	1

## Operating systems

The ThinkServer TS140 supports the following operating systems:

- Microsoft (client operating systems)
  - Windows 7 Ultimate (x86 and x64) SP1
  - Windows 7 Professional (x86 and x64) SP1
  - Windows 8 (x86 and x64)
  - Windows 8 Professional (x86 and x64)
  - Windows 8.1 (x86 and x64)
- Microsoft (server operating systems)
  - Windows Server 2008 R2 x64 SP1 Foundation
  - Windows Server 2008 R2 x64 SP1 Standard (including Hyper-V)
  - Windows Server 2008 R2 x64 SP1 Enterprise (including Hyper-V)
  - Windows Server 2008 R2 x64 SP1 Datacenter (including Hyper-V)
  - Windows Small Business Server 2011 Essentials
  - Windows Small Business Server 2011 Standard
  - Windows Small Business Server 2011 Premium Add-on (including Hyper-V)
  - Windows Multipoint Server 2011
  - Windows Server 2012 Foundation
  - Windows Server 2012 Essentials
  - Windows Server 2012 Standard (including Hyper-V)
  - Windows Server 2012 Datacenter (including Hyper-V)
  - Windows Storage Server 2012 Standard
  - Windows Server 2012 R2 Foundation
  - Windows Server 2012 R2 Essentials
  - Windows Server 2012 R2 Standard (including Hyper-V)
  - Windows Server 2012 R2 Datacenter (including Hyper-V)
  - Hyper-V Server 2012 R2
  - Windows Storage Server 2012 R2 Standard
  - Microsoft Windows Server 2016
- Red Hat
  - Red Hat Enterprise Linux Server 6.5 (x86 and x64)
  - Red Hat Enterprise Linux Server 6.8 (x86 and x64)
  - Red Hat Enterprise Linux Server 7.0
  - Red Hat Enterprise Linux Server 7.1
  - Red Hat Enterprise Linux Server 7.2
- VMware
  - VMware ESXi 5.1 U2
  - VMware ESXi 5.1 U3
  - VMware ESXi 5.5
  - VMware ESXi 5.5 U1
  - VMware ESXi 5.5 U2
  - VMware ESXi 5.5 U3

**Important:** VMware ESXi support requires an Intel Xeon E3-1200 v3 processor and a PCIe RAID adapter. The onboard RAID 100 adapter and the shared GbE port (I217LM) are not supported by VMware ESXi.

For the latest information about the specific versions and service levels that are supported and any other prerequisites, see the Operating System Interoperability Guide: <http://lenovopress.com/redposig>.

## Physical specifications

The TS140 has the following dimensions and weight (approximate):

- Height: 375 mm (14.8 in.)
- Width: 175 mm (6.9 in.)
- Depth: 431 mm (17.0 in.)
- Weight:
  - Maximum configuration without packaging: 13.0 kg (28.7 lb)
  - Maximum configuration with packaging: 15.5 kg (34.2 lb)

## Operating environment

The TS140 server is supported in the following environment:

- Air temperature:
  - Operating: 10 °C - 35 °C (50 °F - 95 °F)
  - Storage: -40 °C - 70 °C (-40 °F - 158 °F) in the original shipping package
- Altitude: 0 m - 3,048 m (0 ft - 10,000 ft) in an unpressurized environment
- Humidity:
  - Operating: 8% - 80% (non-condensing)
  - Storage without a package: 8% - 80% (non-condensing)
  - Storage in the original shipping package: 8% - 90% (non-condensing)
- Electrical:
  - 100 - 127 (nominal) V AC; 50 Hz or 60 Hz
  - 200 - 240 (nominal) V AC; 50 Hz or 60 Hz

## Regulatory compliance

The TS140 server conforms to the following regulations:

- RoHS
- FCC - Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, Class A
- EU Council Directive 2004/108/EC
- European Standard EN55022, Class A
- Korea Class A compliance
- Taiwan Class A compliance
- Japan VCCI, Class A

## Warranty

The ThinkServer TS140 has a three-year or one-year warranty (model dependent) with 24x7 standard call center support and 9x5 next business day onsite coverage. Lenovo offers warranty maintenance upgrades and post-warranty maintenance agreements with a well-defined scope of services, including service hours, response time, and length of service coverage.

The Lenovo QuickPick tool helps locate compatible accessories and services and warranty information. Services offered may vary by geographic location. Access the tool via the following URL:  
<http://lenovoquickpick.com>

The following table explains warranty service definitions in more detail.

Table 16. Warranty service definitions

Term	Description
On-site service	A service technician will go to the client's location for equipment service.
24x7x4 hour	A service technician is scheduled to arrive at the client's location within four hours after remote problem determination is completed. Lenovo provides service around the clock, every day, including Lenovo holidays.
24x7x8 hour	A service technician is scheduled to arrive at the client's location within eight hours after remote problem determination is completed. Lenovo provides service around the clock, every day, including Lenovo holidays.
9x5x4 hour	A service technician is scheduled to arrive at the client's location within four business hours after remote problem determination is completed. Lenovo provides service 8:00 am - 5:00 pm in the client's local time zone, Monday-Friday, excluding Lenovo holidays. For example, if a customer reports an incident at 3:00 pm on Friday, the technician will arrive by 10:00 am the following Monday.
9x5 next business day	A service technician is scheduled to arrive at the client's location on the business day after remote problem determination is completed. Lenovo provides service 8:00 am - 5:00 pm in the client's local time zone, Monday - Friday, excluding Lenovo holidays. Calls received after 4:00 pm local time require an extra business day for service dispatch.

The following Lenovo warranty service upgrades are available:

- Warranty and maintenance service upgrades:
  - Three, four, or five years of 9x5 or 24x7 service coverage
  - Onsite response time from next business day to 4 hour same-day
  - Warranty extension of up to 5 years
  - Post warranty extensions offered in 1-year increments
- Priority Technical Support  
Lenovo's Priority Support Offering enhances our award-winning call center support to provide top priority queue assignment to specialized Lenovo technicians. Priority support accelerates call center troubleshooting to get your problems resolved quickly, and includes other value-added support for Lenovo provided software tools. Priority support can be purchased stand alone to match the base warranty of your system or in convenient bundles with our same-day response services.
- Keep Your Drive Multi-Drive  
Lenovo's Keep Your Drive Multi-Drive service is a multi-drive hard drive retention offering that ensures your data is always under your control, regardless of the number of hard drives that are installed in your Lenovo server. In the unlikely event of a hard drive failure, you retain possession of your hard drive while Lenovo replaces the failed drive part. Your data stays safely on your premises, in your hands. Keep Your Drive Multi-Drive covers multiple drives and multiple failures with one service offering at one value price. This service can be purchased stand-alone to match the base warranty of your system or in convenient bundles with our same-day response services.

## External storage systems

The TS140 server can be attached to external NAS storage via 1 Gb Ethernet network, or SAN storage systems via 1 Gb iSCSI with an iSCSI software initiator in the operating system. The following table lists the external storage systems that are offered by Lenovo and support 1 Gb Ethernet NAS or 1 Gb iSCSI connectivity.

Table 17. External storage systems

Description	Part number
<b>Lenovo N Series (NAS connectivity)</b>	
Lenovo Storage N3310	70FX / 70FY*
Lenovo Storage N4610	70G0 / 70G1*
<b>Lenovo Storage S Series (iSCSI connectivity)</b>	
Lenovo Storage S2200 LFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64114B1
Lenovo Storage S2200 LFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64114B2
Lenovo Storage S2200 SFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64114B3
Lenovo Storage S2200 SFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64114B4
Lenovo Storage S3200 LFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64116B1
Lenovo Storage S3200 LFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64116B2
Lenovo Storage S3200 SFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64116B3
Lenovo Storage S3200 SFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64116B4
<b>Lenovo Storage V Series (iSCSI connectivity)</b>	
Lenovo Storage V3700 V2 LFF Control Enclosure	6535C1D
Lenovo Storage V3700 V2 LFF Control Enclosure (Top Seller)	6535EC1
Lenovo Storage V3700 V2 SFF Control Enclosure	6535C2D
Lenovo Storage V3700 V2 SFF Control Enclosure (Top Seller)	6535EC2
Lenovo Storage V3700 V2 XP LFF Control Enclosure	6535C3D
Lenovo Storage V3700 V2 XP LFF Control Enclosure (Top Seller)	6535EC3
Lenovo Storage V3700 V2 XP SFF Control Enclosure	6535C4D
Lenovo Storage V3700 V2 XP SFF Control Enclosure (Top Seller)	6535EC4
Lenovo Storage V5030 LFF Control Enclosure 3Yr S&S	6536C12
Lenovo Storage V5030 LFF Control Enclosure 5Yr S&S	6536C32
Lenovo Storage V5030 SFF Control Enclosure 3Yr S&S	6536C22
Lenovo Storage V5030 SFF Control Enclosure 5Yr S&S	6536C42
<b>IBM Storwize for Lenovo (iSCSI connectivity)</b>	
IBM Storwize V3500 3.5-inch Dual Control Storage Controller Unit	6096CU2**
IBM Storwize V3500 2.5-inch Dual Control Storage Controller Unit	6096CU3**
IBM Storwize V3700 3.5-inch Storage Controller Unit	6099L2C
IBM Storwize V3700 2.5-inch Storage Controller Unit	6099S2C
IBM Storwize V3700 2.5-inch DC Storage Controller Unit	6099T2C
IBM Storwize V5000 LFF Control Enclosure, w/3 Yr S&S	6194L2C†
IBM Storwize V5000 LFF Control Enclosure, w/3 Yr S&S (LA)	6194L2L‡
IBM Storwize V5000 LFF Control Enclosure, w/5 Yr S&S	61941A1†
IBM Storwize V5000 LFF Control Enclosure, w/5 Yr S&S (LA)	61941AL‡

Description	Part number
IBM Storwize V5000 SFF Control Enclosure, w/3 Yr S&S	6194S2C†
IBM Storwize V5000 SFF Control Enclosure, w/3 Yr S&S (LA)	6194S2L‡
IBM Storwize V5000 SFF Control Enclosure, w/5 Yr S&S	61941C1†
IBM Storwize V5000 SFF Control Enclosure, w/5 Yr S&S (LA)	61941CL‡
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/3 Yr S&S	6195SC5†
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/3 Yr S&S (LA)	6195SCL‡
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/5 Yr S&S	61951F1†
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/5 Yr S&S (LA)	61951FL‡

\* Machine Type; see the respective Product Guide in the NAS Storage category (<http://lenovopress.com/storage/nas>) for models.

\*\* Available only in China.

† Available worldwide except Latin America.

‡ Available only in Latin America.

For more information, see the list of Product Guides in the following categories:

- Lenovo N Series storage: <http://lenovopress.com/storage/nas>
- Lenovo S Series storage: <http://lenovopress.com/storage/san/lenovo>
- IBM storage: <http://lenovopress.com/storage/san/ibm>

## External backup units

The TS140 can be connected to an external RDX backup unit via USB. The following table lists ordering information for the RDX backup unit and RDX cartridges.

Table 18. External backup units

Description	Part number
External RDX unit	
ThinkServer External RDX Tape Drive	4XF0G88929
RDX cartridges	
ThinkServer 1TB 3Gbps RDX Cartridge	4XB0F28660
ThinkServer 2TB SATA 3Gbps RDX Cartridge	4XB0G88711

For more information, see the Product Guide: <http://lenovopress.com/tips0894-rdx-usb-30>.

## Top-of-rack Ethernet switches

The following table lists the top-of-rack Ethernet switches that are offered by Lenovo that can be used in ThinkServer TS140 solutions.

Table 19. Top-of-rack Ethernet switches

Description	Part number
1 Gb Ethernet top-of-rack switches	
Lenovo RackSwitch G7028 (Rear to Front)	7159BAX
Lenovo RackSwitch G7052 (Rear to Front)	7159CAX
Lenovo RackSwitch G8052 (Rear to Front)	7159G52

For more information, see the list of Product Guides in the Top-of-rack Switches category: <http://lenovopress.com/servers/options/switches>

## Rack cabinets

The following table lists the rack cabinets that are offered by Lenovo that can be used in ThinkServer TS140 solutions.

Table 20. Rack cabinets

Description	Part number
11U Rack Office Enablement Kit	201886X
25U S2 Standard Rack	93072RX
25U Static S2 Standard Rack	93072PX
42U S2 Standard Rack	93074RX
42U 1100mm Enterprise V2 Dynamic Rack	93634PX
42U 1100mm Enterprise V2 Dynamic Expansion Rack	93634EX
42U 1200mm Deep Dynamic Rack	93604PX
42U 1200mm Deep Static Rack	93614PX
42U Enterprise Rack	93084PX
42U Enterprise Expansion Rack	93084EX

For more information, see the list of Product Guides in the Rack Cabinets category:  
<http://lenovopress.com/servers/options/racks>

## KVM switches and consoles

The following table lists the KVM switches and consoles that are offered by Lenovo that can be used in ThinkServer TS140 solutions.

Table 21. KVM switch and console options

Description	Part number
Consoles	
1U 18.5" Standard Console (without keyboard)	17238BX
Console keyboards	
Keyboard w/ Int. Pointing Device USB - US Eng 103P RoHS v2	46W6712
Keyboard w/ Int. Pointing Device USB - Arabic 253 RoHS v2	46W6713
Keyboard w/ Int. Pointing Device USB - Belg/UK 120 RoHS v2	46W6714
Keyboard w/ Int. Pointing Device USB - Chinese/US 467 RoHS v2	46W6715
Keyboard w/ Int. Pointing Device USB - Czech 489 RoHS v2	46W6716
Keyboard w/ Int. Pointing Device USB - Danish 159 RoHS v2	46W6717
Keyboard w/ Int. Pointing Device USB - Dutch 143 RoHS v2	46W6718
Keyboard w/ Int. Pointing Device USB - French 189 RoHS v2	46W6719
Keyboard w/ Int. Pointing Device USB - Fr/Canada 445 RoHS v2	46W6720
Keyboard w/ Int. Pointing Device USB - German 129 RoHS v2	46W6721
Keyboard w/ Int. Pointing Device USB - Greek 219 RoHS v2	46W6722
Keyboard w/ Int. Pointing Device USB - Hebrew 212 RoHS v2	46W6723
Keyboard w/ Int. Pointing Device USB - Hungarian 208 RoHS v2	46W6724
Keyboard w/ Int. Pointing Device USB - Italian 141 RoHS v2	46W6725

Description	Part number
Keyboard w/ Int. Pointing Device USB - Japanese 194 RoHS v2	46W6726
Keyboard w/ Int. Pointing Device USB - Korean 413 RoHS v2	46W6727
Keyboard w/ Int. Pointing Device USB - LA Span 171 RoHS v2	46W6728
Keyboard w/ Int. Pointing Device USB - Norwegian 155 RoHS v2	46W6729
Keyboard w/ Int. Pointing Device USB - Polish 214 RoHS v2	46W6730
Keyboard w/ Int. Pointing Device USB - Portugese 163 RoHS v2	46W6731
Keyboard w/ Int. Pointing Device USB - Russian 441 RoHS v2	46W6732
Keyboard w/ Int. Pointing Device USB - Slovak 245 RoHS v2	46W6733
Keyboard w/ Int. Pointing Device USB - Spanish 172 RoHS v2	46W6734
Keyboard w/ Int. Pointing Device USB - Swed/Finn 153 RoHS v2	46W6735
Keyboard w/ Int. Pointing Device USB - Swiss F/G 150 RoHS v2	46W6736
Keyboard w/ Int. Pointing Device USB - Thai 191 RoHS v2	46W6737
Keyboard w/ Int. Pointing Device USB - Turkish 179 RoHS v2	46W6738
Keyboard w/ Int. Pointing Device USB - UK Eng 166 RoHS v2	46W6739
Keyboard w/ Int. Pointing Device USB - US Euro 103P RoHS v2	46W6740
Keyboard w/ Int. Pointing Device USB - Slovenian 234 RoHS v2	46W6741
<b>Console switches</b>	
Global 4x2x32 Console Manager (GCM32)	1754D2X
Global 2x2x16 Console Manager (GCM16)	1754D1X
Local 2x16 Console Manager (LCM16)	1754A2X
Local 1x8 Console Manager (LCM8)	1754A1X
<b>Console cables</b>	
Single Cable USB Conversion Option (UCO)	43V6147
USB Conversion Option (4 Pack UCO)	39M2895
Virtual Media Conversion Option Gen2 (VCO2)	46M5383
Serial Conversion Option (SCO)	46M5382

For more information, see the list of Product Guides in the KVM Switches and Consoles category:  
<http://lenovopress.com/servers/options/kvm>

## Power distribution units

The following table lists the power distribution units (PDUs) that are offered by Lenovo that can be used in ThinkServer TS140 solutions.

Table 22. Power distribution units

Description	Part number
<b>0U Basic PDUs</b>	
0U 36 C13/6 C19 24A/200-240V 1 Phase PDU with NEMA L6-30P line cord	00YJ776
0U 36 C13/6 C19 32A/200-240V 1 Phase PDU with IEC60309 332P6 line cord	00YJ777
0U 21 C13/12 C19 32A/200-240V/346-415V 3 Phase PDU with IEC60309 532P6 line cord	00YJ778
0U 21 C13/12 C19 48A/200-240V 3 Phase PDU with IEC60309 460P9 line cord	00YJ779
<b>Switched and Monitored PDUs</b>	

Description	Part number
0U 20 C13/4 C19 Switched and Monitored 24A/200-240V/1Ph PDU w/ NEMA L6-30P line cord	00YJ781
0U 20 C13/4 C19 Switched and Monitored 32A/200-240V/1Ph PDU w/ IEC60309 332P6 line cord	00YJ780
0U 18 C13/6 C19 Switched / Monitored 32A/200-240V/346-415V/3Ph PDU w/ IEC60309 532P6 cord	00YJ782
0U 12 C13/12 C19 Switched and Monitored 48A/200-240V/3Ph PDU w/ IEC60309 460P9 line cord	00YJ783
1U 9 C19/3 C13 Switched and Monitored DPI PDU (without line cord)	46M4002
1U 9 C19/3 C13 Switched and Monitored 60A 3Ph PDU with IEC 309 3P+Gnd cord	46M4003
1U 12 C13 Switched and Monitored DPI PDU (without line cord)	46M4004
1U 12 C13 Switched and Monitored 60A 3 Phase PDU with IEC 309 3P+Gnd line cord	46M4005
Ultra Density Enterprise PDUs (9x IEC 320 C13 + 3x IEC 320 C19 outlets)	
Ultra Density Enterprise C19/C13 PDU Module (without line cord)	71762NX
Ultra Density Enterprise C19/C13 PDU 60A/208V/3ph with IEC 309 3P+Gnd line cord	71763NU
C13 Enterprise PDUs (12x IEC 320 C13 outlets)	
DPI C13 Enterprise PDU+ (without line cord)	39M2816
DPI Single Phase C13 Enterprise PDU (without line cord)	39Y8941
C19 Enterprise PDUs (6x IEC 320 C19 outlets)	
DPI Single Phase C19 Enterprise PDU (without line cord)	39Y8948
DPI 60A 3 Phase C19 Enterprise PDU with IEC 309 3P+G (208 V) fixed line cord	39Y8923
Front-end PDUs (3x IEC 320 C19 outlets)	
DPI 30amp/125V Front-end PDU with NEMA L5-30P line cord	39Y8938
DPI 30amp/250V Front-end PDU with NEMA L6-30P line cord	39Y8939
DPI 32amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8934
DPI 60amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8940
DPI 63amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8935
Universal PDUs (7x IEC 320 C13 outlets)	
DPI Universal 7 C13 PDU (with 2 m IEC 320-C19 to C20 rack power cord)	00YE443
NEMA PDUs (6x NEMA 5-15R outlets)	
DPI 100-127V PDU with fixed NEMA L5-15P line cord	39Y8905
Line cords for PDUs that ship without a line cord	
DPI 30a Line Cord (NEMA L6-30P)	40K9614
DPI 32a Line Cord (IEC 309 P+N+G)	40K9612
DPI 32a Line Cord (IEC 309 3P+N+G)	40K9611
DPI 60a Cord (IEC 309 2P+G)	40K9615
DPI 63a Cord (IEC 309 P+N+G)	40K9613
DPI Australian/NZ 3112 Line Cord	40K9617

For more information, see the list of Product Guides in the Power Distribution Units category:  
<http://lenovopress.com/servers/options/pdu>

## Uninterruptible power supply units

The following table lists the uninterruptible power supply (UPS) units that are offered by Lenovo that can be used in ThinkServer TS140 solutions.

Table 23. Uninterruptible power supply units

Description	Part number
Tower UPS units	
T1kVA Tower UPS (100-125VAC)	55951AX
T1kVA Tower UPS (200-240VAC)	55951KX
T1.5kVA Tower UPS (100-125VAC)	55952AX
T1.5kVA Tower UPS (200-240VAC)	55952KX
Rack or Tower UPS units	
RT1.5kVA 2U Rack or Tower UPS (100-125VAC)	55941AX
RT1.5kVA 2U Rack or Tower UPS (200-240VAC)	55941KX
RT2.2kVA 2U Rack or Tower UPS (100-125VAC)	55942AX
RT2.2kVA 2U Rack or Tower UPS (200-240VAC)	55942KX
RT3kVA 2U Rack or Tower UPS (100-125VAC)	55943AX
RT3kVA 2U Rack or Tower UPS (200-240VAC)	55943KX
RT5kVA 3U Rack or Tower UPS (200-240VAC)	55945KX
RT6kVA 3U Rack or Tower UPS (200-240VAC)	55946KX
RT8kVA 6U Rack or Tower UPS (200-240VAC)	55948KX
RT11kVA 6U Rack or Tower UPS (200-240VAC)	55949KX
RT8kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC)	55948PX
RT11kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC)	55949PX

For more information, see the list of Product Guides in the Uninterruptible Power Supply Units category:  
<http://lenovopress.com/servers/options/ups>

## Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region specific offers please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<http://www.lenovofs.com>

## Related publications and links

For more information, see these resources:

- ThinkServer TS140 product page  
<http://shop.lenovo.com/us/en/systems/servers/towers/thinkserver/ts140>
- ThinkServer TS140 User Guide and Hardware Maintenance Manual  
[https://download.lenovo.com/ibmdl/pub/pc/pccbbs/thinkservers/ts140hmm\\_en.pdf](https://download.lenovo.com/ibmdl/pub/pc/pccbbs/thinkservers/ts140hmm_en.pdf)
- Lenovo Quick Pick for ThinkServer TS140  
<http://www.lenovoquickpick.com/usa/system/thinkserver/ts-series/thinkserver-ts140>
- Lenovo Support for ThinkServer TS140  
<http://support.lenovo.com/us/en/products/servers/thinkserver-tower-servers/thinkserver-ts140>
- ThinkServer Power Planner  
<http://support.lenovo.com/us/en/downloads/ds101155>
- Lenovo Press Product Guides for servers and options (filter by the Product Guide resource type)  
<http://lenovopress.com>
- Lenovo PSREF for ThinkServer TS140  
[http://psref.lenovo.com/Product/ThinkServer\\_TS140](http://psref.lenovo.com/Product/ThinkServer_TS140)

## Related product families

Product families related to this document are the following:

- [1-Socket Tower Servers](#)

## Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.  
8001 Development Drive  
Morrisville, NC 27560  
U.S.A.

Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2025. All rights reserved.

This document, LP0034, was created or updated on March 21, 2017.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:  
<https://lenovopress.lenovo.com/LP0034>
- Send your comments in an e-mail to:  
[comments@lenovopress.com](mailto:comments@lenovopress.com)

This document is available online at <https://lenovopress.lenovo.com/LP0034>.

## Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkServer®

The following terms are trademarks of other companies:

Intel®, Celeron®, Intel Core®, Pentium®, and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Hyper-V®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

IBM® and Storwize® are trademarks of IBM in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.