

Introducing the New Single-Socket ThinkSystem V2 Servers

Article

Ideal for a first server and for growing businesses, the ThinkSystem single-socket rack and tower servers are reliable, performance-optimized, flexible and secure choices to run your business applications.

ThinkSystem ST250 V2



An excellent choice for expanding businesses looking for enterprise-level power in an easily-managed tower form factor.

Key features:

- Latest Intel Xeon E-2300 processor, up to 8 cores at 95W.
- Up to 128GB TruDDR4 memory at 3200MHz
- Flexible enterprise storage options with up to 16x 2.5-inch hot-swap or 8x 3.5-inch hot-swap and simple-swap drive bays
- Simple-swap drive configuration include support for an NVMe drive for tiered storage
- Support for an optical drive and an RDX backup unit in media bays
- Data center data protection provided by hardware RAID adapters
- Support for the NVIDIA A2000 or Quadro RTX T1000 GPUs
- Integrated systems management with Lenovo XClarity
- 2x integrated Gigabit Ethernet ports
- Supports a 250W or 300W fixed power support or dual redundant 550W power supplies

Learn more with these resources:

- [Product web page](#)

- [Datasheet](#)
- [Product Guide](#)
- [3D Interactive Tour](#)

ThinkSystem SR250 V2



The ideal single-socket 1U rack server for growing businesses, offering power, reliability and flexibility for space constrained installations.


Key features:

- Latest Intel Xeon E-2300 processor up to 8 cores at 95W
- Up to 128GB TruDDR4 memory at 3200MHz
- Storage flexibility with either 10x 2.5-inch hot-swap drive bays, or 4x 3.5-inch hot-swap or simple-swap drive bays
- Simple-swap drive configuration include support for an NVMe drive for tiered storage
- Data center data protection provided by hardware RAID adapters
- Support for the NVIDIA Quadro RTX T1000 GPU
- Integrated systems management with Lenovo XClarity
- 2x integrated Gigabit Ethernet ports
- Supports a 300W fixed power support or dual redundant 450W power supplies

Learn more with these resources:

- [Product web page](#)
- [Datasheet](#)
- [Product Guide](#)
- [3D Interactive Tour](#)

ThinkSystem ST50 V2

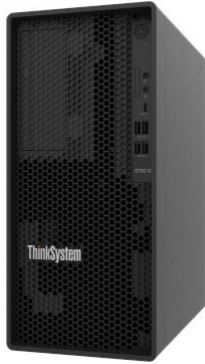

A compact, affordable, performance optimized entry tower for growing businesses, remote/branch offices, and small/home offices.

Key features:

- The latest Intel Xeon E-2300 processor, up to 8 cores at 95W
- Up to 64GB TruDDR4 memory at 3200MHz. Planned support for up to 128GB.
- 2x 3.5-inch SSD/HDD bays, 1x 2.5" SDD bay, 1x NVMe M.2 SSD Module, 1x optical drive bay
- Data center data protection provided by hardware RAID adapters
- Small (17L) tower form factor single socket server
- Easy setup, firmware and remote server management with the latest Intel Active Management Technology
- Support for the NVIDIA Quadro RTX T1000 GPU
- Optional Lenovo XClarity Provisioning Manager Lite (USB version)
- Enhanced power efficiency with 500W Platinum power supply

Learn more with these resources:

- [Product web page](#)
- [Datasheet](#)
- [Product Guide](#)
- [3D Interactive Tour](#)

Related product families

Product families related to this document are the following:

- [ThinkSystem SR250 V2 Server](#)
- [ThinkSystem ST250 V2 Server](#)
- [ThinkSystem ST50 V2 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.

Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, LP1560, was created or updated on March 9, 2022.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1560>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1560>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkSystem®

TruDDR4

XClarity®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Other company, product, or service names may be trademarks or service marks of others.