

Five Highlights of the Lenovo ThinkSystem SD550 V3 Server

Article

The Lenovo ThinkSystem SD550 V3 is an economical two-socket server node in a 2U half-width form factor. Combining the efficiency and density of blades with the value and simplicity of rack-based servers, the SD550 V3 delivers a cost-efficient scale out platform that is thermally designed to deliver maximum performance in the smallest footprint.

The solution consists of the 2U ThinkSystem D3 Chassis containing two SD550 V3 nodes, all with front access. Each node incorporates two 5th Gen Intel Xeon Scalable processors.

The SD550 V3 is well suited for workloads ranging from cloud, to AI and high-performance computing applications like Computer Aided Engineering (CAE) or Electronic Design Automation (EDA).



Figure 1. ThinkSystem SD550 V3

1. Performance and Efficiency

Compute requirements are increasing, while data center space is not. The Lenovo ThinkSystem SD550 V3, powered by up to two 5th generation Intel Xeon Scalable processors, offers incredible core density and performance. The SD550 V3 innovative server design drives new levels of value for the data center.

- **Performance:** Each SD550 V3 node supports high-performance Intel Xeon Platinum processors up to 350W and 60 cores, up to 2TB of DDR5 memory and six hot-swap SAS/SATA/NVMe SSD drives per node for demanding workloads.
- **Density:** Good density with up to 4 nodes and 8 CPUs in a 2U form factor provides flexible and robust IO options – 1Gb, 10Gb, 25Gb, or 100Gb Ethernet. Two low-profile PCIe x16 expansion slots (1x Gen5, 1x Gen4) and one OCP 3.0 slot per node.
- **Efficiency:** Designed with power and cost efficiency in mind, the SD550 V3 reduces power consumption with a shared power design, leveraging redundant power supplies up to 2700W Titanium level high-efficiency (96%) power supplies (Full redundancy is based on configuration and application load). Efficiency is also achieved by large 2U fans and 2U heatsinks providing optimal cooling and minimizing power.

2. Multinode Chassis

The 2U Lenovo ThinkSystem D3 Chassis supports up to 4 nodes. The chassis holds four 1U SD530 V3 nodes or two 2U SD550 V3 nodes. The chassis supports up to 3 CRPS power supplies that are shared among the nodes installed in the chassis. All system management is performed by each of the nodes. An optional OCP NIC 3.0 management port consolidation adapter is available. This adapter offers up to 4 to 1 management port consolidation.

When installing nodes in the chassis, the nodes on the left side are installed right-side up and the nodes on the right are installed upside-down. SD530 V3 and SD550 V3 Nodes can be mixed within the D3 Chassis. The nodes and especially the phase change heatsinks have been specifically designed to work equally well in either orientation.



Figure 2. Front View - SD550 V3 Nodes installed in D3 Chassis

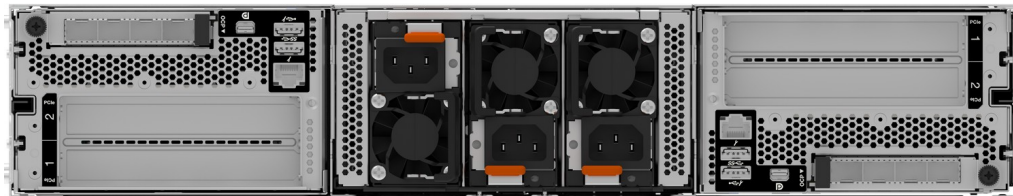


Figure 3. Rear View - SD550 V3 Nodes installed in D3 Chassis (with 2 PSUs)



Figure 4. Front View - SD530 V3 Nodes and SD550 V3 Node installed in D3 Chassis

The advantages of the D3 Enclosure design includes:

- Density - up to four 1U nodes/ 8 CPUs or two 2U nodes / 4 CPUs in 2U of rack space
- Simple Management – No chassis management, all management is performed by the nodes.
- Shared Power Supplies - Shared rear access power supplies support up to 4 nodes.
- Redundancy – 3 PSUs with 2+1 with oversubscription, 2 PSUs with 1+1 without over-subscription or 2 PSUs with over-subscription
- Serviceability – all service is performed from the front on individual nodes
- Fans – Fans are part of each Node. Fan reliability only impacts one node vs the entire chassis
- Efficiency – Only nodes with a heavy workload ramp up their fans saving overall fan power
- Only one set of nodes, not a left and right version for each node simplifying logistics for self-servicers
- Allows for mixing of 1U and 2U nodes within the same chassis.

3. SD550 V3 I/O

The SD550 V3 provides an ample amount of I/O.

- One XCC2 system management port on the rear to connect to a systems-management network. This RJ-45 connector is dedicated for the Lenovo XClarity Controller
- Two or four Ethernet ports on a selection of OCP NIC 3.0 Ethernet adapters
- Two PCIe x16 HHHL slot (Gen4 and Gen5)
- Three USB ports. Two on the rear of server and one on the front
- External LCD diagnostic handset connector on the front of the server
- VGA connector on front of server
- Serial port connector on front of server
- Mini Display port on rear of server



Figure 5. Front – ThinkSystem SD550 V3



Figure 6. Rear – ThinkSystem SD550 V3

4. Enhanced Security

The SD550 V3 includes many security features including Lenovo ThinkShield. This is a collection of secure software design, deployment and operational methods, ThinkShield prevents, detects and remediates against attacks, providing security in the supply chain, below the OS in the server, and from the OS to the cloud. The XClarity system manager simplifies infrastructure processes, handling faults, and adding new servers to the network. It also adds security by monitoring log events.

The SD550 V3 server offers the following electronic security features:

- Secure Boot function of the Intel Xeon processor
- Support for Platform Firmware Resiliency (PFR) with a Lenovo hardware Root of Trust (RoT)
- Firmware signature processes compliant with FIPS and NIST requirements
- Administrator and power-on passwords
- Integrated Trusted Platform Module (TPM) supporting TPM 2.0
- Chassis intrusion software notice

Lenovo's ThinkShield Security is a transparent and comprehensive approach to security that extends to all dimensions of our data center products: from development, to supply chain, and through the entire product lifecycle. This includes Platform Firmware Resiliency (PFR) hardware Root of Trust (RoT) which enables the system to be NIST SP800-193 compliant.

5. XClarity Administrator

Lenovo XClarity Administrator is a centralized resource-management solution designed to reduce complexity, speed response, and enhance the availability of Lenovo ThinkSystem servers.

The XClarity Administrator enables you to define and control pools of infrastructure from your choice of interface, including an intuitive web-based GUI, XClarity Mobile app, Windows PowerShell, Python, or using your own external IT applications by running XClarity Integrator software or integrating with open REST APIs.

XClarity benefits:

- Simplify - Save administrator time by reducing complexity of infrastructure tasks:
- Accelerate - Automate hardware delivery and maintenance:
- Integrate - Integrates into external IT applications, providing the flexibility to manage Lenovo infrastructure without leaving the console of the software that you use regularly:
- Reduce IT Costs - Increase IT staff productivity and efficiency by automating complex, repetitive tasks:

XClarity key features:

- Define servers with reusable, scalable configuration patterns
- Discover, track, and manage hardware inventory
- Monitor hardware and handle alerts, events, and logs, including calling home to open problem records and alert IT staff to a problem
- Manage firmware levels and updates via policies
- Install hypervisors and operating systems to bare metal servers

About the Author

Randall Lundin is a Senior Product Manager in the Lenovo Infrastructure Solution Group. He is responsible for planning and managing ThinkSystem servers. Randall has also authored and contributed to numerous Lenovo Press publications on ThinkSystem products.

Related product families

Product families related to this document are the following:

- [Multi-Node Servers](#)
- [ThinkSystem SD550 V3 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© **Copyright Lenovo 2024. All rights reserved.**

This document, LP1861, was created or updated on April 8, 2024.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1861>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1861>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkShield®

ThinkSystem®

XClarity®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

PowerShell, Windows PowerShell®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.