

ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU

Product Guide

The NVIDIA RTX™ 6000 Ada Generation is the ultimate workstation graphics card designed for professionals who demand maximum performance and reliability to deliver their best work and breakthrough innovations across industries. The RTX 6000 provides the unmatched performance and capabilities essential for high-end design, real-time rendering, AI, and high-performance compute workflows.

Built on the NVIDIA Ada Lovelace architecture, the RTX 6000 combines 142 third-generation RT Cores, 568 fourth-generation Tensor Cores, and 18,176 CUDA® cores with 48GB of error correction code (ECC) graphics memory. This all helps deliver the next generation of AI graphics and petaflop inferencing performance for unprecedented speed-up in rendering, AI, graphics, and compute workloads.

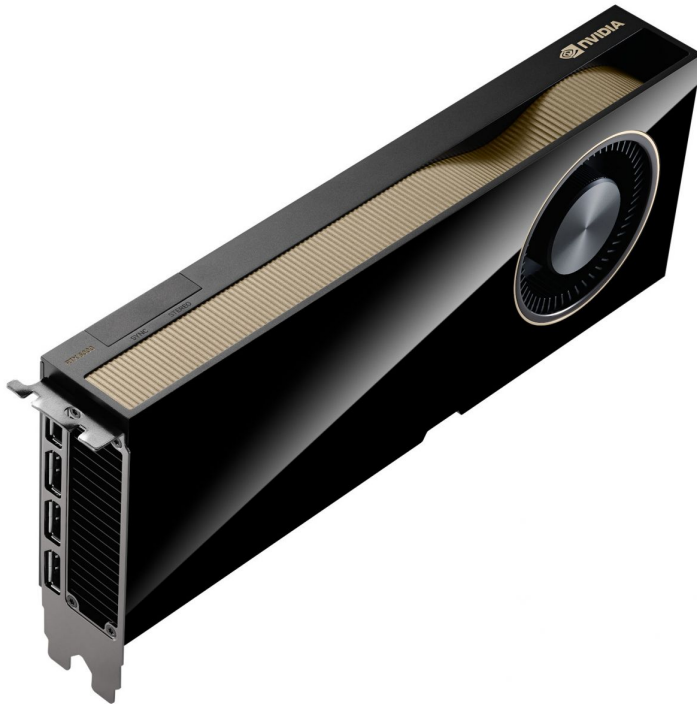


Figure 1. ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU

Did you know?

NVIDIA RTX professional graphics cards are certified with a broad range of professional applications, tested by leading independent software vendors (ISVs) and workstation manufacturers, and backed by a global team of support specialists. Get the peace of mind to focus on what matters with the premier visual computing solution for mission-critical business.

Part number information

The following table shows the part numbers for the RTX 6000 Ada GPU.

Table 1. Ordering information

Part number	Feature code	Description
4X67A89324*	C2DP	ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU

* The GPU is currently only available configure-to-order in supported servers. The option part number is planned to be orderable at a later date.

The PCIe option part numbers includes the following:

- One RTX 6000 Ada GPU with full-height (3U) adapter bracket attached
- Documentation

Features

Key features of the RTX 6000 Ada GPU:

- PCIe Gen 4
- Four DisplayPort 1.4a connectors
- AV1 encode and decode support
- DisplayPort with audio
- 3D stereo support with stereo connector
- NVIDIA GPUDirect® for Video support
- NVIDIA GPUDirect Remote Direct Memory Access (RDMA) support
- NVIDIA virtual GPU (vGPU) software support
- NVIDIA Quadro® Sync II1 compatibility
- NVIDIA RTX Experience
- NVIDIA RTX Desktop Manager software
- NVIDIA RTX IO support
- HDCP 2.2 support
- NVIDIA Mosaic technology

The ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU offers the following features:

- NVIDIA Ada Lovelace Architecture
NVIDIA RTX™ 6000 Ada Generation is the most powerful workstation GPU offering high-performance, real-time ray tracing, AI-accelerated compute, and professional graphics rendering. Building upon the major SM enhancements from the Ada Lovelace GPU, the NVIDIA Ada Lovelace architecture provides more cores, higher clocks, and a larger L2 cache for more performance to enhance ray tracing operations, tensor matrix operations, and frame rates with DLSS 3.0.
- CUDA Cores
The NVIDIA Ada Lovelace architecture-based CUDA Cores offer more than 2X the single-precision floating point (FP32) throughput compared to the previous generation, providing significant performance improvements for graphics workflows such as 3D model development and compute for workloads such as desktop simulation for computer-aided engineering (CAE). The RTX 6000 enables two FP32 primary data paths, doubling the peak FP32 operations.
- 3rd Generation RT Cores

Incorporating 3rd generation ray tracing engines, NVIDIA Ada Lovelace architecture-based GPUs provide incredible ray-traced rendering performance. A single RTX 6000 board can render complex professional models with physically accurate shadows, reflections, and refractions to empower users with instant insight. Working in concert with applications leveraging APIs such as NVIDIA OptiX, Microsoft DXR, and Vulkan ray tracing, systems based on the RTX 6000 will power truly interactive design workflows to provide immediate feedback for unprecedented levels of productivity. The RTX 6000 features up to 2X faster ray-triangle intersection throughput compared to the previous generation.

- **4th Generation Tensor Cores**

Specialized for deep learning matrix multiply and accumulate math operations at the heart of neural network training and inferencing functions, the RTX 6000 includes enhanced Tensor Cores that accelerate more data types and still support the Fine-Grained Structured Sparsity feature that delivers more than 2X throughput for tensor matrix operations compared to the previous generation. New Tensor Cores will accelerate new FP8 precision modes. Independent floating-point and integer data paths allow more efficient execution of workloads using a mix of computation and addressing calculations.

- **5th Generation NVDEC Engine**

NVDEC is well suited for transcoding and video playback applications for real-time decoding. The following video codecs are supported for hardware-accelerated decoding: MPEG-2, VC-1, H.264 (AVCHD), H.265 (HEVC), VP8, VP9, and AV1 video formats. Video encoding at 8K/60 will be achievable for professional video editing.

- **8th Generation NVENC Engine**

NVENC can take on the most demanding 4K or 8K video encoding tasks to free up the graphics engine and the CPU for other operations. The RTX 6000 provides better encoding quality than software-based x264 encoders. The RTX 6000 incorporates AV1 video encoding which is 40% more efficient than H.264 encoding for 4K HDR video. AV1 will provide better quality at the same bitrate bandwidth.

Technical specifications

The following table lists the specifications of the RTX 6000 Ada GPU.

Table 2. RTX 6000 Ada GPU specifications

Feature	Specification
GPU Memory	48 GB GDDR6
Memory Interface	384-bit
Memory Bandwidth	Up to 960 GB/s
ECC	Yes
NVIDIA CUDA Cores	18,176
NVIDIA Tensor Cores	568
NVIDIA RT Cores	142
Single-Precision Performance	91.1 TFLOPS (peak)
RT Core performance	210.6 TFLOPS (peak)
Tensor Performance	1457.0 TFLOPS (peak, with sparsity)
Host Interface	PCIe 4.0 x16
NVLink support	No
Power Consumption	300 W
Thermal Solution	Active cooling
Form Factor	4.4" H x 10.5" L, Dual Slot, Full Height, Full Length
Display Connectors	4x DisplayPort 1.4a
Maximum simultaneous displays	4x 4096 x 2160 @ 120 Hz, 4x 5120 x 2880 @ 60 Hz, 2x 7680 x 4320 @ 60 Hz
Encode / Decode Engines	3x encode, 3x decode (+AV1 encode and decode)
VR Ready	Yes
vGPU software support	NVIDIA vPC/vApps, NVIDIA RTX Virtual Workstation
Graphics APIs	DirectX 12, Shader Model 6.6, OpenGL 4.6, Vulkan 1.3
Compute APIs	CUDA 11.6, DirectCompute, OpenCL 3.0

Server support

The following tables list the ThinkSystem servers that are compatible.

Table 3. Server support (Part 1 of 4)

Part Number	Description	2S AMD V3				2S Intel V3			4S 8S Intel V3			Multi Node		GPU Rich			1S V3			
		SR635 V3 (7D9H / 7D9G)	SR655 V3 (7D9F / 7D9E)	SR645 V3 (7D9D / 7D9C)	SR665 V3 (7D9B / 7D9A)	ST650 V3 (7D7B / 7D7A)	SR630 V3 (7D72 / 7D73)	SR650 V3 (7D75 / 7D76)	SR850 V3 (7D97 / 7D96)	SR860 V3 (7D94 / 7D93)	SR950 V3 (7DC5 / 7DC4)	SD535 V3 (7DD8 / 7DD1)	SD530 V3 (7DDA / 7DD3)	SD550 V3 (7DD9 / 7DD2)	SR670 V2 (7Z22 / 7Z23)	SR675 V3 (7D9Q / 7D9R)	SR680a V3 (7DHE)	SR685a V3 (7DHC)	ST250 V3 (7DCF / 7DCE)	SR250 V3 (7DCM / 7DCL)
4X67A89324	ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Table 4. Server support (Part 2 of 4)

Part Number	Description	Edge				Super Computing				1S Intel V2		2S Intel V2					
		SE350 (7Z46 / 7D1X)	SE350 V2 (7DA9)	SE360 V2 (7DAM)	SE450 (7D8T)	SE455 V3 (7DBY)	SD665 V3 (7D9P)	SD665-N V3 (7DAZ)	SD650 V3 (7D7M)	SD650-I V3 (7D7L)	SD650-N V3 (7D7N)	ST50 V2 (7D8K / 7D8J)	ST250 V2 (7D8G / 7D8F)	SR250 V2 (7D7R / 7D7Q)	ST650 V2 (7Z75 / 7Z74)	SR630 V2 (7Z70 / 7Z71)	SR650 V2 (7Z72 / 7Z73)
4X67A89324	ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Table 5. Server support (Part 3 of 4)

Part Number	Description	AMD V1				Dense V2			4S V2	8S	4S V1		1S Intel V1							
		SR635 (7Y98 / 7Y99)	SR655 (7Y00 / 7Z01)	SR655 Client OS	SR645 (7D2Y / 7D2X)	SR665 (7D2W / 7D2V)	SD630 V2 (7D1K)	SD650 V2 (7D1M)	SD650-N V2 (7D1N)	SN550 V2 (7Z69)	SR850 V2 (7D31 / 7D32)	SR860 V2 (7Z59 / 7Z60)	SR950 (7X11 / 7X12)	SR850 (7X18 / 7X19)	SR850P (7D2F / 2D2G)	SR860 (7X69 / 7X70)	ST50 (7Y48 / 7Y50)	ST250 (7Y45 / 7Y46)	SR150 (7Y54)	SR250 (7Y52 / 7Y51)
4X67A89324	ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Table 6. Server support (Part 4 of 4)

Part Number	Description	2S Intel V1								Dense V1			
		ST550 (7X09 / 7X10)	SR530 (7X07 / 7X08)	SR550 (7X03 / 7X04)	SR570 (7Y02 / 7Y03)	SR590 (7X98 / 7X99)	SR630 (7X01 / 7X02)	SR650 (7X05 / 7X06)	SR670 (7Y36 / 7Y37)	SD530 (7X21)	SD650 (7X58)	SN550 (7X16)	SN850 (7X15)
4X67A89324	ThinkSystem NVIDIA RTX 6000 Ada 48GB PCIe Active GPU	N	N	N	N	N	N	N	N	N	N	N	N

NVIDIA GPU software

This section lists the NVIDIA software that is available from Lenovo.

- [NVIDIA vGPU Software \(vApps, vPC, RTX vWS, and vCS\)](#)
- [NVIDIA AI Enterprise Software](#)
- [NVIDIA HPC Compiler Software](#)

NVIDIA vGPU Software (vApps, vPC, RTX vWS)

Lenovo offers the following virtualization software for NVIDIA GPUs:

- **Virtual Applications (vApps)**

For organizations deploying Citrix XenApp, VMware Horizon RDSH or other RDSH solutions. Designed to deliver PC Windows applications at full performance. NVIDIA Virtual Applications allows users to access any Windows application at full performance on any device, anywhere. This edition is suited for users who would like to virtualize applications using XenApp or other RDSH solutions. Windows Server hosted RDSH desktops are also supported by vApps.

- **Virtual PC (vPC)**

This product is ideal for users who want a virtual desktop but need great user experience leveraging PC Windows® applications, browsers and high-definition video. NVIDIA Virtual PC delivers a native experience to users in a virtual environment, allowing them to run all their PC applications at full performance.

- **NVIDIA RTX Virtual Workstation (RTX vWS)**

NVIDIA RTX vWS is the only virtual workstation that supports NVIDIA RTX technology, bringing advanced features like ray tracing, AI-denoising, and Deep Learning Super Sampling (DLSS) to a virtual environment. Supporting the latest generation of NVIDIA GPUs unlocks the best performance possible, so designers and engineers can create their best work faster. IT can virtualize any application from the data center with an experience that is indistinguishable from a physical workstation — enabling workstation performance from any device.

The following license types are offered:

- **Perpetual license**

A non-expiring, permanent software license that can be used on a perpetual basis without the need to renew. Each Lenovo part number includes a fixed number of years of Support, Upgrade and Maintenance (SUMS).

- **Annual subscription**

A software license that is active for a fixed period as defined by the terms of the subscription license, typically yearly. The subscription includes Support, Upgrade and Maintenance (SUMS) for the duration of the license term.

- **Concurrent User (CCU)**

A method of counting licenses based on active user VMs. If the VM is active and the NVIDIA vGPU software is running, then this counts as one CCU. A vGPU CCU is independent of the connection to the VM.

The following table lists the ordering part numbers and feature codes.

Table 7. NVIDIA vGPU Software

Part number	Feature code 7S02CTO1WW	Description
NVIDIA vApps		
7S020003WW	B1MP	NVIDIA vApps Perpetual License and SUMS 5Yr, 1 CCU
7S020004WW	B1MQ	NVIDIA vApps Subscription License 1 Year, 1 CCU
7S020005WW	B1MR	NVIDIA vApps Subscription License 3 Years, 1 CCU
7S02003DWW	S832	NVIDIA vApps Subscription License 4 Years, 1 CCU
7S02003EWW	S833	NVIDIA vApps Subscription License 5 Years, 1 CCU
NVIDIA vPC		
7S020009WW	B1MV	NVIDIA vPC Perpetual License and SUMS 5Yr, 1 CCU
7S02000AWW	B1MW	NVIDIA vPC Subscription License 1 Year, 1 CCU
7S02000BWW	B1MX	NVIDIA vPC Subscription License 3 Years, 1 CCU
7S02003FWW	S834	NVIDIA vPC Subscription License 4 Years, 1 CCU
7S02003GWW	S835	NVIDIA vPC Subscription License 5 Years, 1 CCU
NVIDIA RTX vWS		
7S02000FWW	B1N1	NVIDIA RTX vWS Perpetual License and SUMS 5Yr, 1 CCU
7S02000GWW	B1N2	NVIDIA RTX vWS Subscription License 1 Year, 1 CCU
7S02000HWW	B1N3	NVIDIA RTX vWS Subscription License 3 Years, 1 CCU
7S02000XWW	S6YJ	NVIDIA RTX vWS Subscription License 4 Years, 1 CCU
7S02000YWW	S6YK	NVIDIA RTX vWS Subscription License 5 Years, 1 CCU
7S02000LWW	B1N6	NVIDIA RTX vWS EDU Perpetual License and SUMS 5Yr, 1 CCU
7S02000MWW	B1N7	NVIDIA RTX vWS EDU Subscription License 1 Year, 1 CCU
7S02000NWW	B1N8	NVIDIA RTX vWS EDU Subscription License 3 Years, 1 CCU
7S02003BWW	S830	NVIDIA RTX vWS EDU Subscription License 4 Years, 1 CCU
7S02003CWW	S831	NVIDIA RTX vWS EDU Subscription License 5 Years, 1 CCU

NVIDIA AI Enterprise Software

Lenovo offers the NVIDIA AI Enterprise (NVAIE) cloud-native enterprise software. NVIDIA AI Enterprise is an end-to-end, cloud-native suite of AI and data analytics software, optimized, certified, and supported by NVIDIA to run on VMware vSphere and bare-metal with NVIDIA-Certified Systems™. It includes key enabling technologies from NVIDIA for rapid deployment, management, and scaling of AI workloads in the modern hybrid cloud.

NVIDIA AI Enterprise is licensed on a per-GPU basis. NVIDIA AI Enterprise products can be purchased as either a perpetual license with support services, or as an annual or multi-year subscription.

- The perpetual license provides the right to use the NVIDIA AI Enterprise software indefinitely, with no expiration. NVIDIA AI Enterprise with perpetual licenses must be purchased in conjunction with one-year, three-year, or five-year support services. A one-year support service is also available for renewals.
- The subscription offerings are an affordable option to allow IT departments to better manage the flexibility of license volumes. NVIDIA AI Enterprise software products with subscription includes support services for the duration of the software’s subscription license

The features of NVIDIA AI Enterprise Software are listed in the following table.

Table 8. Features of NVIDIA AI Enterprise Software (NVAIE)

Features	Supported in NVIDIA AI Enterprise
Per GPU Licensing	Yes
Compute Virtualization	Supported
Windows Guest OS Support	No support
Linux Guest OS Support	Supported
Maximum Displays	1
Maximum Resolution	4096 x 2160 (4K)
OpenGL and Vulkan	In-situ Graphics only
CUDA and OpenCL Support	Supported
ECC and Page Retirement	Supported
MIG GPU Support	Supported
Multi-vGPU	Supported
NVIDIA GPUDirect	Supported
Peer-to-Peer over NVLink	Supported
GPU Pass Through Support	Supported
Baremetal Support	Supported
AI and Data Science applications and Frameworks	Supported
Cloud Native ready	Supported

Note: Maximum 10 concurrent VMs per product license

The following table lists the ordering part numbers and feature codes.

Table 9. NVIDIA AI Enterprise Software (NVAIE)

Part number	Feature code	Description
AI Enterprise Perpetual License		
7S02001BWW	S6YY	NVIDIA AI Enterprise Perpetual License and Support per GPU, 5 Years
7S02001EWW	S6Z1	NVIDIA AI Enterprise Perpetual License and Support per GPU, EDU, 5 Years
AI Enterprise Subscription License		
7S02001FWW	S6Z2	NVIDIA AI Enterprise Subscription License and Support per GPU, 1 Year
7S02001GWW	S6Z3	NVIDIA AI Enterprise Subscription License and Support per GPU, 3 Years

Part number	Feature code 7S02CTO1WW	Description
7S02001HWW	S6Z4	NVIDIA AI Enterprise Subscription License and Support per GPU, 5 Years
7S02001JWW	S6Z5	NVIDIA AI Enterprise Subscription License and Support per GPU, EDU, 1 Year
7S02001KWW	S6Z6	NVIDIA AI Enterprise Subscription License and Support per GPU, EDU, 3 Years
7S02001LWW	S6Z7	NVIDIA AI Enterprise Subscription License and Support per GPU, EDU, 5 Years

Find more information in the [NVIDIA AI Enterprise Sizing Guide](#).

NVIDIA HPC Compiler Software

Table 10. NVIDIA HPC Compiler

Part number	Feature code 7S09CTO6WW	Description
HPC Compiler Support Services		
7S090014WW	S924	NVIDIA HPC Compiler Support Services, 1 Year
7S090015WW	S925	NVIDIA HPC Compiler Support Services, 3 Years
7S09002GWW	S9UQ	NVIDIA HPC Compiler Support Services, 5 Years
7S090016WW	S926	NVIDIA HPC Compiler Support Services, EDU, 1 Year
7S090017WW	S927	NVIDIA HPC Compiler Support Services, EDU, 3 Years
7S09002HWW	S9UR	NVIDIA HPC Compiler Support Services, EDU, 5 Years
7S090018WW	S928	NVIDIA HPC Compiler Support Services - Additional Contact, 1 Year
7S09002JWW	S9US	NVIDIA HPC Compiler Support Services - Additional Contact, 3 Years
7S09002KWW	S9UT	NVIDIA HPC Compiler Support Services - Additional Contact, 5 Years
7S090019WW	S929	NVIDIA HPC Compiler Support Services - Additional Contact, EDU, 1 Year
7S09002LWW	S9UU	NVIDIA HPC Compiler Support Services - Additional Contact, EDU, 3 Years
7S09002MWW	S9UV	NVIDIA HPC Compiler Support Services - Additional Contact, EDU, 5 Years
HPC Compiler Premier Support Services		
7S09001AWW	S92A	NVIDIA HPC Compiler Premier Support Services, 1 Year
7S09002NWW	S9UW	NVIDIA HPC Compiler Premier Support Services, 3 Years
7S09002PWW	S9UX	NVIDIA HPC Compiler Premier Support Services, 5 Years
7S09001BWW	S92B	NVIDIA HPC Compiler Premier Support Services, EDU, 1 Year
7S09002QWW	S9UY	NVIDIA HPC Compiler Premier Support Services, EDU, 3 Years
7S09002RWW	S9UZ	NVIDIA HPC Compiler Premier Support Services, EDU, 5 Years
7S09001CWW	S92C	NVIDIA HPC Compiler Premier Support Services - Additional Contact, 1 Year
7S09002SWW	S9V0	NVIDIA HPC Compiler Premier Support Services - Additional Contact, 3 Years
7S09002TWW	S9V1	NVIDIA HPC Compiler Premier Support Services - Additional Contact, 5 Years
7S09001DWW	S92D	NVIDIA HPC Compiler Premier Support Services - Additional Contact, EDU, 1 Year
7S09002UWW	S9V2	NVIDIA HPC Compiler Premier Support Services - Additional Contact, EDU, 3 Years

Part number	Feature code	Description
7S09002VWW	S9V3	NVIDIA HPC Compiler Premier Support Services - Additional Contact, EDU, 5 Years

Auxiliary power cables

The RTX 6000 Ada GPU option part number does not ship with auxiliary power cables. Cables are server-specific due to length requirements. For CTO orders, auxiliary power cables are derived by the configurator. For field upgrades, cables will need to be ordered separately as listed in the table below.

Table 11. Auxiliary power cables for RTX 6000 Ada GPU

Auxiliary power cable needed with the SR650 V3	
<p>400mm 16-pin (2x6+4) cable Feature: BRWK SBB: SBB7A66338 Base: SC17B33047 FRU: 03KM846 Option: SR650 V3: 4X67A82883, ThinkSystem SR650 V3 GPU Full Length Thermal Option Kit*</p>	
<p>* The option part numbers are for thermal kits and include other components needed to install the GPU. See the server product guide for details.</p>	

Regulatory approvals

The RTX 6000 Ada GPU has the following regulatory approvals:

- RCM
- BSMI
- CE
- FCC
- ICES
- KCC
- cUL, UL
- VCCI

Operating environment

The RTX 6000 Ada GPU has the following operating characteristics:

- Ambient temperature
 - Operational: 0°C to 50°C (-5°C to 55°C for short term*)
 - Storage: -40°C to 75°C
- Relative humidity:
 - Operational: 5-85% (5-93% short term*)
 - Storage: 5-95%

* A period not more than 96 hours consecutive, not to exceed 15 days per year.

Warranty

One year limited warranty. When installed in a Lenovo server, the GPU assumes the server's base warranty and any warranty upgrades.

Related publications

For more information, refer to these documents:

- ThinkSystem and ThinkAgile GPU Summary:
<https://lenovopress.lenovo.com/lp0768-thinksystem-thinkagile-gpu-summary>
- ServerProven compatibility:
<https://serverproven.lenovo.com/>
- RTX 6000 Ada GPU product page:
<https://www.nvidia.com/en-us/design-visualization/rtx-6000/>

Related product families

Product families related to this document are the following:

- [GPU adapters](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, LP1940, was created or updated on April 23, 2024.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1940>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1940>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ServerProven®

ThinkAgile®

ThinkSystem®

The following terms are trademarks of other companies:

Intel® is a trademark of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, DirectX®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.