

ThinkSystem NVIDIA ConnectX-8 8180 800Gbs OSFP PCIe Gen6 x16 Adapter

Product Guide

The ThinkSystem NVIDIA ConnectX-8 8180 800Gbs OSFP PCIe Gen6 x16 Adapter is a high-performance SuperNIC network adapter with a single-cage OSFP interface. It supports one port of 800Gb XDR InfiniBand or two ports of 400 Gb Ethernet, providing best-in-class connectivity for AI computing.

The following figure shows the ThinkSystem NVIDIA ConnectX-8 8180 800Gbs OSFP PCIe Gen6 x16 Adapter (shown with the full-adapter gold case and internal heatsink removed)

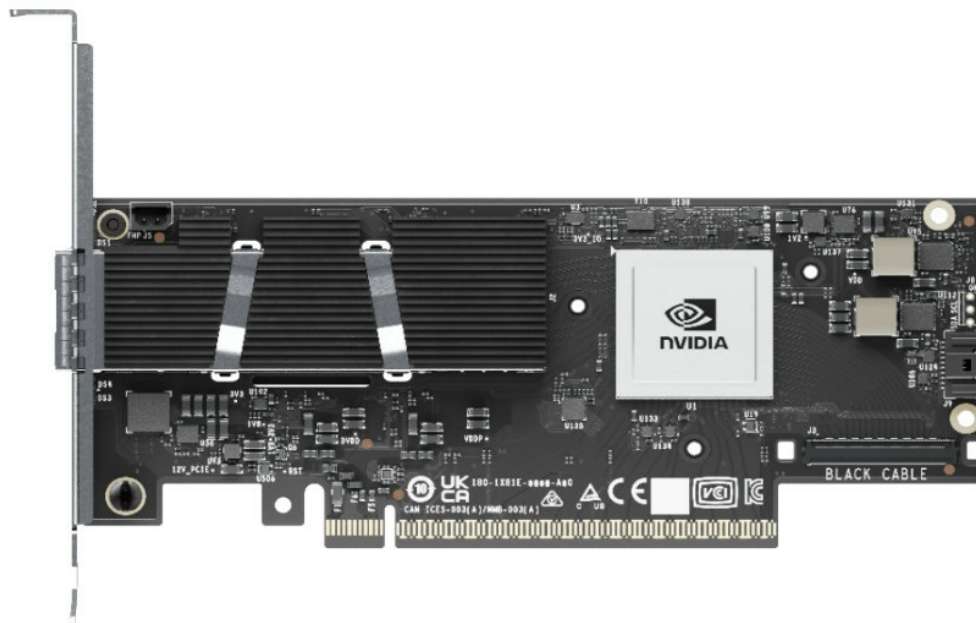


Figure 1. ThinkSystem NVIDIA ConnectX-8 8180 800Gbs OSFP PCIe Gen6 x16 Adapter (full-adapter gold case and heatsink removed)

Did you know?

The ConnectX-8 8180 adapter includes support for NVIDIA In-Network Computing acceleration engines to deliver the performance and robust feature set needed to power trillion-parameter-scale AI factories and scientific computing workloads.

Part number information

The following table shows the ordering information.

Table 1. Ordering information

Part number	Feature code	Description	NVIDIA equivalent
4XC7B03667	C9AP	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)	900-9X81E-00EX-ST0
CTO only	CAGC	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW)	-

The option part number includes the following:

- One NVIDIA adapter with full-height (3U) adapter bracket attached
- Low-profile (2U) adapter bracket
- Documentation

In PCIe Gen5 systems, the ConnectX-8 8180 adapter requires the use of an Auxiliary cable which plugs into a second PCIe x16 connection. The combination of the x16 host interface of the adapter plus the x16 connection of the Auxiliary cable results in a PCIe 5.0 x32 connection, needed for 800 Gb networking connectivity. Ordering information for the Auxiliary cable is listed in the following table.

Table 2. Auxiliary cable for ConnectX-8 adapters

Part number	Feature code	Description
4X97B05994	C8WC	ThinkSystem 1U/2U V4 NVIDIA ConnectX-8 Aux Cable Kit

Supported transceivers and cables

The ConnectX-8 8180 adapter has an empty OSFP cage for connectivity.

- [Support for air-cooled adapter](#)
- [Support for water-cooled adapter](#)

Support for air-cooled adapter

The ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW) supports specific cables.

No transceiver support: The air-cooled adapter does not currently support any transceivers. Use a DAC cable instead.

The following table lists the supported direct-attach copper (DAC) cables.

Table 3. Copper cables

Part number	Feature code	Description
NVIDIA NDRx2 OSFP800 Fanned to NDRx2 OSFP800 Flat Copper Cables		
4X97A84581	BRKC	Lenovo 1m NVIDIA NDRx2 OSFP800 Fanned to NDRx2 OSFP800 Flat Top Passive Copper Cable
4X97A84582	BRKD	Lenovo 1.5m NVIDIA NDRx2 OSFP800 Fanned to NDRx2 OSFP800 Flat Top Passive Copper Cable
4X97A84583	BRKE	Lenovo 2m NVIDIA NDRx2 OSFP800 Fanned to NDRx2 OSFP800 Flat Top Passive Copper Cable
4X97A84584	BRKF	Lenovo 3m NVIDIA NDRx2 OSFP800 Fanned to NDRx2 OSFP800 Flat Top Active Copper Cable
NVIDIA NDRx2 OSFP800 to 2x NDR OSFP400 Splitter Copper Cables		
4X97A81827	BQJV	Lenovo 1m NVIDIA NDRx2 OSFP800 to 2x NDR OSFP400 Passive Copper Splitter Cable
4X97A81828	BQJW	Lenovo 1.5m NVIDIA NDRx2 OSFP800 to 2x NDR OSFP400 Passive Copper Splitter Cable
4X97A81829	BQJX	Lenovo 2m NVIDIA NDRx2 OSFP800 to 2x NDR OSFP400 Passive Copper Splitter Cable
4X97A81830	BQJY	Lenovo 3m NVIDIA NDRx2 OSFP800 to 2x NDR OSFP400 Passive Copper Splitter Cable
NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter Cable		
4X97B05741	C98M	Lenovo 1m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)
4X97B05742	C98N	Lenovo 1.5m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)
4X97B05743	C98P	Lenovo 2m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)

Support for water-cooled adapter

The ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW) supports specific transceivers and cables.

Transceiver withdrawn: Transceiver C98R is currently withdrawn but is planned to be reactivated in 3Q/2025.

The following table lists the supported transceivers.

Table 4. Transceivers

Part number	Feature code	Description
800Gb Transceivers		
4TC7B05746	C98R	Lenovo NVIDIA XDR OSFP Single Mode Solo-Transceiver (Generic) (Withdrawn)

The following table lists the supported optical cables.

Table 5. Optical cables

Part number	Feature code	Description
NVIDIA XDR SM MPO12 APC Optical Cable		
4X97B05748	C98T	Lenovo 10M NVIDIA XDR SM MPO12 APC Optical Cable (Generic)
4X97B05750	C98U	Lenovo 15M NVIDIA XDR SM MPO12 APC Optical Cable (Generic)
4X97B05751	C98V	Lenovo 20M NVIDIA XDR SM MPO12 APC Optical Cable (Generic)
4X97B05752	C98W	Lenovo 30M NVIDIA XDR SM MPO12 APC Optical Cable (Generic)

The following table lists the supported direct-attach copper (DAC) cables.

Table 6. Copper cables

Part number	Feature code	Description
NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter Cable		
4X97B05741	C98M	Lenovo 1m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)
4X97B05742	C98N	Lenovo 1.5m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)
4X97B05743	C98P	Lenovo 2m NVIDIA XDR OSFP to 2xOSFP Active Copper Splitter cable (Generic)

Technical specifications

The adapter has the following technical specifications:

Implementation tip: By default, the ConnectX-8 C8180 adapter will attempt to establish a link using InfiniBand. If an Ethernet connection is required, the protocol must be changed on the adapter.

- Single OSFP cage
- InfiniBand Network Interface
 - Supports 200/100/50G PAM4
 - Speeds: 800Gb, 400Gb, 200Gb, 100Gb
 - Supports InfiniBand XDR/NDR/HDR/HDR100/EDR
 - IBTA v1.7-compliant
 - 16 million I/O channels
 - 256 to 4,000 byte MTU, 2GB messages
- Ethernet Network Interface
 - Supports 100/50G PAM4 and 25/10G NRZ
 - Speeds: 400Gb, 200Gb, 100Gb, 50Gb, 25Gb
 - Max bandwidth: 800Gb/s (2x 400Gb using a twin-transceiver or splitter cable)
 - Supports up to 8 split ports
- Protocol support
 - InfiniBand: IBTA v1.7; Auto-Negotiation: XDR (4 lanes x 200Gb/s per) port, NDR (4 lanes x 100Gb/s per lane) port, NDR200 (2 lanes x 100Gb/s per lane) port, HDR (50Gb/s per lane) port, HDR100 (2 lane x 50Gb/s per lane) port, EDR (25Gb/s per lane) port, FDR (14.0625Gb/s per lane), 1X/2X/4X SDR (2.5Gb/s per lane).
 - Ethernet: 400GAUI-4 C2M, 400GBASE-CR4, 200GAUI-2 C2M, 200GAUI-4 C2M, 200GBASE-CR4, 100GAUI-2 C2M, 100GAUI-1 C2M, 100GBASE-CR4, 100GBASE-CR2, 100GBASE-CR1, 50GAUI-2 C2M, 50GAUI-1 C2M, 50GBASE-CR, 50GBASE-R2 , 40GBASE-CR4, 40GBASE-R2, 25GBASE-R, 10GBASE-R, 10GBASE-CX4, 1000BASE-CX, CAUI-4 C2M, 25GAUI C2M, XLAUI C2M , XLPPI, SFI
- Host Interface
 - PCIe Gen6 x16 host interface via edge connector
 - Additional x16 interface via an MCIO connector on the adapter (requires Auxiliary cable)
 - NVIDIA Multi-Host (up to 4 hosts)
 - MSI/MSI-X
- Optimized Cloud Networking
 - Stateless TCP offloads: IP / TCP / UDP checksum, LSO, LRO, GRO, TSS, RSS
 - SR-IOV
 - Ethernet Accelerated Switching & Packet Processing (ASAP2) for SDN and VNF
 - OVS acceleration
 - Overlay network accelerations: VXLAN, GENEVE, NVGRE
 - Connection tracking (L4 firewall) and NAT
 - Hierarchical QoS, Header rewrite, Flow mirroring, Flow-based statistics, Flow aging
- Advanced AI / HPC Networking
 - RDMA and RoCEv2 accelerations
 - Advanced, programmable congestion control
 - NVIDIA GPUDirect RDMA
 - GPUDirect Storage
 - In-network computing
 - High-speed packet reordering
- MPI Accelerations
 - Burst-buffer offloads
 - Collective operations offloads

- Rendezvous protocol offloads
 - Enhanced atomic operations
- AI / HPC Software
 - NCCL HPC-X
 - DOCA UCC / UCX
 - OpenMPI
 - MVAPICH-2
- Platform security
 - Secure boot with hardware root of trust (RoT)
 - Secure firmware update
 - Flash encryption
 - Device attestation (SPDM 1.2)
- Cryptography
 - Inline crypto accelerations: IPsec, TLS, MACsec, PSP
- Management and Control
 - Network Control Sideband Interface (NC-SI)
 - MCTP over SMBus and PCIe PLDM for:
 - Monitor and Control DSP0248
 - Firmware Update DSP0267
 - Redfish Device Enablement DSP0218
 - Field-Replaceable Unit (FRU) DSP0257
 - Security Protocols and Data Models (SPDM) DSP0274
 - Serial Peripheral Interface (SPI) to flash
 - Joint Test Action Group (JTAG) IEEE 1149.1 and IEEE 1149.6
- Network Boot
 - InfiniBand or Ethernet
 - PXE boot
 - iSCSI boot
 - UEFI

NVIDIA Unified Fabric Manager

NVIDIA Unified Fabric Manager (UFM) is InfiniBand networking management software that combines enhanced, real-time network telemetry with fabric visibility and control to support scale-out InfiniBand data centers.

The two offerings available from Lenovo are as follows:

- UFM Telemetry** for Real-Time Monitoring
 The UFM Telemetry platform provides network validation tools to monitor network performance and conditions, capturing and streaming rich real-time network telemetry information, application workload usage, and system configuration to an on-premises or cloud-based database for further analysis.
- UFM Enterprise** for Fabric Visibility and Control
 The UFM Enterprise platform combines the benefits of UFM Telemetry with enhanced network monitoring and management. It performs automated network discovery and provisioning, traffic monitoring, and congestion discovery. It also enables job schedule provisioning and integrates with industry-leading job schedulers and cloud and cluster managers, including Slurm and Platform Load Sharing Facility (LSF).

The following table lists the subscription licenses available from Lenovo.

Table 7. NVIDIA Unified Fabric Manager subscriptions

Part number	Feature code (7S09CTO6WW)	NVIDIA part number	Description
UFM Telemetry			
7S090011WW	S921	797-YUFTMA+P3CMI12	NVIDIA UFM Telemetry 1-year License and 24/7 Support for Lenovo clusters
7S090012WW	S922	797-YUFTMA+P3CMI36	NVIDIA UFM Telemetry 3-year License and 24/7 Support for Lenovo clusters
7S090013WW	S923	797-YUFTMA+P3CMI60	NVIDIA UFM Telemetry 5-year License and 24/7 Support for Lenovo clusters
UFM Enterprise			
7S09000XWW	S91Y	797-YUFETA+P3CMI12	NVIDIA UFM Enterprise 1-year License and 24/7 Support for Lenovo clusters
7S09000YWW	S91Z	797-YUFETA+P3CMI36	NVIDIA UFM Enterprise 3-year License and 24/7 Support for Lenovo clusters
7S09000ZWW	S920	797-YUFETA+P3CMI60	NVIDIA UFM Enterprise 5-year License and 24/7 Support for Lenovo clusters

For more information, see the following web page:
<https://www.nvidia.com/en-us/networking/infiniband/ufm/>

Server support

The following tables list the ThinkSystem servers that are compatible.

Table 8. Server support (Part 1 of 4)

Part Number	Description	AMD V3				2S Intel V3/V4				4S 8S Intel V3		Multi Node V3/V4		1S V3							
		SR635 V3 (7D9H / 7D9G)	SR655 V3 (7D9F / 7D9E)	SR645 V3 (7D9D / 7D9C)	SR665 V3 (7D9B / 7D9A)	ST650 V3 (7D7B / 7D7A)	SR630 V3 (7D72 / 7D73)	SR650 V3 (7D75 / 7D76)	SR630 V4 (7DG8 / 7DG9)	SR650 V4 (7DGC / 7DGD)	SR650a V4 (7DGC / 7DGD)	SR850 V3 (7D97 / 7D96)	SR860 V3 (7D94 / 7D93)	SR950 V3 (7DC5 / 7DC4)	SD535 V3 (7DD8 / 7DD1)	SD530 V3 (7DDA / 7DD3)	SD550 V3 (7DD9 / 7DD2)	ST45 V3 (7DH4 / 7DH5)	ST50 V3 (7DF4 / 7DF3)	ST250 V3 (7DCF / 7DCE)	SR250 V3 (7DCM / 7DCL)
4XC7B03667	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)	N	N	N	N	N	N	N	Y	Y	Y	N	N	N	N	N	N	N	N	N	N
CAGC	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Table 9. Server support (Part 2 of 4)

Part Number	Description	GPU Rich				Edge				Super Computing									
		SR670 V2 (7Z22 / 7Z23)	SR675 V3 (7D9Q / 7D9R)	SR680a V3 (7DHE)	SR685a V3 (7DHC)	SR780a V3 (7DJ5)	SE100 (7DGR)	SE350 (7Z46 / 7D1X)	SE350 V2 (7DA9)	SE360 V2 (7DAM)	SE450 (7D8T)	SE455 V3 (7DBY)	SC750 V4 (7DDJ)	SC777 V4 (7DKA)	SD665 V3 (7D9P)	SD665-N V3 (7DAZ)	SD650 V3 (7D7M)	SD650-I V3 (7D7L)	SD650-N V3 (7D7N)
4XC7B03667	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
CAGC	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	Y	N	N	N	N	N	N

Table 10. Server support (Part 3 of 4)

Part Number	Description	1S Intel V2		2S Intel V2		AMD V1				Dense V2			4S V2	8S					
		ST50 V2 (7D8K / 7D8J)	ST250 V2 (7D8G / 7D8F)	SR250 V2 (7D7R / 7D7Q)	ST650 V2 (7Z75 / 7Z74)	SR630 V2 (7Z70 / 7Z71)	SR650 V2 (7Z72 / 7Z73)	SR635 (7Y98 / 7Y99)	SR655 (7Y00 / 7Z01)	SR655 Client OS	SR645 (7D2Y / 7D2X)	SR665 (7D2W / 7D2V)	SD630 V2 (7D1K)	SD650 V2 (7D1M)	SD650-N V2 (7D1N)	SN550 V2 (7Z69)	SR850 V2 (7D31 / 7D32)	SR860 V2 (7Z59 / 7Z60)	SR950 (7X11 / 7X12)
4XC7B03667	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
CAGC	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Table 11. Server support (Part 4 of 4)

Part Number	Description	4S V1			1S Intel V1			2S Intel V1							Dense V1					
		SR850 (7X18 / 7X19)	SR850P (7D2F / 2D2G)	SR860 (7X69 / 7X70)	ST50 (7Y48 / 7Y50)	ST250 (7Y45 / 7Y46)	SR150 (7Y54)	SR250 (7Y52 / 7Y51)	ST550 (7X09 / 7X10)	SR530 (7X07 / 7X08)	SR550 (7X03 / 7X04)	SR570 (7Y02 / 7Y03)	SR590 (7X98 / 7X99)	SR630 (7X01 / 7X02)	SR650 (7X05 / 7X06)	SR670 (7Y36 / 7Y37)	SD530 (7X21)	SD650 (7X58)	SN550 (7X16)	SN850 (7X15)
4XC7B03667	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-port PCIe Gen6 x16 (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
CAGC	ThinkSystem NVIDIA ConnectX-8 8180 800Gbs XDR IB / 2x400GbE OSFP 1-Port PCIe Gen6 x16 DWC (Generic FW)	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N

Support of adapters with generic firmware

One or more of the adapters described in this product guide uses standard vendor firmware (look for "Generic FW" or "Generic" in the adapter names). These adapters are supported in Lenovo servers however there are currently limitations on the use of Lenovo management tools.

Support in Lenovo XClarity management tools for adapters with generic firmware is per the following table.

Tip: Always use firmware that is obtained from Lenovo sources to ensure the firmware is fully tested by Lenovo and is supported. You should not use firmware that is obtained from the vendor web site, unless directed to do so by Lenovo support.

Table 12. Lenovo XClarity management tools support for adapters with generic firmware

Function	Lenovo XClarity Provisioning Manager	Lenovo XClarity OneCLI (out-of-band)	Lenovo XClarity OneCLI (in-band)	Lenovo XClarity Administrator
Adapter configuration	Supported (in-band via UEFI)	Planned for support 3Q/2025	Planned for support 3Q/2025	Planned for support 3Q/2025

Regulatory approvals

The adapter has the following regulatory approvals:

- Safety: CB / cTUVus / CE
- EMC: CE / FCC / VCCI / ICES / RCM / KC
- RoHS: RoHS Compliant

Operating environment

The adapter has the following operating characteristics:

- Maximum power available through OSFP port: 17W
- Temperature
 - Operational: 0°C to 55°C
 - Non-operational: -40°C to 70°C
- Humidity: 90% relative humidity

Warranty

One year limited warranty. When installed in a Lenovo server, the adapter assumes the server's base warranty and any warranty upgrades.

Related publications

For more information, refer to these documents:

- ThinkSystem Ethernet and InfiniBand Adapter Reference
<https://lenovopress.lenovo.com/lp1594-thinksystem-ethernet-infiniband-adapter-reference>
- Lenovo ServerProven compatibility information
<http://serverproven.lenovo.com>
- NVIDIA InfiniBand product page:
<https://www.nvidia.com/en-us/networking/infiniband-adapters/>
- ConnectX-8 SuperNIC user manual:
<https://docs.nvidia.com/networking/display/connectx8supernic>

Related product families

Product families related to this document are the following:

- [InfiniBand & Omni-Path Adapters](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2025. All rights reserved.

This document, LP2163, was created or updated on April 22, 2025.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP2163>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP2163>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ServerProven®

ThinkSystem®

XClarity®

The following terms are trademarks of other companies:

AMD is a trademark of Advanced Micro Devices, Inc.

Intel® is a trademark of Intel Corporation or its subsidiaries.

LSF® is a trademark of IBM in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.