

Lenovo ThinkAgile HX3521-G Certified Node (Xeon SP Gen 1)

Product Guide (withdrawn product)

Lenovo ThinkAgile HX Certified Nodes are designed for deploying industry-leading hyperconvergence software from Nutanix on Lenovo enterprise platforms that feature the first generation of the Intel Xeon Processor Scalable Family (Xeon SP Gen 1).

The ThinkAgile HX Certified Nodes deliver fully validated and integrated Lenovo hardware and firmware, certified and preloaded with Nutanix software. Nutanix brings the benefits of web-scale technologies to enterprise applications through enterprise storage, data protection, infrastructure resilience, management and analytics, and security.

The ThinkAgile HX3521-G is a 2U rack-mount certified node for compute-heavy workloads that supports two processors, up to 1.5 TB of 2666 MHz TruDDR4 memory, 16x SAS/SATA SFF hot-swap drive bays with an extensive choice of SAS/SATA SSDs and HDDs, flexible network connectivity options with 1/10 GbE RJ-45, 10 GbE SFP+, and 10/25 GbE SFP28 ports, and up to two GPU adapters.

Several common uses for the ThinkAgile HX Certified Nodes for compute-heavy workloads include virtual desktop infrastructure (VDI), server virtualization, private/hybrid clouds, enterprise applications, light databases, and remote office and branch office workloads.

The ThinkAgile HX3521-G Certified Node is shown in the following figure.

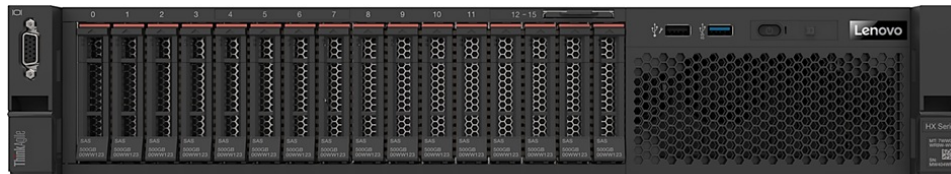


Figure 1. Lenovo ThinkAgile HX3521-G Certified Node

Did you know?

The ThinkAgile HX Certified Nodes are built on industry-leading Lenovo ThinkSystem servers that feature enterprise-class reliability, management, and security.

The ThinkAgile HX Certified Nodes deliver fully validated and integrated hardware and firmware that is certified with Nutanix software.

Key features

The ThinkAgile HX Certified Nodes are designed for the industry's most feature-rich hyperconverged infrastructure from Nutanix. Nutanix brings the benefits of web-scale technologies to enterprise applications through enterprise storage, data protection, infrastructure resilience, management and analytics, and security.

The ThinkAgile HX Certified Nodes offer the following key features:

- Built on proven and reliable Lenovo ThinkSystem servers featuring Intel Xeon Processor Scalable Family that provide compute power for a variety of workloads and applications.
- Deliver fully validated and integrated hardware and firmware that is certified with Nutanix software.
- Preloaded with Nutanix software and ready for out-of-box deployment (software licenses are not included).
- Provide flexibility in using the existing Nutanix term-based software licenses and active support contracts or purchasing new software licenses and support contracts from Nutanix.
- Offer optional Lenovo Professional Services to get customers up and running quickly.

The Nutanix software running on the HX Certified Nodes deliver the following key features:

- A natively integrated solution for data protection and continuous availability at VM granularity that gives administrators an affordable range of options to meet the recovery point objectives (RPO) and recovery time objectives (RTO) for different applications.
- A fault resistant platform, with no single point of failure and no bottlenecks with shared-nothing architecture, where all data, metadata and services are distributed to all nodes within the cluster, that is built to detect, isolate and recover from failures anywhere in the system.
- An intuitive user-centric management experience to simplify every aspect of the IT infrastructure lifecycle and provide a single pane of glass to monitor and control Nutanix clusters, with simplified workflows and rich automation for common administrative tasks.
- Powerful security features, such as two-factor authentication and data-at-rest encryption, with a security development lifecycle that is integrated into product development to help customers meet the most stringent security requirements.

Components and connectors

The following figure shows the front view of the HX3521-G Certified Node.

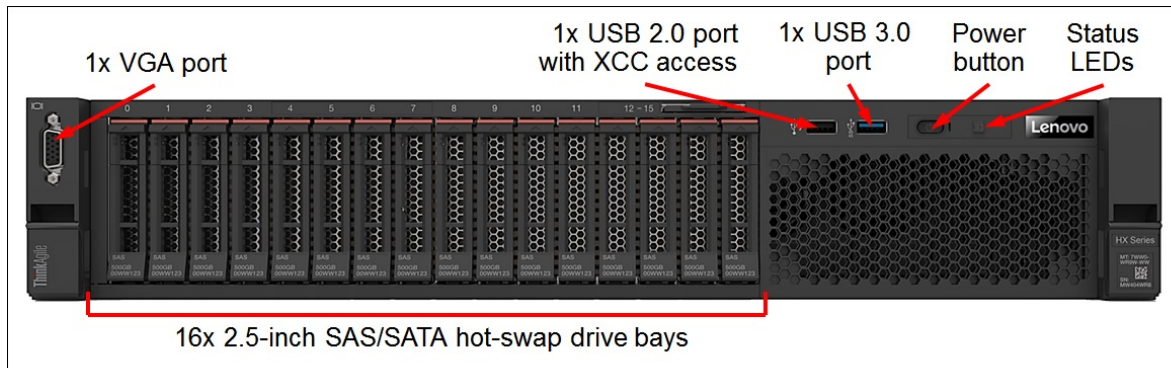


Figure 2. HX3521-G front view

The front of the HX3521-G Certified Node includes the following components:

- 16x SFF SAS/SATA hot-swap drive bays
- One VGA port
- One USB 2.0 port with XClarity Controller access
- One USB 3.0 port
- A Power button
- Status LEDs

The following figure shows the rear view of the HX3521-G Certified Node.

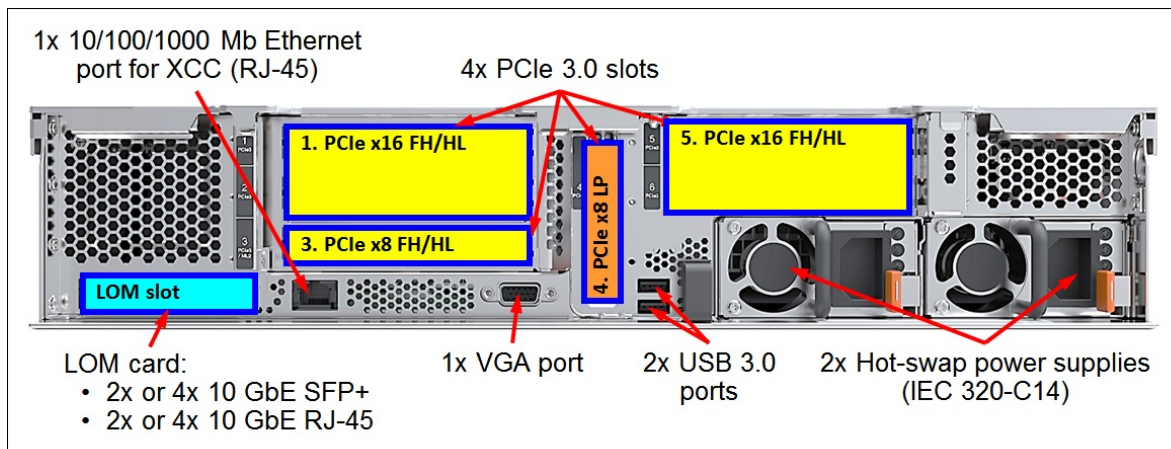


Figure 3. HX3521-G rear view

The rear of the HX3521-G Certified Node includes the following components:

- Four PCIe expansion slots
- One LOM card slot
- One 1 GbE port for XClarity Controller
- One VGA port
- Two USB 3.0 ports
- Two hot-swap power supplies

System specifications

The following table lists the system specifications of the ThinkAgile HX3521-G Certified Node.

Table 1. HX3521-G system specifications

| Attribute | Specification |
|---------------------|--|
| Form factor | 2U Rack-mount. |
| Processor | Two Intel Xeon Silver, Gold, or Platinum Gen 1 processors. |
| Chipset | Intel C624. |
| Memory | 24 DIMM slots for TruDDR4 2666 MHz memory. Support for 16 GB or 32 GB RDIMMs, 64 GB LRDIMMs, or 128 GB 3DS RDIMMs. |
| Memory capacity | Up to 1.5 TB. |
| Memory protection | Error correction code (ECC), Single Device Data Correction (SDDC; for x4-based memory DIMMs), Adaptive Double Device Data Correction (ADDDC; for x4-based memory DIMMs, requires Intel Xeon Gold or Platinum processors), patrol scrubbing, and demand scrubbing. |
| Drive bays | 16x 2.5-inch SAS/SATA hot-swap. |
| Internal storage | <ul style="list-style-type: none"> ● Hybrid: <ul style="list-style-type: none"> ○ 2 cache SSDs and from 6 to 14 capacity HDDs in increments of 2 drives. ○ 4 cache SSDs and from 8 to 12 capacity HDDs in increments of 2 drives. ● All Flash: From 4 to 16 SSDs in increments of 2 drives. |
| Drive capacities | <ul style="list-style-type: none"> ● SSDs: <ul style="list-style-type: none"> ○ 12 Gbps SAS SSDs up to 3.84 TB. ○ 6 Gbps SATA SSDs up to 3.84 TB. ● HDDs: <ul style="list-style-type: none"> ○ 12 Gbps SAS HDDs up to 2.4 TB. ○ 6 Gbps NL SATA HDDs up to 2 TB. <p>Note: All SSDs in the certified node must be of the same model and capacity. All HDDs in the certified node must be of the same type and capacity.</p> |
| Storage capacity | <ul style="list-style-type: none"> ● Hybrid: Up to 33.6 TB (HDDs). ● All Flash: Up to 61.44 TB (SSDs). |
| Storage controller | 1x 430-16i HBA (12 Gbps SAS/6 Gbps SATA). |
| Network interfaces | <ul style="list-style-type: none"> ● 2x or 4x base 1/10 GbE RJ-45 or 10 GbE SFP+ network ports. ● 2x, 4x, or 6x optional 1/10 GbE RJ-45, 10 GbE SFP+, or 25 GbE SFP28 expansion ports. ● 1x RJ-45 10/100/1000 Mb Ethernet port for systems management. |
| GPU adapters | Up to two NVIDIA Tesla M10 or M60 passive PCIe GPU adapters. |
| Boot drive | 2x M.2 non-hot-swap SSDs up to 480 GB (RAID-1). |
| I/O expansion slots | 6x PCIe 3.0 slots: <ul style="list-style-type: none"> ● Slot 1: PCIe 3.0 x16; full-height, half-length (for a GPU adapter) ● Slot 3: PCIe 3.0 x8; full-height, half-length (for a network adapter) ● Slot 4: PCIe 3.0 x8; low profile (for a network adapter) ● Slot 5: PCIe 3.0 x16; full-height, half-length (for a GPU adapter or network adapter) ● Slot 7: PCIe 3.0 x8 (for an internal storage controller) |
| Ports | <ul style="list-style-type: none"> ● Front: 1x USB 2.0 port with XClarity Controller access, 1x USB 3.0 port, 1x VGA port. ● Rear: 2x USB 3.0 ports, 1x VGA port. |
| Cooling | Six hot-swap system fans with N+1 redundancy. |
| Power supply | Two redundant hot-swap 1600 W (200 - 240 V) High Efficiency Platinum power supplies. |
| Video | Matrox G200 with 16 MB memory integrated into the XClarity Controller. Maximum resolution is 1920x1200 at 60 Hz with 32 bits per pixel. |

| Attribute | Specification |
|----------------------|--|
| Hot-swap parts | SSDs and HDDs, power supplies, and fans. |
| Systems management | XClarity Controller (XCC) Enterprise (Pilot 4 chip), proactive platform alerts, light path diagnostics, XClarity Provisioning Manager, XClarity Administrator and XClarity Pro. XClarity Energy Manager (optional). |
| Security features | Power-on password, administrator's password, secure firmware updates, Trusted Platform Module (TPM) 1.2 or 2.0 (configurable UEFI setting). Optional security bezel. |
| Software | Nutanix Acropolis Pro and Ultimate editions (licenses purchased separately from Nutanix). |
| Hypervisors | <ul style="list-style-type: none"> ● Nutanix Acropolis Hypervisor (Bundled with AOS). ● VMware ESXi 6.0 Update 3. ● VMware ESXi 6.5 Update 1. ● VMware ESXi 6.5 Update 2. ● VMware ESXi 6.7 Update 1. ● VMware ESXi 6.7 Update 3. ● Microsoft Windows Server 2016 Datacenter (Hyper-V). |
| Warranty and support | One- (PRC only), three-, four-, or five-year customer-replaceable unit and onsite limited warranty with selectable service levels: 9x5 coverage with next business day (NBD) parts delivered (base warranty), 9x5 coverage with NBD onsite response (Foundation Service), 24x7 coverage with 4-hour onsite response or 24-hour committed repair (select areas) (Essential Service), or 24x7 coverage with 2-hour onsite response or 6-hour committed repair (select areas) (Advanced Service). Also available are 1-year and 2-year post-warranty extensions, YourDrive YourData, and Enterprise Software Support. |
| Dimensions | Height: 87 mm (3.4 in.), width: 445 mm (17.5 in.), depth: 720 mm (28.3 in.) |
| Weight | Maximum configuration: 32 kg (70.5 lb) |

Factory-integrated models

Product availability: The ThinkAgile HX3521-G Certified Nodes that use the first generation of the Intel Xeon Processor Scalable Family are withdrawn and no longer available for ordering. For currently available ThinkAgile HX3521-G Certified Nodes that use the second generation of the Intel Xeon Processor Scalable Family, refer to the Lenovo ThinkAgile HX3521-G Certified Node (Xeon SP Gen 2) product guide:

<http://lenovopress.com/lp1130>

Factory-integrated models of the ThinkAgile HX Certified Nodes are configured by using the Lenovo Data Center Solution Configurator (DCSC):

<http://dcsc.lenovo.com>

During the configuration process, you are selecting one of the base Configure-to-Order (CTO) models first, and then you are adding components (processors, memory, drives, and network adapters) to the selected model according to the output from the Nutanix Sizer tool:

<http://services.nutanix.com/>

The following table lists the base CTO models of the ThinkAgile HX3521-G Certified Node.

Table 2. Base CTO models

| Description | Machine Type/Model |
|---|--------------------|
| Models with 3-year warranty (Worldwide) | |
| Lenovo ThinkAgile HX3521-G Certified Node 3YR | 7Y90CTO3WW |
| Models with 1-year warranty (PRC only) | |
| Lenovo ThinkAgile HX3521-G Certified Node 1YR | 7Z05CTO3WW |

The following table lists the base chassis for the HX3521-G Certified Node.

Table 3. Base chassis

| Description | Feature code |
|--------------------------|--------------|
| ThinkAgile HX352x-G Base | B0T6 |

The HX3521-G Certified Nodes ship with the following items:

- *Electronic Publications Flyer*
- Tool-less Slide Rail Kit with or without 2U CMA (depending on the rack installation option selected)
- With or without two rack power cables or line cords (depending on the power cable option selection)

Memory

The ThinkAgile HX3521-G Certified Nodes support Lenovo TruDDR4 memory. TruDDR4 memory uses the highest-quality components sourced from Tier 1 DRAM suppliers and only memory that meets strict requirements is selected. It is compatibility tested and tuned to maximize performance and reliability.

The HX3521-G supports up to 24 DIMMs. Each processor has six memory channels, and there are two DIMMs per channel.

The following rules apply when selecting the memory configuration:

- The certified node supports RDIMMs, LRDIMMs, or 3DS RDIMMs.
- All DIMMs in the certified node must be of the same type (RDIMMs, LRDIMMs, or 3DS RDIMMs).
- All DIMMs in the certified node operate at the same speed up to 2666 MHz, which is determined by the maximum memory speed supported by the specific processor.
Note: Maximum memory speed can be achieved when Max performance mode is enabled in UEFI.
- The following maximum memory capacities are supported by the certified node:
 - RDIMMs: 768 GB.
 - LRDIMMs: 1.5 TB.
 - 3DS RDIMMs: 1.5 TB.

The following memory protection technologies are supported:

- ECC
- SDDC (for x4-based memory DIMMs)
- ADDDC (for x4-based memory DIMMs; Gold and Platinum processors only)
- Patrol scrubbing
- Demand scrubbing

Single Device Data Correction (SDDC) works only in the independent channel mode (the default operational mode) and supports only x4-based memory DIMMs.

Adaptive Double Device Data Correction (ADDDC) works with x4-based memory DIMMs and requires two DIMM ranks per channel, Intel Xeon Gold or Platinum processors, and the Closed Page memory access mode.

The following table lists the memory options that are available for selection.

Table 4. Memory selection options

| Description | Part number | Feature code | Quantity | | | | | | | | |
|--|-------------|--------------|----------|--------|---------|--------|---------|--------|--------|-------|--------|
| | | | 128 GB* | 192 GB | 256 GB* | 384 GB | 512 GB* | 576 GB | 768 GB | 1 TB* | 1.5 TB |
| ThinkSystem 2666 MHz RDIMMs | | | | | | | | | | | |
| 16GB TruDDR4 2666 MHz (2Rx8 1.2V) RDIMM | 7X77A01303 | AUNC | 8 | 12 | - | - | - | 12 | - | - | - |
| 32GB TruDDR4 2666 MHz (2Rx4 1.2V) RDIMM | 7X77A01304 | AUND | - | - | 8 | 12 | 16 | 12 | 24 | - | - |
| ThinkSystem 2666 MHz LRDIMMs | | | | | | | | | | | |
| 64GB TruDDR4 2666 MHz (4Rx4 1.2V) LRDIMM | 7X77A01305 | AUNE | - | - | - | - | 8 | - | 12 | 16 | 24 |
| ThinkSystem 2666 MHz 3DS RDIMMs | | | | | | | | | | | |
| 128GB TruDDR4 2666 MHz (8Rx4 1.2V) 3DS RDIMM | 7X77A01307 | AUNF | - | - | - | - | - | - | - | - | 12 |

* System performance might be impacted due to unbalanced memory configuration.

Internal storage

The ThinkAgile HX3521-G Certified Node provides 16x SAS/SATA SFF hot-swap drive bays for configurable storage capacity, and it contains two internal M.2 SATA non-hot-swap SSDs configured in a RAID-1 drive group for software preload.

The following table lists the internal storage options for the HX3521-G Certified Node.

Table 5. Internal storage options

| Description | Feature code | Quantity |
|---|--------------|----------|
| Backplanes | | |
| ThinkSystem SR550/SR650 2.5" SATA/SAS 8-Bay Backplane | AURA | 2 |
| M.2 enablement kit | | |
| ThinkSystem M.2 with Mirroring Enablement Kit | AUMV | 1 |

Configuration notes:

- Two SAS/SATA backplanes and one M.2 with Mirroring Enablement Kit are derived by the configurator.
- The M.2 with Mirroring Enablement Kit is connected to the Intel PCH via the PCIe link, and the kit supports two M.2 SATA SSDs configured in a RAID-1 drive group for software preload.

The following table lists M.2 drive selection options for software preload.

Table 6. Drive options for software preload

| Description | Feature code | Quantity |
|--|--------------|----------|
| ThinkSystem M.2 128GB SATA 6Gbps Non-Hot-Swap SSD | AUUV | 2 |
| ThinkSystem M.2 5100 240GB SATA 6Gbps Non-Hot Swap SSD | B5S4 | 2 |
| ThinkSystem M.2 5300 240GB SATA 6Gbps Non-Hot Swap SSD | B8HS | 2 |
| ThinkSystem M.2 5100 480GB SATA 6Gbps Non-Hot Swap SSD | B11V | 2 |
| ThinkSystem M.2 5300 480GB SATA 6Gbps Non-Hot Swap SSD | B919 | 2 |

Configuration note: Two M.2 SATA SSDs are required for selection, and they must be of the same model and capacity.

The following table lists the storage controllers for internal storage of the HX3521-G Certified Node.

Table 7. Controllers for internal storage

| Description | Feature code | Quantity |
|--|--------------|----------|
| ThinkSystem 430-16i SAS/SATA 12Gb HBA (non-RAID) | AUNM | 1 |

Configuration note: A low profile SAS HBA for internal storage is derived by the configurator, and it occupies the PCIe slot 7.

Drives for internal storage

The following tables list the drive selection options.

Table 8. Drive selection options: Hybrid configurations

| Description | Part number | Feature code | Quantity (min / max) |
|--|-------------|--------------|----------------------|
| SSD selection (Cache tier): SAS 12Gb SSDs - PM1633a Capacity | | | |
| ThinkSystem 2.5" PM1633a 3.84TB Capacity SAS 12Gb Hot Swap SSD | 7N47A00121 | AUMK | 2 / 4 |
| SSD selection (Cache tier): SAS 12Gb SSDs - PM1635a Mainstream | | | |
| ThinkSystem 2.5" PM1635a 800GB Mainstream SAS 12Gb Hot Swap SSD | 7N47A00118 | AUMD | 2 / 4 |
| ThinkSystem 2.5" PM1635a 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 7N47A00119 | AVRG | 2 / 4 |
| SSD selection (Cache tier): SAS 12Gb SSDs - PM1645 Mainstream | | | |
| ThinkSystem 2.5" PM1645 800GB Mainstream SAS 12Gb Hot Swap SSD | 4XB7A13653 | B4A0 | 2 / 4 |
| ThinkSystem 2.5" PM1645 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 4XB7A13654 | B4A1 | 2 / 4 |
| SSD selection (Cache tier): SATA 6Gb SSDs - S4600 Mainstream | | | |
| ThinkSystem 2.5" Intel S4600 480GB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05722 | B0ZQ | 2 / 4 |
| ThinkSystem 2.5" Intel S4600 960GB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05721 | B0ZR | 2 / 4 |
| ThinkSystem 2.5" Intel S4600 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05720 | B0ZS | 2 / 4 |
| SSD selection (Cache tier): SATA 6Gb SSDs - S4610 Mainstream | | | |
| ThinkSystem 2.5" Intel S4610 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13634 | B49M | 2 / 4 |
| ThinkSystem 2.5" Intel S4610 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13635 | B49N | 2 / 4 |
| ThinkSystem 2.5" Intel S4610 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13636 | B49P | 2 / 4 |
| SSD selection (Cache tier): SATA 6Gb SSDs - PM883 Entry | | | |
| ThinkSystem 2.5" PM883 3.84TB Entry SATA 6Gb Hot Swap SSD | 4XB7A10199 | B34M | 2 / 4 |
| SSD selection (Cache tier): SATA 6Gb SSDs - S4510 Entry | | | |
| ThinkSystem 2.5" Intel S4510 3.84TB Entry SATA 6Gb Hot Swap SSD | 4XB7A13623 | B49C | 2 / 4 |
| HDD selection (Capacity tier): SAS 12Gb HDDs | | | |
| ThinkSystem 2.5" 2.4TB 10K SAS 12Gb Hot Swap 512e HDD | 7XB7A00069 | B0YS | 6 / 14 |
| HDD selection (Capacity tier): SATA 6Gb HDDs | | | |
| ThinkSystem 2.5" 1TB 7.2K SATA 6Gb Hot Swap 512n HDD | 7XB7A00036 | AUUE | 6 / 14 |
| ThinkSystem 2.5" 2TB 7.2K SATA 6Gb Hot Swap 512e HDD | 7XB7A00037 | AUJJ | 6 / 14 |

Table 9. Drive selection options: All Flash configurations

| Description | Part number | Feature code | Quantity (min / max) |
|--|-------------|--------------|----------------------|
| SAS 12Gb SSDs - PM1633a Capacity | | | |
| ThinkSystem 2.5" PM1633a 3.84TB Capacity SAS 12Gb Hot Swap SSD | 7N47A00121 | AUMK | 4 / 16 |
| SAS 12Gb SSDs - PM1635a Mainstream | | | |
| ThinkSystem 2.5" PM1635a 800GB Mainstream SAS 12Gb Hot Swap SSD | 7N47A00118 | AUMD | 4 / 16 |
| ThinkSystem 2.5" PM1635a 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 7N47A00119 | AVRG | 4 / 16 |
| SAS 12Gb SSDs - PM1645 Mainstream | | | |
| ThinkSystem 2.5" PM1645 800GB Mainstream SAS 12Gb Hot Swap SSD | 4XB7A13653 | B4A0 | 4 / 16 |
| ThinkSystem 2.5" PM1645 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 4XB7A13654 | B4A1 | 4 / 16 |
| SATA 6Gb SSDs - S4600 Mainstream | | | |
| ThinkSystem 2.5" Intel S4600 480GB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05722 | B0ZQ | 4 / 16 |
| ThinkSystem 2.5" Intel S4600 960GB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05721 | B0ZR | 4 / 16 |
| ThinkSystem 2.5" Intel S4600 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05720 | B0ZS | 4 / 16 |
| SATA 6Gb SSDs - S4610 Mainstream | | | |
| ThinkSystem 2.5" Intel S4610 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13634 | B49M | 4 / 16 |
| ThinkSystem 2.5" Intel S4610 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13635 | B49N | 4 / 16 |
| ThinkSystem 2.5" Intel S4610 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A13636 | B49P | 4 / 16 |
| SATA 6Gb SSDs - 5100 Mainstream | | | |
| ThinkSystem 2.5" 5100 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 7SD7A05762 | B10Z | 4 / 16 |
| SATA 6Gb SSDs - 5200 Mainstream | | | |
| ThinkSystem 2.5" 5200 480GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10238 | B489 | 4 / 16 |
| ThinkSystem 2.5" 5200 960GB Mainstream SATA 6Gb Hot Swap SSD | 4XB7A10239 | B48A | 4 / 16 |
| SATA 6Gb SSDs - PM883 Entry | | | |
| ThinkSystem 2.5" PM883 3.84TB Entry SATA 6Gb Hot Swap SSD | 4XB7A10199 | B34M | 4 / 16 |
| SATA 6Gb SSDs - S4510 Entry | | | |
| ThinkSystem 2.5" Intel S4510 3.84TB Entry SATA 6Gb Hot Swap SSD | 4XB7A13623 | B49C | 4 / 16 |

Configuration notes:

- For hybrid configurations, the HX3521-G Certified Node supports from 6 to 14 capacity drives (HDDs) depending on the quantity of the cache drives (SSDs):
 - 2 cache drives: From 6 to 14 capacity drives in increments of 2 drives.
 - 4 cache drives: From 8 to 12 capacity drives in increments of 2 drives.
- For All Flash configurations, the HX3521-G Certified Node supports from 4 to 16 SSDs in increments of 2 drives.
- All SSDs in the certified node must be of the same model and capacity. All HDDs in the certified node must be of the same type and capacity.

Network connectivity

The HX3521-G Certified Nodes provide base two- or four-port 1/10 GbE RJ-45 or 10 GbE SFP+ network connectivity with the onboard Intel X722 NIC and a LOM card installed in the appliance. Two, four, or six additional 1/10 GbE RJ-45, 10 GbE SFP+, or 25 GbE SFP28 expansion ports can be selected, if required.

The following table lists the network adapter options that are available for selection.

Table 10. Network adapter selection options

| Description | Part number | Feature code | Quantity (min / max) |
|--|-------------|--------------|----------------------|
| 1/10 GbE RJ-45 base ports | | | |
| ThinkSystem 10Gb 2-port Base-T LOM (RJ-45) | 7ZT7A00548 | AUKL | 0 / 1 |
| ThinkSystem 10Gb 4-port Base-T LOM (RJ-45) | 7ZT7A00549 | AUKM | 0 / 1 |
| 1/10 GbE RJ-45 expansion ports | | | |
| Intel X550-T2 Dual Port 10GBase-T Adapter (RJ-45) | 00MM860 | ATPX | 0 / 3 |
| 10 GbE SFP+ base ports | | | |
| ThinkSystem 10Gb 2-port SFP+ LOM | 7ZT7A00546 | AUKJ | 0 / 1 |
| ThinkSystem 10Gb 4-port SFP+ LOM | 7ZT7A00547 | AUKK | 0 / 1 |
| 10 GbE SFP+ expansion ports | | | |
| Intel X710-DA2 PCIe 10Gb 2-Port SFP+ Ethernet Adapter | 7ZT7A00537 | AUKX | 0 / 3 |
| 10/25 GbE SFP28 expansion ports | | | |
| Mellanox ConnectX-4 Lx 10/25GbE SFP28 2-Port PCIe Ethernet Adapter | 01GR250 | AUAJ | 0 / 3 |

Configuration notes:

- One of the 1/10 GbE RJ-45 or 10 GbE SFP+ LOM cards is required for selection, and it provides base network connectivity. Optional expansion ports can be selected, if needed.
- Supported transceivers or DAC cables should be purchased for the SFP+ and SFP28 ports, and UTP Category 6 cables should be purchased for the 10 GbE RJ-45 ports. The maximum number of transceivers or cables that are supported per adapter equals the quantity of the adapter ports, and all adapter ports must have the same type of the transceiver or cable selected.
The following transceiver and cables can be purchased:
 - [UTP cables for 1/10 GbE RJ-45 ports](#)
 - [Transceivers and cables for 10 GbE SFP+ ports](#)
 - [Transceivers and cables for 25 GbE SFP28 ports](#)

The following table lists cables for the 1/10 GbE RJ-45 ports.

Table 11. Cables for 1/10 GbE RJ-45 ports

| Description | Part number | Feature code |
|--|-------------|--------------|
| UTP Category 6 cables (Green) for 1/10 GbE RJ-45 ports | | |
| 0.75m Cat6 Green Cable | 00WE123 | AVFW |
| 1.0m Cat6 Green Cable | 00WE127 | AVFX |
| 1.25m Cat6 Green Cable | 00WE131 | AVFY |
| 1.5m Cat6 Green Cable | 00WE135 | AVFZ |
| 3m Cat6 Green Cable | 00WE139 | AVG0 |
| 10m Cat6 Green Cable | 90Y3718 | A1MT |
| 25m Cat6 Green Cable | 90Y3727 | A1MW |

The following table lists transceivers and cables for the 10 GbE SFP+ ports.

Table 12. Transceivers and cables for 10 GbE SFP+ ports

| Description | Part number | Feature code |
|---|-------------|--------------|
| 10 GbE SFP+ SR transceivers for 10 GbE SFP+ ports | | |
| Lenovo 10GBASE-SR SFP+ Transceiver | 46C3447 | 5053 |
| Lenovo 10GBASE-LR SFP+ Transceiver | 00FE331 | B0RJ |
| Optical cables for 10 GbE SFP+ SR transceivers | | |
| Lenovo 0.5m LC-LC OM3 MMF Cable | 00MN499 | ASR5 |
| Lenovo 1m LC-LC OM3 MMF Cable | 00MN502 | ASR6 |
| Lenovo 3m LC-LC OM3 MMF Cable | 00MN505 | ASR7 |
| Lenovo 5m LC-LC OM3 MMF Cable | 00MN508 | ASR8 |
| Lenovo 10m LC-LC OM3 MMF Cable | 00MN511 | ASR9 |
| Lenovo 15m LC-LC OM3 MMF Cable | 00MN514 | ASRA |
| Lenovo 25m LC-LC OM3 MMF Cable | 00MN517 | ASRB |
| Passive SFP+ DAC cables for 10 GbE SFP+ ports | | |
| Lenovo 0.5m Passive SFP+ DAC Cable | 00D6288 | A3RG |
| Lenovo 1m Passive SFP+ DAC Cable | 90Y9427 | A1PH |
| Lenovo 1.5m Passive SFP+ DAC Cable | 00AY764 | A51N |
| Lenovo 2m Passive SFP+ DAC Cable | 00AY765 | A51P |
| Lenovo 3m Passive SFP+ DAC Cable | 90Y9430 | A1PJ |
| Lenovo 5m Passive SFP+ DAC Cable | 90Y9433 | A1PK |
| Lenovo 7m Passive SFP+ DAC Cable | 00D6151 | A3RH |
| Active SFP+ DAC cables for 10 GbE SFP+ ports | | |
| Lenovo 1m Active DAC SFP+ Cable | 00VX111 | AT2R |
| Lenovo 3m Active DAC SFP+ Cable | 00VX114 | AT2S |
| Lenovo 5m Active DAC SFP+ Cable | 00VX117 | AT2T |
| SFP+ active optical cables for 10 GbE SFP+ ports | | |

| Description | Part number | Feature code |
|--|-------------|--------------|
| Lenovo 1m SFP+ to SFP+ Active Optical Cable | 00YL634 | ATYX |
| Lenovo 3m SFP+ to SFP+ Active Optical Cable | 00YL637 | ATYY |
| Lenovo 5m SFP+ to SFP+ Active Optical Cable | 00YL640 | ATYZ |
| Lenovo 7m SFP+ to SFP+ Active Optical Cable | 00YL643 | ATZ0 |
| Lenovo 15m SFP+ to SFP+ Active Optical Cable | 00YL646 | ATZ1 |
| Lenovo 20m SFP+ to SFP+ Active Optical Cable | 00YL649 | ATZ2 |

The following table lists transceivers and cables for the 25 GbE SFP28 ports.

Table 13. Transceivers and cables for 25 GbE SFP28 ports

| Description | Part number | Feature code |
|--|-------------|--------------|
| 25 GbE SFP28 SR transceivers for 25 GbE SFP28 ports | | |
| Lenovo 25GBASE-SR SFP28 Transceiver | 7G17A03537 | AV1B |
| Optical cables for 25 GbE SFP28 SR transceivers | | |
| Lenovo 0.5m LC-LC OM3 MMF Cable | 00MN499 | ASR5 |
| Lenovo 1m LC-LC OM3 MMF Cable | 00MN502 | ASR6 |
| Lenovo 3m LC-LC OM3 MMF Cable | 00MN505 | ASR7 |
| Lenovo 5m LC-LC OM3 MMF Cable | 00MN508 | ASR8 |
| Lenovo 10m LC-LC OM3 MMF Cable | 00MN511 | ASR9 |
| Lenovo 15m LC-LC OM3 MMF Cable | 00MN514 | ASRA |
| Lenovo 25m LC-LC OM3 MMF Cable | 00MN517 | ASRB |
| Passive copper cables for 25 GbE SFP28 ports | | |
| Lenovo 1m Passive 25G SFP28 DAC Cable | 7Z57A03557 | AV1W |
| Lenovo 3m Passive 25G SFP28 DAC Cable | 7Z57A03558 | AV1X |
| Lenovo 5m Passive 25G SFP28 DAC Cable | 7Z57A03559 | AV1Y |
| Active optical cables for 25 GbE SFP28 ports | | |
| Lenovo 3m 25G SFP28 Active Optical Cable | 7Z57A03541 | AV1F |
| Lenovo 5m 25G SFP28 Active Optical Cable | 7Z57A03542 | AV1G |
| Lenovo 10m 25G SFP28 Active Optical Cable | 7Z57A03543 | AV1H |
| Lenovo 15m 25G SFP28 Active Optical Cable | 7Z57A03544 | AV1J |
| Lenovo 20m 25G SFP28 Active Optical Cable | 7Z57A03545 | AV1K |

GPU adapters

The HX3521-G Certified Node supports GPU adapter selection options listed in the following table.

Table 14. GPU adapter selection options

| Description | Feature code | Quantity (min / max) |
|--|--------------|----------------------|
| ThinkSystem NVIDIA Tesla M10 32GB PCIe Passive GPU | B15V | 0 / 2 |
| ThinkSystem NVIDIA Tesla P40 24GB PCIe Passive GPU | B15U | 0 / 2 |
| NVIDIA Tesla M60 GPU, PCIe (Passive) | B13J | 0 / 2 |

Configuration notes:

- GPU adapters are optional.
- GPU adapters are installed in the PCIe x16 slots 1 and 5.
- All GPU adapters installed in the appliance must be of the same model.
- The maximum appliance memory that can be installed with the NVIDIA M10 and M60 GPUs is 1 TB.

Power supplies and cables

The ThinkAgile HX3521-G Certified Nodes ship with two 1600W (230V) Platinum hot-swap power supplies listed in the following table.

Table 15. Power supplies

| Description | Feature code | Quantity |
|---|--------------|----------|
| ThinkSystem 1600W (230V) Platinum Hot-Swap Power Supply | AVWG | 2 |

The ThinkAgile HX3521-G Certified Nodes ship with or without power cords depending on the selected option. The following table lists the rack power cables and line cords that are available for selection.

Table 16. Power cables

| Description | Part number | Feature code |
|--|-------------|--------------|
| Rack power cables | | |
| 1.0m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 00Y3043 | A4VP |
| 1.0m, 13A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08367 | B0N5 |
| 1.2m, 16A/100-250V, 2 Short C13s to Short C20 Rack Power Cable | 47C2491 | A3SW |
| 1.5m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 39Y7937 | 6201 |
| 1.5m, 13A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08368 | B0N6 |
| 2.0m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08365 | B0N4 |
| 2.0m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08369 | 6570 |
| 2.5m, 16A/100-250V, 2 Long C13s to Short C20 Rack Power Cable | 47C2492 | A3SX |
| 2.8m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08366 | 6311 |
| 2.8m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08370 | 6400 |
| 2.8m, 10A/100-250V, C13 to IEC 320-C20 Rack Power Cable | 39Y7938 | 6204 |
| 2.8m, 16A/100-250V, 2 Short C13s to Long C20 Rack Power Cable | 47C2493 | A3SY |
| 4.1m, 16A/100-250V, 2 Long C13s to Long C20 Rack Power Cable | 47C2494 | A3SZ |

| Description | Part number | Feature code |
|--|-------------|--------------|
| 4.3m, 10A/100-250V, C13 to IEC 320-C14 Rack Power Cable | 39Y7932 | 6263 |
| 4.3m, 13A/125V-10A/250V, C13 to IEC 320-C14 Rack Power Cable | 4L67A08371 | 6583 |
| Line cords | | |
| Argentina 2.8m, 10A/250V, C13 to IRAM 2073 Line Cord | 39Y7930 | 6222 |
| Argentina 4.3m, 10A/250V, C13 to IRAM 2073 Line Cord | 81Y2384 | 6492 |
| Australia/New Zealand 2.8m, 10A/250V, C13 to AS/NZS 3112 Line Cord | 39Y7924 | 6211 |
| Australia/New Zealand 4.3m, 10A/250V, C13 to AS/NZS 3112 Line Cord | 81Y2383 | 6574 |
| Brazil 2.8m, 10A/250V, C13 to NBR 14136 Line Cord | 69Y1988 | 6532 |
| Brazil 4.3m, 10A/250V, C13 to NBR14136 Line Cord | 81Y2387 | 6404 |
| China 2.8m, 10A/250V, C13 to GB 2099.1 Line Cord | 39Y7928 | 6210 |
| China 4.3m, 10A/250V, C13 to GB 2099.1 Line Cord | 81Y2378 | 6580 |
| Denmark 2.8m, 10A/250V, C13 to DK2-5a Line Cord | 39Y7918 | 6213 |
| Denmark 4.3m, 10A/250V, C13 to DK2-5a Line Cord | 81Y2382 | 6575 |
| Europe 2.8m, 10A/250V, C13 to CEE7-VII Line Cord | 39Y7917 | 6212 |
| Europe 4.3m, 10A/250V, C13 to CEE7-VII Line Cord | 81Y2376 | 6572 |
| India 2.8m, 10A/250V, C13 to IS 6538 Line Cord | 39Y7927 | 6269 |
| India 4.3m, 10A/250V, C13 to IS 6538 Line Cord | 81Y2386 | 6567 |
| Israel 2.8m, 10A/250V, C13 to SI 32 Line Cord | 39Y7920 | 6218 |
| Israel 4.3m, 10A/250V, C13 to SI 32 Line Cord | 81Y2381 | 6579 |
| Italy 2.8m, 10A/250V, C13 to CEI 23-16 Line Cord | 39Y7921 | 6217 |
| Italy 4.3m, 10A/250V, C13 to CEI 23-16 Line Cord | 81Y2380 | 6493 |
| Japan 2.8m, 12A/125V, C13 to JIS C-8303 Line cord | 46M2593 | A1RE |
| Japan 2.8m, 12A/250V, C13 to JIS C-8303 Line Cord | 4L67A08357 | 6533 |
| Japan 4.3m, 12A/125V, C13 to JIS C-8303 Line Cord | 39Y7926 | 6335 |
| Japan 4.3m, 12A/250V, C13 to JIS C-8303 Line Cord | 4L67A08362 | 6495 |
| Korea 2.8m, 12A/250V, C13 to KS C8305 Line Cord | 39Y7925 | 6219 |
| Korea 4.3m, 12A/250V, C13 to KS C8305 Line Cord | 81Y2385 | 6494 |
| South Africa 2.8m, 10A/250V, C13 to SABS 164 Line Cord | 39Y7922 | 6214 |
| South Africa 4.3m, 10A/250V, C13 to SABS 164 Line Cord | 81Y2379 | 6576 |
| Switzerland 2.8m, 10A/250V, C13 to SEV 1011-S24507 Line Cord | 39Y7919 | 6216 |
| Switzerland 4.3m, 10A/250V, C13 to SEV 1011-S24507 Line Cord | 81Y2390 | 6578 |
| Taiwan 2.8m, 10A/125V, C13 to CNS 10917-3 Line Cord | 23R7158 | 6386 |
| Taiwan 2.8m, 10A/250V, C13 to CNS 10917-3 Line Cord | 81Y2375 | 6317 |
| Taiwan 2.8m, 15A/125V, C13 to CNS 10917-3 Line Cord | 81Y2374 | 6402 |
| Taiwan 4.3m, 10A/125V, C13 to CNS 10917-3 Line Cord | 4L67A08363 | AX8B |
| Taiwan 4.3m, 10A/250V, C13 to CNS 10917-3 Line Cord | 81Y2389 | 6531 |
| Taiwan 4.3m, 15A/125V, C13 to CNS 10917-3 Line Cord | 81Y2388 | 6530 |
| United Kingdom 2.8m, 10A/250V, C13 to BS 1363/A Line Cord | 39Y7923 | 6215 |
| United Kingdom 4.3m, 10A/250V, C13 to BS 1363/A Line Cord | 81Y2377 | 6577 |
| United States 2.8m, 10A/125V, C13 to NEMA 5-15P Line Cord | 90Y3016 | 6313 |

| Description | Part number | Feature code |
|---|-------------|--------------|
| United States 2.8m, 10A/250V, C13 to NEMA 6-15P Line Cord | 46M2592 | A1RF |
| United States 2.8m, 13A/125V, C13 to NEMA 5-15P Line Cord | 00WH545 | 6401 |
| United States 4.3m, 10A/125V, C13 to NEMA 5-15P Line Cord | 4L67A08359 | 6370 |
| United States 4.3m, 10A/250V, C13 to NEMA 6-15P Line Cord | 4L67A08361 | 6373 |
| United States 4.3m, 13A/125V, C13 to NEMA 5-15P Line Cord | 4L67A08360 | AX8A |

Rack installation

The HX3521-G Certified Nodes ship with a rail kit. The following table lists the rail kit options that are available for selection.

Table 17. Rack kit selection options

| Description | Feature code | Quantity (min / max) |
|--|--------------|----------------------|
| 4-post rail kits | | |
| ThinkSystem Tool-less Slide Rail | AXCA | 0 / 1 |
| ThinkSystem Tool-less Slide Rail Kit with 2U CMA | AXCH | 0 / 1 |
| Lockable front bezel | | |
| ThinkSystem 2U Security Bezel | AURX | 0 / 1 |

Configuration note: One of the rail kits is required for selection.

The following table summarizes the rail kit features and specifications.

Table 18. Rail kit features and specifications summary

| Feature | Tool-less Slide Rail | |
|---|---|-------------------|
| | Without CMA | With 2U CMA |
| CMA | Not included | Included |
| Rail length | 730 mm (28.74 in.) | 807 mm (31.8 in.) |
| Rail type | Full-out slide (ball bearing) | |
| Tool-less installation | Yes | |
| In-rack maintenance | Yes | |
| 1U PDU support | Yes | |
| 0U PDU support | Limited* | |
| Rack type | IBM and Lenovo 4-post, IEC standard-compliant | |
| Mounting holes | Square or round | |
| Mounting flange thickness | 2 mm (0.08 in.) – 3.3 mm (0.13 in.) | |
| Distance between front and rear mounting flanges [^] | 609.6 mm (24 in.) – 863.6 mm (34 in.) | |

* If a 0U PDU is used, the rack cabinet must be at least 1100 mm (43.31 in.) deep if no CMA is used, or at least 1200 mm (47.24 in.) deep if a CMA is used.

[^] Measured when mounted on the rack, from the front surface of the front mounting flange to the rear most point of the rail.

Software

The ThinkAgile HX Certified Nodes support the following hypervisors that are installed on the 2x M.2 SSDs configured in a RAID-1 drive group:

- Nutanix Acropolis Hypervisor (AHV) (Bundled with AOS)
- VMware ESXi 6.0 Update 3
- VMware ESXi 6.5 Update 1
- VMware ESXi 6.5 Update 2
- VMware ESXi 6.7 Update 1
- VMware ESXi 6.7 Update 3
- Microsoft Windows Server 2016 Datacenter (Hyper-V)

The following table lists the hypervisors available for factory preload selection.

Table 19. Hypervisors

| Description | Feature code | Quantity |
|---|--------------|----------|
| Nutanix SW Stack on Nutanix AHV (default selection) | B15S | 1 |
| Nutanix SW Stack on VMware ESXi 6.0 | B15T | 1 |
| Nutanix SW Stack on VMware ESXi 6.5 | B15R | 1 |
| Nutanix SW Stack on VMware ESXi 6.7 | B63T | 1 |
| Nutanix SW Stack on Hyper-V 2016 | B63U | 1 |

The ThinkAgile HX Certified Nodes are shipped with the Nutanix software preloaded. Nutanix software licenses and software support are not included. Customers can use the existing Nutanix term-based software licenses and active support contracts, or they can purchase term-based software licenses and support contracts from Nutanix.

Configuration notes:

- The HX Certified Nodes support the Nutanix Software Pro and Ultimate editions; the Starter edition is not supported.
- TheHX3521-G Certified Nodes can be deployed as a cluster of 3 or more nodes (AOS 5.1.3 or later).
- The HX Certified Nodes support firmware updates from Nutanix Prism with the ThinkAgile HX Lifecycle Manager (UEFI, XCC, drives, network adapters, and SAS HBAs).

Systems management

The ThinkAgile HX Certified Nodes support the following systems management tools:

- [Lenovo XClarity Controller](#)
- [Light path diagnostics](#)
- [Lenovo XClarity Administrator and XClarity Pro](#)
- [Lenovo XClarity Energy Manager](#)

Lenovo XClarity Controller

The ThinkAgile HX Certified Nodes contain Lenovo XClarity Controller (XCC) Enterprise, which provides advanced service-processor control, monitoring, and alerting functions.

XClarity Controller Enterprise offers the following capabilities for the HX Certified Nodes:

- Gathering and viewing system information and inventory
- Monitoring system status and health
- Alerting and notifications
- Event logging
- Syslog alerting
- Configuring security
- Updating system firmware
- Real-time power usage monitoring
- Displaying graphics for real-time and historical power usage data and temperature
- Capping power usage
- Remotely controlling power (Power on, Power off, Restart)

The XClarity Controller provides remote server management through the following interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3
- Common Information Model (CIM)
- Data Center Manageability Interface (DCMI) Version 1.5
- Redfish REpresentational State Transfer (REST) API
- Web browser with HTML5 support
- Command-line interface
- Virtual Operator Panel with XClarity Mobile App via the front USB port with XClarity Controller access

Virtual Operator Panel provides quick access to system status, firmware, network, health, and alerts information. With proper authentication, it also allows to configure systems management and network settings and to control system power (Power on, Power off, Restart). The Virtual Operator Panel can be accessed from the XClarity Mobile App running on the Android or iOS mobile device that is connected to the front USB port with XClarity Controller access (See [Components and connectors](#)).

Light path diagnostics

The ThinkAgile HX3521-G Certified Nodes include basic light path diagnostics, which provides the system LEDs on the front of the appliance (see [Components and connectors](#)) and the LEDs near the monitored components (for example, the DIMM error LEDs on the system board).

Lenovo XClarity Administrator and XClarity Pro

Lenovo XClarity Administrator is a centralized systems management solution that helps administrators deliver infrastructure faster. This solution integrates easily with Lenovo x86 servers, appliances, certified nodes, Top-of-Rack Ethernet switches, and storage systems, providing automated agent-less discovery, inventory, monitoring, and alerts across multiple systems. In addition, some managed endpoints support firmware updates and configuration management.

Lenovo XClarity Administrator is an optional software component for the ThinkAgile HX Certified Nodes which can be used to manage firmware upgrades outside of the Nutanix Prism software.

Notes:

- Lenovo XClarity Administrator can be downloaded and used at no charge to discover and monitor HX Certified Nodes and manage firmware upgrades for them.
- Optional Lenovo XClarity Pro subscription license that can be selected in the configurator provides software support for XClarity Administrator for the duration of the selected warranty period. If Lenovo XClarity software support is required, the XClarity Pro option must be selected.

The XClarity Pro license can be added during the initial purchase by selecting one of the software options listed in the following table.

Table 20. XClarity Pro selection options

| Description | Feature code | Quantity (per node) |
|--------------|--------------|---------------------|
| XClarity Pro | B0W3 | 1 |

Also, XClarity Pro licenses can be added after the initial deployment by purchasing one of the software license options listed in the following table.

Table 21. Lenovo XClarity Pro license options

| Description | Part number | | Quantity (per node) |
|---|----------------|------------|---------------------|
| | NA, AP, Japan* | EMEA, LA** | |
| Lenovo XClarity Pro, per Managed Endpoint w/1 Yr SW S&S | 00MT201 | 00MT207 | 1 |
| Lenovo XClarity Pro, per Managed Endpoint w/3 Yr SW S&S | 00MT202 | 00MT208 | 1 |
| Lenovo XClarity Pro, per Managed Endpoint w/5 Yr SW S&S | 00MT203 | 00MT209 | 1 |

* NA = North America; AP = Asia Pacific.

** EMEA = Europe, Middle East, Africa; LA = Latin America.

Lenovo XClarity Administrator is available from Lenovo at no charge, and it offers the following features:

- Auto-discovery and monitoring of HX Certified Nodes
- Firmware updates and compliance enforcement
- External alerts and notifications via SNMP traps, syslog remote logging, and e-mail
- Secure connections to managed endpoints
- NIST 800-131A or FIPS 140-2 compliant cryptographic standards between the management solution and managed endpoints
- Integration into existing higher-level management systems such as cloud automation and orchestration tools through REST APIs, providing extensive external visibility and control over hardware resources
- An intuitive, easy-to-use GUI
- Scripting support with Windows PowerShell, providing command-line visibility and control over hardware resources

For more information, refer to the Lenovo XClarity Administrator Product Guide:

<http://lenovopress.com/tips1200>

Lenovo XClarity Energy Manager

Lenovo XClarity Energy Manager provides a stand-alone, web-based agent-less power management console that provides real time data and enables customers to observe, plan and manage power and cooling for Lenovo servers and appliances. Using built-in intelligence, XClarity Energy Manager identifies power consumption trends and ideal power settings, and it performs cooling analysis so that customers can define and optimize their power-saving policies.

Lenovo XClarity Energy Manager offers the following capabilities:

- Monitors room, row, rack, and device levels in the data center
- Reports vital system information, such as power, temperature and resource utilization
- Monitors inlet temperature to locate hot spots, reducing the risk of data or device damage
- Provides finely-grained controls to limit platform power in compliance with IT policy
- Generates alerts when a user-defined threshold is reached

Lenovo XClarity Energy Manager license is included in the XClarity Controller Enterprise upgrade.

For more information, refer to the Lenovo XClarity Energy Manager web page:

<http://datacentersupport.lenovo.com/us/en/solutions/lnvo-lxem>

Physical specifications

The ThinkAgile HX3521-G Certified Nodes have the following dimensions and weight (approximate):

- Height: 87 mm (3.4 in.)
- Width: 445 mm (17.5 in.)
- Depth: 720 mm (28.3 in.)
- Weight (maximum): 32 kg (70.5 lb)

Operating environment

The ThinkAgile HX3521-G Certified Nodes comply with ASHRAE class A2 specifications. The node performance might be impacted when the operating temperature is outside the ASHRAE A2 specifications.

The ThinkAgile HX Certified Nodes are supported in the following environment:

- Air temperature:
 - Operating: ASHRAE Class A2: 10 °C - 35 °C (50 °F - 95 °F); for altitudes above 900 m (2,953 ft), decrease the maximum ambient temperature by 1 °C for every 300-m (984-ft) increase in altitude
 - Non-operating: 5 °C - 45 °C (41 °F - 113 °F)
 - Storage: -40 °C - +60 °C (-40 °F - 140 °F)
- Maximum altitude: 3,050 m (10,000 ft)
- Humidity:
 - Operating: ASHRAE Class A2: 8% - 80% (non-condensing); maximum dew point: 21 °C (70 °F)
 - Storage: 8% - 90% (non-condensing)
- Electrical:
 - 200 - 240 (nominal) V AC; 50 Hz / 60 Hz
 - 180 - 300 V DC (supported in China only)
- Acoustics (maximum configuration, operating): 6.2 bels
- Vibration:
 - Operating: 0.21 G rms at 5 Hz to 500 Hz for 15 minutes across 3 axes
 - Non-operating: 1.04 G rms at 2 Hz to 200 Hz for 15 minutes across 6 surfaces
- Shock:
 - Operating: 15 G for 3 milliseconds in each direction (positive and negative X, Y, and Z axes)
 - Non-operating:
 - 12 kg - 22 kg: 50 G for 152 in./sec velocity change across 6 surfaces
 - 23 kg - 31 kg: 35 G for 152 in./sec velocity change across 6 surfaces

The following table lists the maximum system power load, rated inlet current, and system heat output based on the power supply and source voltage.

Table 22. Rated system power, inlet current, and system heat output

| Power supply | Source voltage | Maximum power load per system (two power supplies) | Rated current per inlet | System heat output |
|-----------------|----------------|--|-------------------------|--------------------|
| 1600 W Platinum | 200 - 240 V AC | 2068 W | 8.7 A | 7056 BTU/hour |
| | 180 - 300 V DC | 2024 W | 7.3 A | 6906 BTU/hour |

Regulatory compliance

The ThinkAgile HX Certified Nodes conform to the following regulations:

- United States FCC Part 15, Class A
- Canada ICES-003/NMB-03, Class A
- UL/CSA 60950-1
- Mexico NOM-019
- Argentina IEC60950-1
- Japan VCCI, Class A
- Australia/New Zealand AS/NZS CISPR 22, Class A
- China CCC GB4943.1, GB9254 Class A, GB17625.1
- Taiwan BSMI CNS13438, Class A; CNS14336-1
- Korea KN22, Class A; KN24
- Russia/GOST ME01; IEC-60950-1; GOST R 51318.22, 51318.24, 51317.3.2, and 51317.3.3
- IEC 60950-1 (CB Certificate and CB Test Report)
- Europe CE Mark (EN55022 Class A, EN60950-1, EN55024, EN61000-3-2, EN61000-3-3)
- CISPR 22, Class A
- Germany TUV-GS (EN60950-1/IEC60950-1, EK1-ITB2000)
- Reduction of Hazardous Substances (ROHS)
- Energy Star 3.0

Warranty and support

The ThinkAgile HX Certified Nodes can be configured with a one- (PRC only), three-, four, or five-year hardware warranty and various levels of service coverage with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

The base warranty provides 9x5 Next Business Day response with parts delivered. Lenovo's additional support services provide a sophisticated, unified support structure for a customer's data center, with an experience consistently ranked number one in customer satisfaction worldwide.

The following Lenovo support services are available for selection:

- **Warranty service level upgrades (Preconfigured Support)** are available to meet the on-site response time targets that match the criticality of customer's systems:
 - 1 (PRC only), 3, 4, or 5 years of service coverage.
 - 1-year or 2-year post-warranty extensions.
 - **Foundation Service:** 9x5 service coverage with next business day onsite response, with optional YourDrive YourData.
 - **Essential Service:** 24x7 service coverage with 4-hour onsite response or 24-hour committed repair (available only in select regions), bundled with YourDrive YourData.
 - **Advanced Service:** 24x7 service coverage with 2-hour onsite response or 6-hour committed repair (available only in select regions), bundled with YourDrive YourData.
- **Managed Services**

Lenovo Managed Services provide continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of a customer's data center using state of the art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware and operating system device driver levels, and software as needed. Lenovo will also maintain records of latest patches, critical updates, and firmware levels, to ensure customer's systems are providing business value through optimized performance.
- **Technical Account Management (TAM)**

A Lenovo Technical Account Manager helps customers optimize operations of their data centers based on a deep understanding of customer's business. Customers gain direct access to a Lenovo TAM, who serves as their single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time. Also, a TAM helps proactively make service recommendations and manage service relationship with Lenovo to make certain that customer's needs are met.
- **Enterprise Software Support**

Lenovo Enterprise Software Support is an additional support service that provides customers with software support on Microsoft, Red Hat, SUSE, and VMWare applications and systems. Around the clock availability for critical problems plus unlimited calls and incidents helps customers address challenges fast, without incremental costs. Support staff can answer troubleshooting and diagnostic questions, address product compatibility and interoperability issues, isolate causes of problems, report defects to software vendors, and more.
- **YourDrive YourData**

Lenovo's YourDrive YourData service is a multi-drive retention offering that ensures that customer's data is always under their control, regardless of the number of drives that are installed in their Lenovo server. In the unlikely event of a drive failure, customers retain possession of their drive while Lenovo replaces the failed drive part. Customer's data stays safely on customer premises, in their hands. The YourDrive YourData service can be purchased in convenient bundles with Foundation, Essential, or Advanced services.

- **Health Check**

Having a trusted partner who can perform regular and detailed health checks is central to maintaining efficiency and ensuring that customer systems and business are always running at their best. Health Check supports Lenovo-branded server, storage, and networking devices, as well as select Lenovo-supported products from other vendors that are sold by Lenovo or a Lenovo-Authorized Reseller.

Some regions might have different warranty terms and conditions than the standard warranty. This is due to local business practices or laws in the specific region. Local service teams can assist in explaining region-specific terms when needed. Examples of region-specific warranty terms are second or longer business day parts delivery or parts-only base warranty.

If warranty terms and conditions include onsite labor for repair or replacement of parts, Lenovo will dispatch a service technician to the customer site to perform the replacement. Onsite labor under base warranty is limited to labor for replacement of parts that have been determined to be field-replaceable units (FRUs). Parts that are determined to be customer-replaceable units (CRUs) do not include onsite labor under base warranty.

If warranty terms include parts-only base warranty, Lenovo is responsible for delivering only replacement parts that are under base warranty (including FRUs) that will be sent to a requested location for self-service. Parts-only service does not include a service technician being dispatched onsite. Parts must be changed at customer's own cost and labor and defective parts must be returned following the instructions supplied with the spare parts.

Lenovo support services are region-specific. Not all support services are available in every region. For information about Lenovo support services that are available in a specific region, refer to the following resources:

- Service part numbers in Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com/#/services>
- Lenovo Services Availability Locator
<https://lenovocator.com/>

For service definitions, region-specific details, and service limitations, refer to the following documents:

- Lenovo Statement of Limited Warranty for Infrastructure Solutions Group (ISG) Servers and System Storage
<http://pcsupport.lenovo.com/us/en/solutions/ht503310>
- Lenovo Data Center Services Agreement
<http://support.lenovo.com/us/en/solutions/ht116628>

Deployment services

The following optional Lenovo Professional Services are available for the ThinkAgile HX Certified Nodes to get customers up and running quickly:

- Basic Hardware Installation Services
 - Unpacking and inspecting the systems
 - Installing options and mounting the systems in a rack cabinet
 - Connecting the systems to electrical power and network
 - Checking and updating firmware to the latest levels
 - Verifying operations
 - Disposal of the packaging materials (within the customer site)
- Nutanix deployment services - Base (per node)
 - Conducting remote preparation and planning
 - Verifying firmware versions and performing firmware updates, if needed
 - Installing and configuring hypervisor and Nutanix controller VM
 - Creating Nutanix cluster
 - Configuring storage
 - Configuring administrative features
- Nutanix deployment services - Advanced (per cluster)
 - Configuring and integrating a virtualized environment:
 - Nutanix containers and Acropolis (AHV) cluster; or
 - VMware vCenter Server and vSphere cluster; or
 - Microsoft Hyper-V cluster and System Center Virtual Machine Manager
 - Transferring knowledge
- Nutanix deployment services - Advanced with XClarity (per cluster)
 - Nutanix deployment services - Advanced
 - Installing Lenovo XClarity
 - Configuring Lenovo XClarity network settings and performing discovery and inventory
 - Installing system updates

For more information, refer to the Data Center Deployment Services web page:

<http://www.lenovo.com/us/en/data-center/services/deployment>

Related publications and links

For more information, see these resources:

- Lenovo ThinkAgile HX Series
<http://www3.lenovo.com/us/en/p/WMD00000326>
- Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com>
- Nutanix documentation
<http://portal.nutanix.com/#/page/docs>
- Lenovo ThinkAgile HX Series Best Recipes
<http://datacentersupport.lenovo.com/us/en/solutions/ht505413>
- Lenovo Data Center Support
<http://datacentersupport.lenovo.com>

Related product families

Product families related to this document are the following:

- [Hyperconverged Infrastructure](#)
- [Hyperconverged Infrastructure](#)
- [Nutanix Alliance](#)
- [ThinkAgile HX Series for Nutanix](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, LP1017, was created or updated on April 14, 2020.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1017>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1017>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®
Lenovo Services
ThinkAgile®
ThinkSystem®
TruDDR4
XClarity®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Microsoft®, Hyper-V®, PowerShell, Windows PowerShell®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.