

QLogic 2-port 10Gb CNA (CFFh) for BladeCenter

Product Guide (withdrawn product)

The QLogic 2-port 10Gb Converged Network Adapter (CFFh) for BladeCenter offers robust 8Gb Fibre Channel storage connectivity and 10Gb networking over a single Converged Enhanced Ethernet (CEE) link. Because this adapter combines the functions of a Network Interface Card and a Host Bus Adapter on a single converged adapter, clients can realize potential benefits in cost, power and cooling, and data center footprint by deploying less hardware.

Figure 1 shows the QLogic 2-port 10Gb Converged Network Adapter (CFFh).



Figure 1. The QLogic 2-port 10Gb Converged Network Adapter (CFFh)

Did you know?

These Converged Network Adapters are backward compatible with many 4Gb storage targets and work with most existing LAN and SAN infrastructures, providing an investment protection when consolidating data centers. You can use this adapter with the 10Gb Pass-Thru Module and connect to a converged top-of-rack switch such as the Brocade 8000 or Nexus 5000. With this setup, you can reduce hardware, as well as power and cooling costs, while boosting performance by operating at 10Gb bandwidth.

The adapter connects to the midplane directly, without having to use cables or SFP modules. By eliminating these components for up to 14 servers, the resulting savings alone cover the BladeCenter chassis investment.

Part number information

Table 1. Ordering part number and feature code

Description	Part number	Feature code (x-config / e-config)
QLogic 2-port 10Gb CNA (CFFh) for BladeCenter	00Y3280*	A3JB / 8275
QLogic 2-port 10Gb Converged Network Adapter (CFFh)*	42C1830*	3592 / 8275*

* Withdrawn from marketing

These part numbers include the following items:

- One QLogic 2-port 10Gb Converged Network Adapter (CFFh)
- Documentation package

Features

The expansion card has the following features:

- Combo Form Factor (CFFh) PCI Express 2.0 x8 adapter
- Communication module: QLogic ISP8112
- Support for up to two CEE HSSMs in a BladeCenter H or HT chassis
- Support for 10Gb Converged Enhanced Ethernet (CEE)
- Support for Fiber Channel over Converged Enhanced Ethernet (FCoCEE)
- Full hardware offload for FCoCEE protocol processing
- Support for IPv4 and IPv6
- Support for SAN boot over CEE, PXE boot, and iSCSI boot
- Support for Wake on LAN
- Support for Jumbo Frames
- Support for BladeCenter Open Fabric Manager for BIOS, UEFI, and FCode

Stateless offload features include:

- IP, TCP, and UDP checksum offloads
- Large and Giant Send Offload (LSO, GSO)
- Receive Side Scaling (RSS)
- Header-data split
- Interrupt coalescing
- NetQueue

IEEE standards compliance:

- 802.1Qbb rev. 0 (Priority-based flow control)
- 802.1Qaz rev. 0 (Enhanced transmission selection)
- 802.1Qaz rev. 0 (DCBX protocol)
- 802.3ae (10Gb Ethernet)
- 802.1q (VLAN)
- 802.3ad (Link Aggregation)
- 802.1p (Priority Encoding)
- 802.3x (Flow Control)
- 802.3ap (KX/KX4)
- IEEE 1149.1 (JTAG)
- IPv4 Specification (RFC 791)
- IPv6 Specification (RFC 2460)
- TCP/UDP Specification (RFC 793/768)
- ARP Specification (RFC 826)

Operating environment

The expansion card has the following physical specifications:

- Temperature:
- 0 to 55 °C (32 to 113 °F) at 0 to 914 m (0 to 3000 ft.) operating
- -43 to 73 °C (-40 to 163 °F) at 0 to 914 m (0 to 3000 ft.) storage
- Relative humidity: 5% to 93% (non-condensing)

Supported servers and I/O modules

The QLogic 2-port 10Gb Converged Network Adapter (CFFh) is supported in the BladeCenter servers that are listed in Table 2.

Table 2. Supported servers

Part number	Product description	HS12 (8028)	HS22 (7870)	HS22V (7871)	HS23 (7875)	HS23E (8038)	HX5 (7873)	PS700/1/2 (8406)	PS703/4 (7891)
00Y3280	QLogic 2-port 10Gb CNA (CFFh) for BladeCenter	Y	Y	Y	Y	Y	Y	Y	Y

Figure 2 shows where the CFFh card is installed in a BladeCenter server.

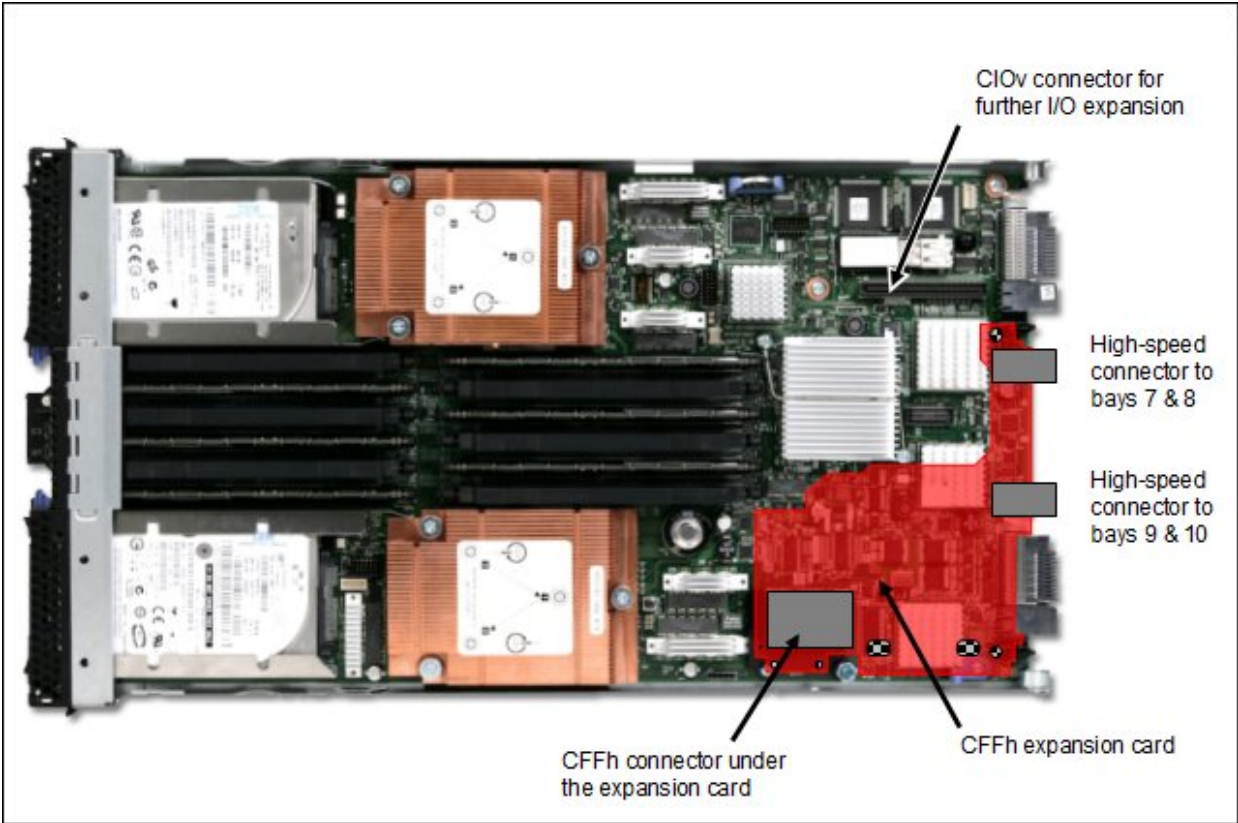


Figure 2. Location on the BladeCenter server planar where the CFFh card is installed

BladeCenter chassis support is based on the blade server type in which the expansion card is installed. Consult ServerProven to see in which chassis each blade server type is supported:
<http://ibm.com/servers/eserver/serverproven/compat/us/>.

Table 3 lists the I/O modules that can be used to connect to the QLogic 2-port 10Gb Converged Network Adapter (CFFh).

Table 3. I/O modules supported with the QLogic 2-port 10Gb Converged Network Adapter (CFFh)

		BladeCenter S	BladeCenter E	BladeCenter H	BladeCenter T	BladeCenter HT	MSIM	MSIM-HT
IBM Virtual Fabric 10Gb Switch Module	46C7191	N	N	Y	N	Y	N	N
10Gb Ethernet Pass-Thru Module	46M6181	N	N	Y	N	Y	N	N
Cisco Nexus 4001I Switch Module	46M6071	N	N	Y	N	Y	N	N
Brocade Converged 10GbE Switch Module	69Y1909	N	N	Y	N	Y	N	N
BNT 6-port 10 Gb High Speed Switch*	39Y9267	N	N	N	N	N	N	N

* Withdrawn from marketing

Supported I/O modules are supported in BladeCenter H and BladeCenter HT chassis only.

In BladeCenter H, the ports of CFFh cards are routed through the midplane to I/O bays 7, 8, 9, and 10, as shown in Figure 3. The BladeCenter HT is similar in that the CFFh cards are also routed through the midplane to I/O bays 7, 8, 9, and 10.

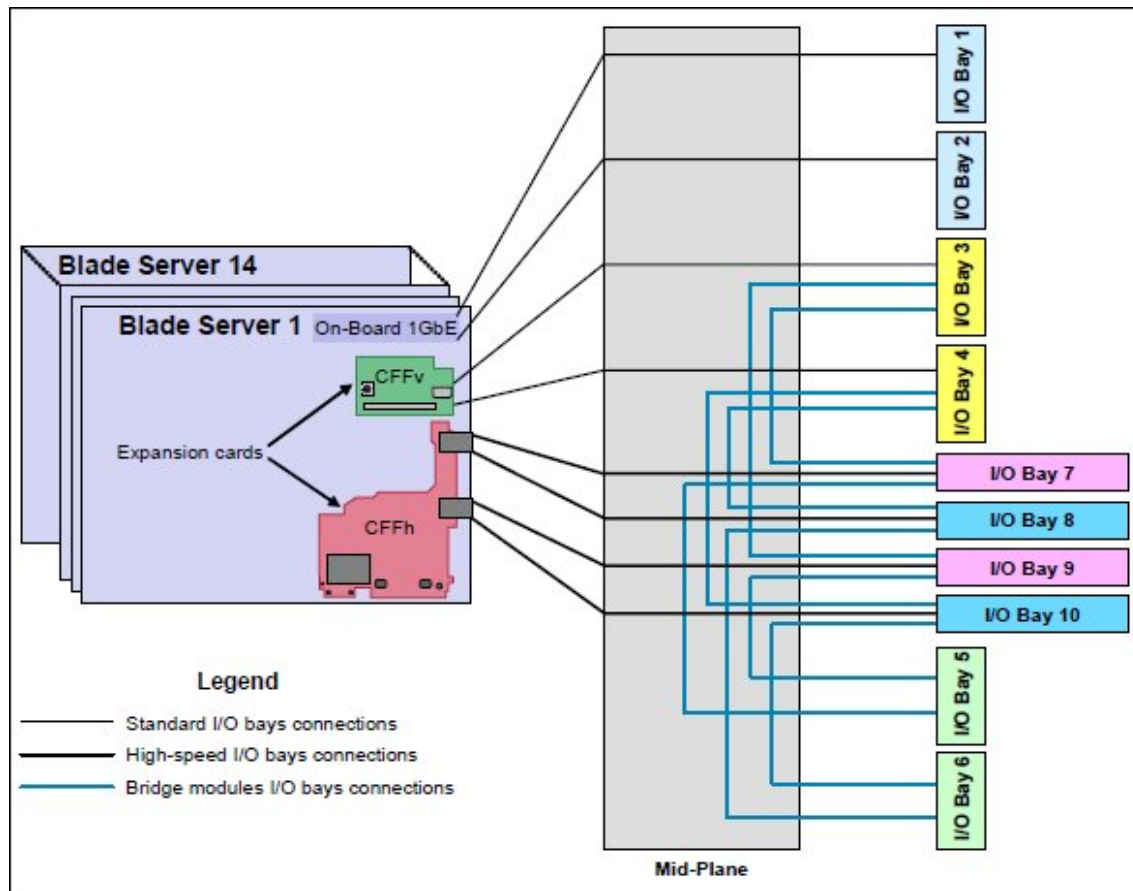


Figure 3. BladeCenter H I/O topology showing the I/O paths from CFFh expansion cards

Two I/O module must be installed in the chassis for each Ethernet port that you wish to use on the expansion card. Table 4 lists the specific I/O bays in the chassis.

Table 4. Locations of I/O modules required to connect to the expansion card

Expansion card	I/O bay 7	I/O bay 8	I/O bay 9	I/O bay 10
QLogic 2-port 10Gb Converged Network Adapter (CFFh)	Supported I/O module	Not used	Supported I/O module	Not used

Popular configurations

Figure 4 shows the use of 10Gb Ethernet Pass-Thru Modules to route two Ethernet ports from QLogic 2-port 10Gb Converged Network Adapter (CFFh) installed into each server. Two 10Gb Ethernet Pass-Thru Modules are installed in bay 7 and bay 9 of the BladeCenter H chassis. All connections between the controller, card, and the switch modules are internal to the chassis. No internal cabling is needed. External (top of rack,TOR) switches that support FCoCEE and cabling are required for the pass-thru module to operate.

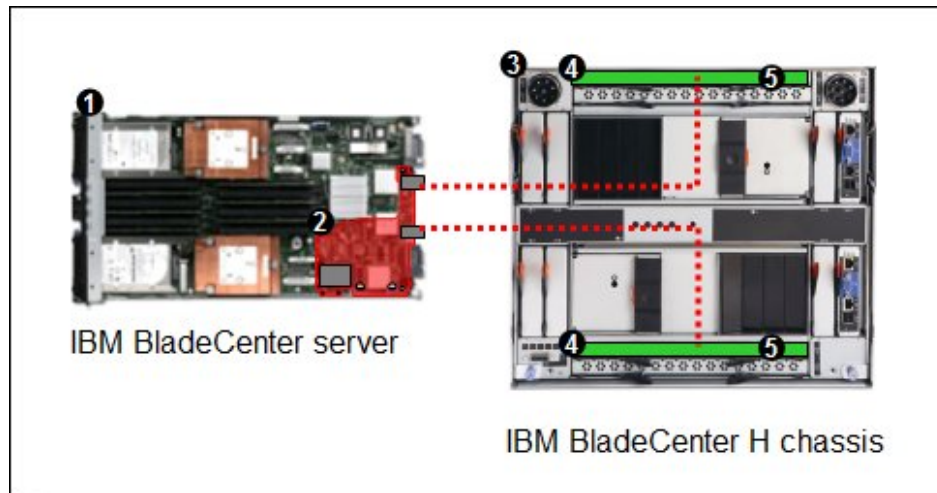


Figure 4. A converged 20Gb solution using two 10Gb Ethernet Pass-Thru Modules

The components used in this configuration are listed in Table 5.

Table 5. Components used when connecting QLogic 2-port 10Gb Converged Network Adapter (CFFh) to two 10Gb Ethernet Pass-Thru Modules

Diagram reference	Part number/machine type	Description	Quantity
1	Varies	BladeCenter HS22 or other supported server	1 to 14
2	00Y3280	QLogic 2-port 10Gb CNA (CFFh) for BladeCenter	1 per server
3	8852 or 8740/8750	BladeCenter H or BladeCenter HT	1
4	46M6181	10Gb Ethernet Pass-Thru Module	2
5	44W4408	IBM 10GBase-SR SFP+ Transceiver	Up to 28*

*The 10Gb Ethernet Pass-Thru Module has 14 external 10Gb ports. You must have one transceiver for each 10Gb port in an I/O module.

Operating system support

The expansion card supports the following operating systems on the HS and LS blades:

- Microsoft Windows Server 2003, Web Edition
- Microsoft Windows Server 2003/2003 R2, Datacenter Edition
- Microsoft Windows Server 2003/2003 R2, Datacenter x64 Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise x64 Edition
- Microsoft Windows Server 2003/2003 R2, Standard Edition
- Microsoft Windows Server 2003/2003 R2, Standard x64 Edition
- Microsoft Windows Server 2008 R2

- Microsoft Windows Server 2008, Datacenter x64 Edition
- Microsoft Windows Server 2008, Datacenter x86 Edition
- Microsoft Windows Server 2008, Enterprise x64 Edition
- Microsoft Windows Server 2008, Enterprise x86 Edition
- Microsoft Windows Server 2008, Standard x64 Edition
- Microsoft Windows Server 2008, Standard x86 Edition
- Microsoft Windows Server 2008, Web x64 Edition
- Microsoft Windows Server 2008, Web x86 Edition
- Microsoft Windows Small Business Server 2003/2003 R2 Premium Edition
- Microsoft Windows Small Business Server 2003/2003 R2 Standard Edition
- Red Hat Enterprise Linux 5 Server Edition
- Red Hat Enterprise Linux 5 Server Edition with Xen
- Red Hat Enterprise Linux 5 Server with Xen x64 Edition
- Red Hat Enterprise Linux 5 Server x64 Edition
- Red Hat Enterprise Linux 6 Server Edition
- Red Hat Enterprise Linux 6 Server x64 Edition
- SUSE LINUX Enterprise Server 10 for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for x86
- SUSE LINUX Enterprise Server 10 with Xen for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 with Xen for x86
- SUSE LINUX Enterprise Server 11 for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for x86
- SUSE LINUX Enterprise Server 11 with Xen for AMD64/EM64T
- VMware ESX 4.0
- VMware ESX 4.1
- VMware ESXi 4.0
- VMware ESXi 4.1
- VMware vSphere 5
- VMware vSphere 5.1

Support for operating systems is based on the combination of the expansion card and the blade server in which it is installed. See IBM ServerProven for the latest information about the specific versions and service packs supported: <http://ibm.com/servers/eserver/serverproven/compat/us/>. Select the blade server and then select the expansion card to see the supported operating systems.

The expansion card supports the following operating systems on the Power Systems blades:

- IBM AIX 5L for POWER Version 5.3
- IBM AIX Version 6.1
- IBM Virtual I/O Server
- IBM i 6.1
- IBM i 7.1
- Red Hat Enterprise Linux 5 for IBM POWER
- SUSE LINUX Enterprise Server 10 for IBM POWER
- SUSE LINUX Enterprise Server 11 for IBM POWER

Related publications

For more information refer to these documents:

- U.S. Product Announcement - RoHS options reintroduced (October 16, 2012)
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS112-177>
- U.S. Product Announcement (May 26, 2009)
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS109-331>
- *QLogic 2-port 10Gb Converged Network Adapter (CFFh) for BladeCenter Installation and User's Guide*
(You will need to download the "publication release" EXE file and run it to unpack the PDF)
<http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5081072>
- Software and firmware for the adapter
http://driverdownloads.qlogic.com/QLogicDriverDownloads_UI/Product_detail_new.aspx?oemid=395
- IBM US Announcement Letter
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS109-331>
- BladeCenter Interoperability Guide
<http://lenovopress.com/bcig>
- *BladeCenter Products and Technology*, SG24-7523
<http://lenovopress.com/sg247523>

Related product families

Product families related to this document are the following:

- [Blade Network Adapters](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, TIPS0716, was created or updated on December 7, 2012.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/TIPS0716>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/TIPS0716>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

BNT®

BladeCenter Interoperability Guide

BladeCenter Open Fabric

BladeCenter®

ServerProven®

The following terms are trademarks of other companies:

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.