

ServeRAID M5210 and M5210e SAS/SATA Controllers

Product Guide (withdrawn product)

The ServeRAID M5210 and M5210e SAS/SATA Controllers are high performance 12 Gb SAS controllers for internal disk storage. They are part of the ServeRAID M Series family that offers a complete server storage solution consisting of RAID controllers, cache/flash modules, energy packs, and software feature upgrades in an ultra-flexible offerings structure. These products are optimized to deliver the performance that is demanded by the ever-growing I/O requirements of today's enterprises. The M5210 is a low profile PCIe adapter, and the M5210e is integrated in servers such as the x3750 M4 and x3650 M4 HD. The two controllers share a common set of upgrades, simplifying inventory management.

The following figure shows the ServeRAID M5210 Controller with an optional cache installed.

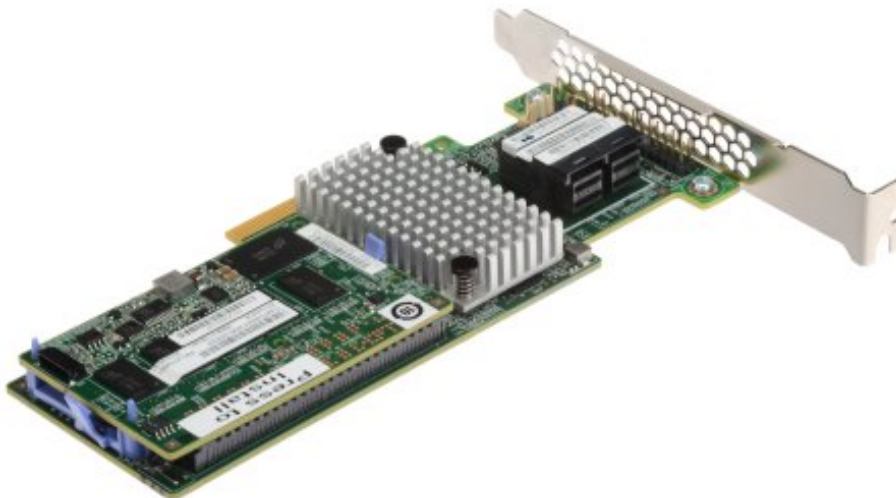


Figure 1. ServeRAID M5210 SAS/SATA Controller (with an optional cache installed)

Did you know?

The ServeRAID M5210 and M5210e SAS/SATA Controllers are optimized for high-performance, internal data storage, with a 12 Gbps SAS controller featuring a DDR3 1866 MHz cache memory interface and PCIe 3.0 host interface.

The ServeRAID M5200 portfolio is designed around several base solutions with upgrades that are rich with features to satisfy a wide range of storage needs while minimizing parts-on-the-floor upgrades.

Upgrade features, such as support for RAID 6 and 60, performance optimization, and caching with solid-state drives (SSDs) no longer require a hardware key. They are implemented through Features-on-Demand (FoD) software licenses.

Part number information

The following table provides the ordering part numbers and feature codes.

Withdrawn: All adapters and upgrades listed below are withdrawn from marketing.

Table 1. Ordering part numbers and feature codes

Description	Part number	Feature code
Base controller		
ServeRAID M5210e SAS/SATA Controller	Onboard	Onboard
ServeRAID M5210 SAS/SATA Controller	46C9110	A3YZ
Cache upgrades		
ServeRAID M5200 Series 1GB Cache/RAID 5 Upgrade	47C8656	A3Z0
ServeRAID M5200 Series 1GB Flash/RAID 5 Upgrade	47C8660	A3Z1
ServeRAID M5200 Series 2GB Flash/RAID 5 Upgrade	47C8664	A3Z2
ServeRAID M5200 Series 4GB Flash/RAID 5 Upgrade	47C8668	A3Z3
Features on Demand (FoD) upgrades*		
ServeRAID M5200 Series Zero Cache/RAID 5 Upgrade FoD	47C8708	A3Z6
ServeRAID M5200 Series RAID 6 Upgrade FoD	47C8706	A3Z5
ServeRAID M5200 Series Performance Accelerator FoD	47C8710	A3Z7
ServeRAID M5200 Series SSD Caching Enabler FoD	47C8712	A3Z8

* One M5200 Series FoD upgrade activates the feature on all M5200 Series and M5100 Series controllers that are installed in the server. The M5200 Series Zero Cache/RAID 5 Upgrade also activates the equivalent upgrades for M1100 and M1200 Series controllers.

The ServeRAID M5210 option part number includes the following items:

- One ServeRAID M5210 adapter with a full-height (3U) bracket
- One low-profile (2U) bracket
- Documentation package

The ServeRAID M5200 Series 1GB Cache/RAID 5 Upgrade option part number includes the following items:

- Cache module
- Documentation package

The ServeRAID M5200 Series 1GB, 2GB, and 4GB Flash/RAID 5 Upgrade option part numbers include the following items:

- One Flash/Cache module
- One Offload power module
- Two power module cables (425 mm and 925 mm)
- Documentation package

The ServeRAID M5200 Series Zero Cache/RAID 5 Upgrade, RAID 6 Upgrade, SSD Performance Accelerator, and SSD Caching Enabler option part numbers include the following items:

- One M5200 Series upgrade authorization letter
- Feature Activation Instructions

Features

The ServeRAID M5210 and M5210e SAS/SATA controllers have the following standard features:

- **Auto-resume on array rebuild or array reconstruction after the loss of system power**
Auto-resume uses non-volatile RAM (NVRAM) to save the rebuild progress during a host reboot or power failure to automatically resume from the last checkpoint. Auto-resume ensures that data integrity is maintained throughout the process. The card supports a number of features that can be implemented without rebooting the server. Applications, such as email and web server, benefit from avoiding downtime during the transition.
- **Online Capacity Expansion**
Online Capacity Expansion (OCE) allows the capacity of a virtual disk to be expanded by adding new physical disks or making use of unused space on existing disks, without requiring a reboot.
- **Online RAID Level Migration**
Online RAID Level Migration, which is also known as logical drive migration, can migrate a virtual disk from any RAID level to any other RAID level without requiring a reboot. System availability and application functionality remain unaffected.
- **Fast initialization for quick array setup**
Fast initialization quickly writes zeros to the first and last sectors of the virtual drive. This feature allows you to immediately start writing data to the virtual drive while the initialization is running in the background.
- **Consistency check for background data integrity**
Consistency check verifies that all stripes in a virtual disk with a redundant RAID level are consistent. The consistency check mirrors data when an inconsistent stripe is detected for RAID 1 and re-creates the parity from the peer disks for RAID 5 or RAID 6. Consistency checks can be scheduled to take place periodically.
- **Extensive online configuration options and advanced monitoring and event notification**
Management tools provide convenience for the configuration of logical volumes and alerting when errors have occurred or are about to occur.
- **Patrol read for media scanning and repairing**
Patrol read is a background sentry service that pro-actively discovers and corrects media defects (bad sectors) that arise normally as a disk drive ages. The service issues a series of verify commands, and if a bad block is discovered, the card's firmware uses RAID algorithms to re-create the missing data and remap the sector to a good sector. The task is interruptible based on controller activity and host operations. The firmware also provides an interface where the patrol read task can be initiated, set up for continuous operation, and terminated from a management application. Patrol read can be activated by a manual command or automatically.
- **Global and dedicated hot spare with revertible hot spare support**
A hot spare rebuilds data from all virtual disks within the disk group in which it is configured. ServeRAID can define a physical disk as a hot spare to replace a failed drive. Hot spares can be configured as either global or dedicated. A global hot spare allows any physical drive to be designated as a hot spare. A dedicated hot spare allows the user to assign a hot spare drive to a particular array of the same drive type.
- **Drive roaming**
Drive roaming occurs when the physical disks are changed to different ports on the same controller. When the drives are placed on different channels, the controller detects the RAID configuration from the configuration data on the drives.
- **Human Interface Infrastructure (HII) configuration utility for pre-boot array configuration and management**
HII is a utility that is built into the ServeRAID controller that allows you to configure drive groups and logical drives before installing or booting the operating system.

- **MegaRAID Storage Manager management software**
MegaRAID Storage Manager is an easy-to-use advanced RAID management application that is used across the entire family of ServeRAID M controllers. It allows you to configure, monitor, and maintain drive groups, virtual drives, and advanced features with an intuitive GUI, reducing administrative efforts and simplifying troubleshooting.

Note: RAID 10, 50 and 60 drive groups do not support Online Capacity Expansion and Online RAID Level Migration. RAID 0, 1, 5, and 6 drive groups do not support Online Capacity Expansion and Online RAID Level Migration if two or more virtual drives are defined on a single drive group.

The following features are optional and require the respective upgrade to be purchased:

- **Support for RAID 6 and 60 with M5200 Series RAID 6 Upgrade (47C8706)**
This is a Features on Demand upgrade and one upgrade is needed per server; all M5200 and M5100 series adapters installed in the server will have this upgrade enabled automatically.
- **MegaRAID SafeStore support for self-encrypting drive (SED) services**
MegaRAID SafeStore encryption services offer instant secure erase and local key management for self-encrypting drives. This technology represents a step forward in securing data on a disk drive from any unauthorized access or modification resulting from theft, loss, or repurposing of drives. Instant secure erase permanently removes data when repurposing or decommissioning SEDs. SafeStore local key management provides the necessary management and protection of SEDs by using a simple pass phrase, security key identifier, and security key file that can be set and applied to all SEDs that are assigned to a ServeRAID adapter. This feature removes the complexity of managing each SED's unique encryption key, and it essentially relieves the administrator of most of the daily tasks of securing data. The SafeStore is a part of any M5200 Series RAID 5 upgrade that is available: 47C8708, 47C8656, 47C8660, 47C8664, or 47C8668.
- **MegaRAID flash cache protection**
MegaRAID flash cache protection uses NAND flash memory, which is powered by a supercapacitor, to protect data that is stored in the controller cache. This module eliminates the need for a lithium-ion battery, which is commonly used to protect DRAM cache memory on PCI RAID controllers. To avoid the possibility of data loss or corruption during a power or server failure, flash cache protection technology transfers the contents of the DRAM cache to NAND flash using power from the offload power module. After the power is restored to the RAID controller, the content of the NAND flash is transferred back to the DRAM, which is flushed to disk.
- **MegaRAID FastPath SSD performance acceleration**
MegaRAID FastPath software provides high-performance I/O acceleration for SSD-based virtual drives by using a low latency I/O path to increase the maximum I/O per second (IOPS) capability of the controller. This feature boosts the performance of applications with a highly random data storage access pattern, such as transactional databases. The feature is activated by enabling M5200 Series Performance Accelerator (47C8710).

This is a Features on Demand upgrade and only one upgrade is needed per server; all M5200 and M5100 series adapters installed in the server will have this upgrade enabled automatically.

- **MegaRAID CacheCade SSD caching for traditional hard disk drives**
MegaRAID CacheCade read/write software accelerates the performance of hard disk drive (HDD) arrays with only an incremental investment in solid-state drive (SSD) technology. The software enables SSDs to be configured as a dedicated pool of controller cache to help maximize the I/O performance for transaction-intensive applications, such as databases and web serving. CacheCade software tracks data storage access patterns and identifies the most frequently accessed data. The hot data is then automatically stored on the solid-state storage devices that are assigned as a dedicated cache pool on a ServeRAID controller with the M5200 Series SSD Caching feature (47C8712) enabled.

This is a Features on Demand upgrade and only one upgrade is needed per server; all M5200 and M5100 series adapters installed in the server will have this upgrade enabled automatically.

Note: Not all SSDs support CacheCade feature. For details, refer to the following web page:
<https://support.lenovo.com/us/en/documents/MIGR-5094754>

Technical specifications

The ServeRAID M5210 and M5210e SAS/SATA controllers have the following specifications:

- LSI SAS3108 12 Gbps RAID on Chip (ROC) controller.
- PCI low profile, half-length - MD2 form factor (M5210) or onboard chip (M5210e).
- Eight internal 12 Gbps SAS/SATA ports (support for 12, 6, or 3 Gbps SAS speeds and 6 or 3 Gbps SATA speeds). Up to 12 Gbps throughput per port.
- Two internal x4 HD Mini-SAS connectors (SFF-8643).
- PCI Express 3.0 x8 host interface.
- Support for RAID 0, 1, and 10 standard; support for RAID 5, 50, 6, and 60 with optional upgrades.
- Optional onboard data cache (DDR3 running at 1866 MHz) with the choice of the following backup:
 - 1 GB (no battery backup)
 - 1 GB, 2 GB, or 4 GB with flash backup
- Support for SAS and SATA HDDs and SSDs.
- Support for intermixing SAS and SATA HDDs and SSDs. Mixing different types of drives in the same array is not supported.
- Support for intermixing of 12 Gbps and 6 Gbps drives
- Connections to up to 32 internal drives, depending on the server model.
- Optional support for self-encrypting drives (SEDs) with MegaRAID SafeStore.
- Optional support for SSD performance acceleration with MegaRAID FastPath and SSD caching with MegaRAID CacheCade.
- Support for up to 64 virtual disks, up to 128 arrays, up to 16 virtual disks per array, and up to 32 physical drives per array.
- Support for logical drive sizes greater than 2 TB.
- Support for Integrated MegaRAID (iMR) mode (no cache memory upgrades installed) or MegaRAID (MR) mode (requires 1 GB, 2 GB, or 4 GB cache memory upgrade).
 - iMR mode supports (no cache memory upgrades installed) the following features:
 - RAID 0, 1, and 10, and, optionally, 5 and 50
 - Fixed stripe unit size of 64 KB
 - Self-encrypting drives with optional Zero Cache/RAID 5 upgrade
 - Both RAID and JBOD (pass-thru mode with system drives) configurations
 - Up to 16 drives are supported in a RAID configuration.
 - Up to 63 drives are supported in a JBOD configuration. (JBOD drives can be used as bootable drives.)
 - MR mode supports (1 GB, 2 GB, or 4 GB cache memory upgrade required):
 - RAID 0, 1, 10, 5, and 50 and, optionally, 6 and 60 (Non-RAID is not supported.)
 - Configurable stripe unit size from 64 KB up to 1 MB
 - Self-encrypting drives
 - Optional SSD performance features (FastPath and CacheCade)
- Compliant with Disk Data Format (DDF) configuration on disk (CoD).
- S.M.A.R.T. support.
- MegaRAID Storage Manager management software.

Feature upgrade matrix

The ServeRAID M5210 and M5210e provide support for RAID 0, 1, and 10 as standard capabilities. Additional optional functional upgrades are available to expand the standard capabilities. Some upgrades do not depend on other upgrades and can be applied to standard controllers (we call them primary upgrades). Certain upgrades cannot be applied to standard controllers and require that other upgrades are enabled before applying these upgrades (we call them secondary upgrades). There are two types of available upgrades: hardware (HW) and Feature on Demand (FoD). Hardware upgrades contain physical parts (for example, cache module or supercapacitor). FoD upgrades are software licenses. The following table lists the available primary upgrades, their capabilities, and types.

Table 2. ServeRAID M5210 and M5210e primary upgrades and their features

Feature			RAID 5 & 50	SED	1 GB cache	2 GB cache	4 GB cache	Flash-backed cache
Option description	Part number	Type						
Zero Cache/RAID 5 Upgrade	47C8708	FoD	Yes	Yes	No	No	No	No
1GB Cache/RAID 5 Upgrade	47C8656	HW	Yes	Yes	Yes	No	No	No
1GB Flash/RAID 5 Upgrade	47C8660	HW	Yes	Yes	Yes	No	No	Yes
2GB Flash/RAID 5 Upgrade	47C8664	HW	Yes	Yes	No	Yes	No	Yes
4GB Flash/RAID 5 Upgrade	47C8668	HW	Yes	Yes	No	No	Yes	Yes

The following table shows the secondary upgrades, their capabilities, types, and dependencies. The primary feature upgrades, on which the secondary upgrades depend, are listed in their respective columns. "Required" means that the primary upgrade that is listed in the column must be enabled before enabling the secondary feature that is listed in that particular row.

Table 3. ServeRAID M5210 and M5210e secondary upgrades, their features, and dependencies

Primary feature upgrades		Option description		Zero Cache/ RAID 5	1GB Cache/ RAID 5	1GB Flash/ RAID 5	2GB Flash/ RAID 5	4GB Flash/ RAID 5
Secondary feature upgrades		Part number		47C8708	47C8656	47C8660	47C8664	47C8668
		Upgrade type		FoD	HW	HW	HW	HW
Feature	Option description	Part number	Type					
RAID 6 and 60	RAID 6 Upgrade	47C8706	FoD	No support	Required	Required	Required	Required
FastPath	SSD Performance Accelerator	47C8710	FoD	No support	Required	Required	Required	Required
CacheCade	SSD Caching Enabler	47C8712	FoD	No support	Required	Required	Required	Required

Note: All ServeRAID Feature on Demand upgrades are system-wide. One FoD upgrade part number will enable the feature on all ServeRAID M5200-series adapters (M5210, M5210e, M5215, M5225) installed in the server. In the case of the x3950 X6, if you have partitioning enabled, then the FoD upgrade will enable the feature on all M5200-series adapters installed in that partition; the other partition will require a separate FoD upgrade.

Server support

The following tables list the servers that support the ServeRAID M5210 and M5210e controllers.

Support for System x and dense servers with Xeon E5/E7 v4 and E3 v5 processors

Table 4. Support for System x and dense servers with Xeon E5/E7 v4 and E3 v5 processors

Part number	Description	x3250 M6 (3943)	x3250 M6 (3633)	x3550 M5 (8869)	x3650 M5 (8871)	x3850 X6/x3950 X6 (6241, E7 v4)	nx360 M5 (5465, E5-2600 v4)	sd350 (5493)
46C9110	ServeRAID M5210 SAS/SATA Controller	Y	Y	Y	Y	Y	Y	N
Onboard	ServeRAID M5210e SAS/SATA Controller	N	N	N	N	N	N	N
47C8708	ServeRAID M5200 Series Zero Cache/RAID 5 Upgrade-FoD	Y	Y	Y	Y	Y	Y	N
47C8656	ServeRAID M5200 Series 1GB Cache/RAID 5 Upgrade	Y	Y	Y	Y	Y	Y	N
47C8660	ServeRAID M5200 Series 1GB Flash/RAID 5 Upgrade	Y	Y	Y	Y	Y	Y	N
47C8664	ServeRAID M5200 Series 2GB Flash/RAID 5 Upgrade	Y	Y	Y	Y	Y	Y	N
47C8668	ServeRAID M5200 Series 4GB Flash/RAID 5 Upgrade	Y	Y	Y	Y	Y	Y	N
47C8706	ServeRAID M5200 Series RAID 6 Upgrade-FoD	Y	Y	Y	Y	Y	Y	N
47C8710	ServeRAID M5200 Series Performance Accelerator-FoD	Y	Y	Y	Y	Y	Y	N
47C8712	ServeRAID M5200 Series SSD Caching Enabler-FoD	Y	Y	Y	Y	Y	Y	N

Support for servers with Intel Xeon v3 processors

Table 5. Support for servers with Intel Xeon v3 processors

Part number	Description	x3100 M5 (5457)	x3250 M5 (5458)	x3500 M5 (5464)	x3550 M5 (5463)	x3650 M5 (5462)	x3850 X6/x3950 X6 (6241, E7 v3)	nx360 M5 (5465)
46C9110	ServeRAID M5210 SAS/SATA Controller	N	N	Y	Y	Y	Y	Y
Onboard	ServeRAID M5210e SAS/SATA Controller	N	N	N	N	N	N	N
47C8708	ServeRAID M5200 Series Zero Cache/RAID 5 Upgrade-FoD	N	N	Y	Y	Y	Y	Y
47C8656	ServeRAID M5200 Series 1GB Cache/RAID 5 Upgrade	N	N	Y	Y	Y	Y	Y
47C8660	ServeRAID M5200 Series 1GB Flash/RAID 5 Upgrade	N	N	Y	Y	Y	Y	Y
47C8664	ServeRAID M5200 Series 2GB Flash/RAID 5 Upgrade	N	N	Y	Y	Y	Y	Y
47C8668	ServeRAID M5200 Series 4GB Flash/RAID 5 Upgrade	N	N	Y	Y	Y	Y	Y
47C8706	ServeRAID M5200 Series RAID 6 Upgrade-FoD	N	N	Y	Y	Y	Y	Y
47C8710	ServeRAID M5200 Series Performance Accelerator-FoD	N	N	Y	Y	Y	Y	Y
47C8712	ServeRAID M5200 Series SSD Caching Enabler-FoD	N	N	Y	Y	Y	Y	Y

Support for servers with Intel Xeon v2 processors

Table 6. Support for servers with Intel Xeon v2 processors

Part number	Description	x3500 M4 (7383, E5-2600 v2)	x3530 M4 (7160, E5-2400 v2)	x3550 M4 (7914, E5-2600 v2)	x3630 M4 (7158, E5-2400 v2)	x3650 M4 (7915, E5-2600 v2)	x3650 M4 BD (5466)	x3650 M4 HD (5460)	x3750 M4 (8752)	x3750 M4 (8753)	x3850 X6/x3950 X6 (3837)	x3850 X6/x3950 X6 (6241, E7 v2)	dx360 M4 (E5-2600 v2)	nx360 M4 (5455)
46C9110	ServeRAID M5210 SAS/SATA Controller	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
Onboard	ServeRAID M5210e SAS/SATA Controller	N	N	N	N	N	N	Y	Y	Y	N	N	N	N
47C8708	ServeRAID M5200 Series Zero Cache/RAID 5 Upgrade-FoD	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8656	ServeRAID M5200 Series 1GB Cache/RAID 5 Upgrade	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8660	ServeRAID M5200 Series 1GB Flash/RAID 5 Upgrade	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8664	ServeRAID M5200 Series 2GB Flash/RAID 5 Upgrade	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8668	ServeRAID M5200 Series 4GB Flash/RAID 5 Upgrade	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8706	ServeRAID M5200 Series RAID 6 Upgrade-FoD	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8710	ServeRAID M5200 Series Performance Accelerator-FoD	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N
47C8712	ServeRAID M5200 Series SSD Caching Enabler-FoD	Y	N	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	N

For more information about the System x servers that support each adapter, see the ServerProven website:
<http://www.lenovo.com/us/en/serverproven/xseries/controllers/matrix.shtml>

Operating system support

The adapter supports the following operating systems:

Tip: This table is automatically generated based on data from [Lenovo ServerProven](#).

Table 7. Operating system support for ServeRAID M5210 SAS/SATA Controller, 46C9110

Operating systems	x3850/3950 X6 (3837)	x3850/3950 X6 (6241, E7 v2)	x3850/3950 X6 (6241, E7 v3)	x3850/3950 X6 (6241, E7 v4)	x3250 M6 (3633)	nx360 M5 (5465)	x3500 M5 (5464)	x3550 M5 (5463)	x3550 M5 (8869)	x3650 M5 (5462)	x3650 M5 (8871)
Microsoft Windows Server 2008 R2	Y	Y	Y	N	N	N	Y	Y	Y	Y	N
Microsoft Windows Server 2012	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Microsoft Windows Server 2012 R2	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Microsoft Windows Server 2016	N	Y ¹	Y ¹	Y ¹	Y	Y	Y	Y	Y	Y	Y
Microsoft Windows Server 2019	N	N	N	Y	Y	N	N	N	Y	N	Y
Microsoft Windows Server version 1709	N	N	Y	Y	Y	Y	Y	Y	Y	Y	Y
Microsoft Windows Server version 1803	N	N	N	N	N	N	N	N	Y	N	Y
Red Hat Enterprise Linux 6 Server x64 Edition	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Red Hat Enterprise Linux 7	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Red Hat Enterprise Linux 8.0	N	N	N	Y	N	N	N	N	N	N	N
SUSE Linux Enterprise Server 11 for AMD64/EM64T	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
SUSE Linux Enterprise Server 12	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
SUSE Linux Enterprise Server 12 with Xen	N	N	N	N	N	Y	Y	Y	Y	Y	Y
SUSE Linux Enterprise Server 15	N	N	Y	Y	Y	Y	N	N	Y	N	Y
SUSE Linux Enterprise Server 15 with Xen	N	N	Y	Y	Y	Y	N	N	Y	N	Y
VMware vSphere 5.1 (ESXi)	Y	Y	N	N	N	Y	Y	Y	N	Y	N
VMware vSphere Hypervisor (ESXi) 5.5	Y	Y	Y	N	Y	N	Y	Y	Y	Y	Y
VMware vSphere Hypervisor (ESXi) 6.0	N	Y	Y	Y	Y	Y ²	Y ²	Y ²	Y	Y ²	Y
VMware vSphere Hypervisor (ESXi) 6.5	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	Y
VMware vSphere Hypervisor (ESXi) 6.7	N	N	N	Y	Y	Y	Y	N	Y	N	Y

¹ [in box driver support only]

² [This is a limitation with Lenovo Customized VMWare image having a downlevel LSI/Avago Provider that doesn't work properly with LSI/Avago native driver. This issue should be routed to the Lenovo VMware team that owns the Customized image. Target Fixed Date: 2016/2/1]

Warranty

The ServeRAID M5210 SAS/SATA Controller carries a 1-year limited warranty. When installed in a supported System x server, the adapter assumes the system's base warranty and any warranty upgrades.

Physical specifications

The ServeRAID M5210 SAS/SATA Controller has the following physical specifications:

Dimensions (approximate):

- Height: 15 mm (0.6 in.)
- Width: 69 mm (2.7 in.)
- Depth: 168 mm (6.6 in.)
- Weight: 99 g (0.2 lb)

Shipping dimensions (approximate):

- Height: 51 mm (2.0 in.)
- Width: 143 mm (5.6 in.)
- Depth: 238 mm (9.4 in.)
- Weight: 320 g (0.7 lb)

Operating environment

The ServeRAID M5210 SAS/SATA Controller is supported in the following environment:

- Temperature: 5 - 40 °C (41 - 104 °F) at 0 - 5,000 m (0 - 16,404 ft)
- Relative humidity: 8% - 93% (non-condensing)
- Maximum altitude: 5,000 m (16,404 ft)

Agency approvals

The ServeRAID M5210 SAS/SATA Controller conforms to the following regulations:

- UL
- cUL
- IEC60950
- EMC
- FCC
- TUV
- CE
- VCCI
- BSMI
- C-tick
- KC

Related publications and links

For more information, see the following documents:

- ServeRAID M5210 SAS/SATA Controller User's Guide
<https://support.lenovo.com/docs/UM104160>
- ServeRAID M5210 SAS/SATA Controller Quick Installation Guide
<https://support.lenovo.com/docs/UM104159>
- ServeRAID M5200 Series Flash/RAID 5 Upgrade User's Guide
<https://support.lenovo.com/docs/UM103502>
- Lenovo RAID Introduction
<https://lenovopress.com/lp0578-lenovo-raid-introduction>
- Lenovo RAID Management Tools and Resources (includes links to drivers and management tools)
<https://lenovopress.com/lp0579-lenovo-raid-management-tools-and-resources>

Related product families

Product families related to this document are the following:

- [RAID Adapters](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2025. All rights reserved.

This document, TIPS1069, was created or updated on June 27, 2020.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/TIPS1069>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/TIPS1069>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ServerProven®

System x®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.