

Lenovo ThinkServer TS440

Product Guide (withdrawn product)

The Lenovo ThinkServer TS440 is the ideal server for small and medium businesses, remote or branch offices, and retail environments. It features Intel Xeon processor E3-1200 v3 product family with four cores and support for up to 32 GB of 1600 MHz DDR3 memory. Also, it offers an integrated 1 GbE NIC and additional PCIe expansion slots for advanced RAID protection and network and peripheral port scalability. Up to 48 TB of internal enterprise-class storage supports storage-intensive workloads, such as office applications, web, e-mail and file and print serving, and provides growth capacity.

The following figure shows the Lenovo ThinkServer TS440.



Figure 1. Lenovo ThinkServer TS440

Did you know?

The TS440 offers enterprise-class reliability features such as error correcting code (ECC), hot-swap components, and advanced RAID protection with flexible storage configurations at an affordable price.

Intel Active Management Technology (AMT) built into the TS440 offers easy-to-use, industry-standard management tools for remote monitoring, updates, and repairs.

The TS440 runs a wide range of server operating systems, and it also supports client OS capability.

Key features

The ThinkServer TS440 server is a tower server that has been optimized to provide enterprise-class features to growing small-to-medium-sized businesses, retail stores, and distributed enterprises.

Scalability and performance

The TS440 offers numerous features to boost performance, improve scalability, and reduce costs:

- The Intel Xeon processor E3-1200 v3 improves productivity by offering affordable single-socket system performance with 4-core processors with up to 3.7 GHz core speeds and up to 8 MB cache.
- Intelligent and adaptive system performance with Intel Turbo Boost Technology 2.0 allows processor cores to run at maximum speeds during peak workloads by temporarily going beyond processor thermal design power (TDP).
- Intel Hyper-Threading Technology boosts performance for multithreaded applications by enabling simultaneous multithreading within each processor core, up to two threads per core.
- Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better use the hardware for virtualization workloads.
- Up to four 1600 MHz DDR3 ECC UDIMMs provide speed and capacity of up to 32 GB.
- The server offers PCI Express 3.0 I/O expansion capabilities that increase the theoretical maximum bandwidth by almost 100% (8 GTps per link using 128b/130b encoding) compared to the PCI Express 2.0 (5 GTps per link using 8b/10b encoding).
- With Intel Integrated I/O Technology, the PCI Express 3.0 controller is integrated into the Intel Xeon processor E3-1200 v3 product family. Such integration reduces I/O latency and increases overall system performance.
- Up to 8x 2.5-inch or 8x 3.5-inch hot-swap (HS) drive bays provide flexible internal storage configurations and capacity.
- The use of solid-state drives (SSDs) instead of, or along with, traditional spinning drives (hard disk drives or HDDs) can significantly improve I/O performance.

Availability and serviceability

The TS440 provides many features to simplify serviceability and increase system uptime:

- The TS440 supports UDIMM memory with ECC protection which provides error correction not available in PC-class "servers" that use parity memory. Avoiding system crashes (and data loss) due to soft memory errors means greater system uptime.
- Tool-less cover removal provides easy access to upgrades and serviceable parts, such as memory and adapter cards.
- Hot-swap components such as hard drives and power supplies (select models) provide cost-efficient availability for applications.
- A choice of affordable onboard SATA RAID or advanced hardware RAID redundancy offers data protection and greater system uptime.
- The use of SSDs can provide better reliability than the use of traditional HDDs, for greater uptime.
- Built-in Active Management Technology continuously monitors system parameters, sends alerts, and enables administrators to perform remote recovery actions to minimize downtime.
- The ThinkServer EasyUpdate firmware update tool enables you to keep your server firmware up-to-date and helps you avoid unnecessary server outages.
- The ThinkServer Diagnostics software speeds up troubleshooting tasks to reduce service time.
- One-year or three-year customer-replaceable unit (CRU) and onsite limited warranty with next business day response. Optional service upgrades are available.

Manageability and security

Powerful systems management features simplify local and remote management of the TS440:

- Active Management Technology monitors server availability and enables administrators to perform remote management.
- An integrated industry-standard Unified Extensible Firmware Interface (UEFI) enables improved setup, configuration, and updates, and simplifies error handling.
- The ThinkServer EasyStartup tool simplifies the process of configuring RAID and installing supported Microsoft Windows and Linux operating systems, VMware hypervisors, and device drivers on a ThinkServer system.
- The Trusted Platform Module (TPM) (select models) enables advanced cryptographic functionality, such as digital signatures and remote attestation.
- Administrator's and power-on passwords help protect from unauthorized access to the server.
- Optional server locks such as a padlock, cable lock, or lockable front cover help prevent unauthorized access to the internal components of the server, and the intrusion switch (select models) informs about the removed or improperly installed server cover.

Energy efficiency

The TS440 offers the following energy-efficiency features to save energy, reduce operational costs, increase energy availability, and contribute to a green environment:

- Energy-efficient planar components help lower operational costs.
- 80 PLUS Gold-certified power supply (select models) enables greater energy savings while providing flexibility to meet your business needs.
- Intelligent Cooling Engine (ICE) actively monitors component temperatures in real-time and optimally adjusts the speeds of the fans to keep the system cooler and quieter.
- The ThinkServer Power Planner tool provides information about the power consumption and electric current calculation for the different configurations of servers and other devices, which helps plan deployment of servers and devices in an efficient way.
- Intel Intelligent Power Capability powers individual processor elements on and off as needed, to reduce power draw.

Components and connectors

The following figure shows the front of the TS440.

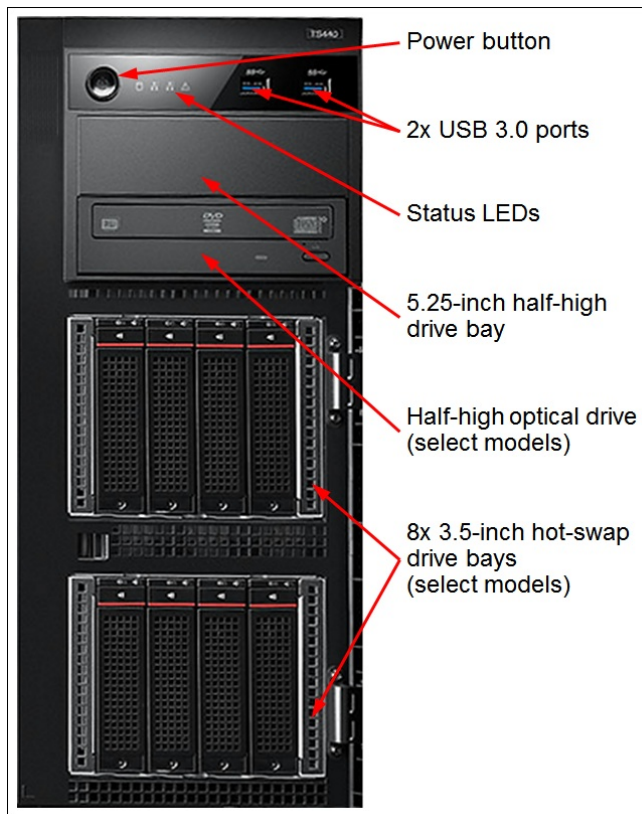


Figure 2. TS440 front view

The following figure shows the rear of the TS440.

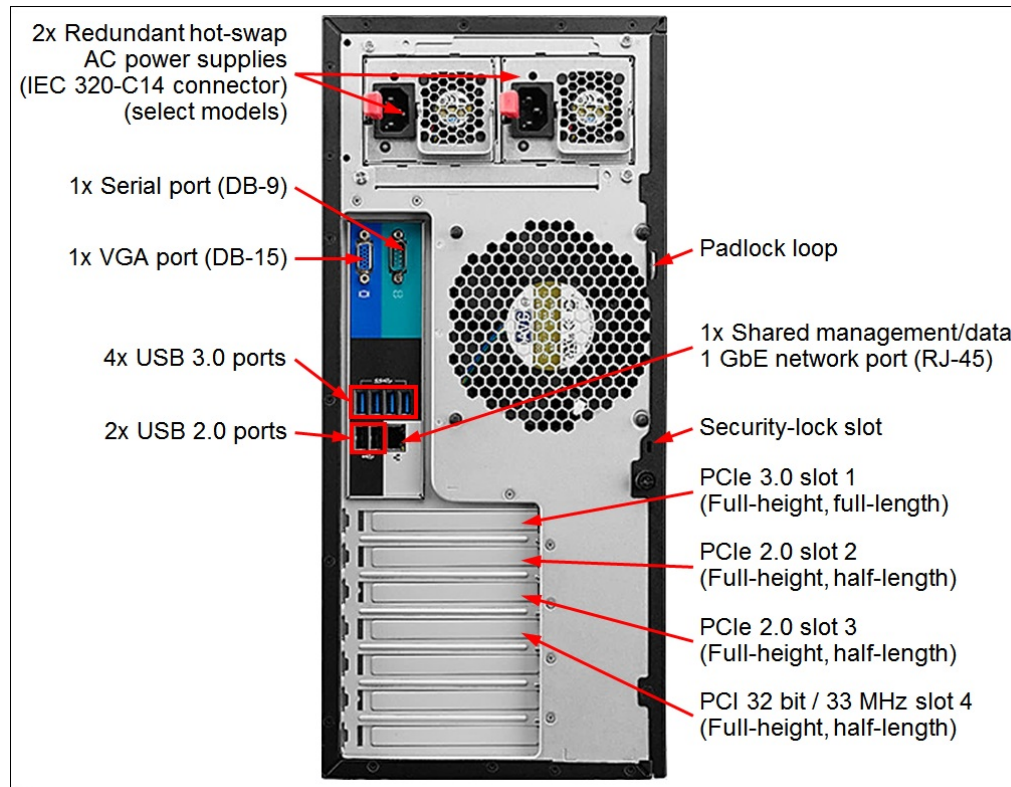


Figure 3. TS440 rear view

The following figure shows the internal components of the TS440.

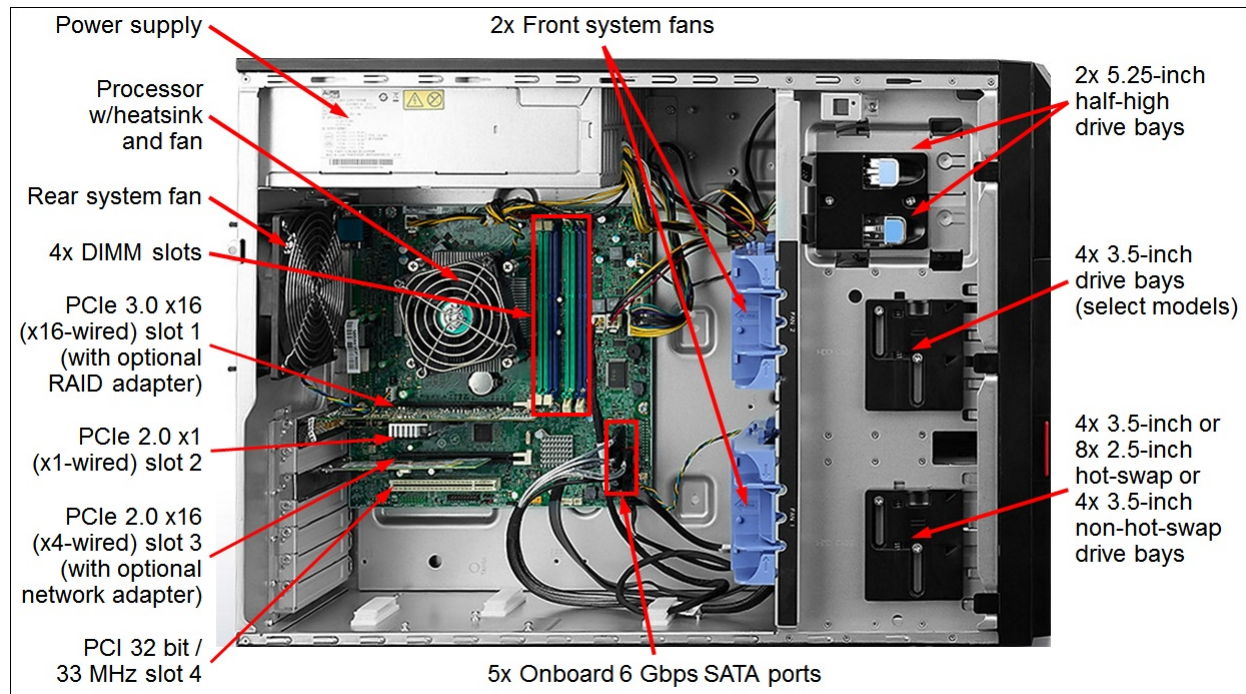


Figure 4. TS440 internal view

System specifications

The following table lists the system specifications.

Table 1. System specifications

Components	Specification
Form factor	Tower or 5U rack-mount (on a shelf)
Processor	One Intel Xeon processor E3-1200 v3 product family CPU with four cores up to 3.7 GHz, 8 MB cache, and up to 1600 MHz memory speed.
Chipset	Intel C226.
Memory	Four DIMM sockets. Support for ECC UDIMMs. DIMM speeds up to 1600 MHz.
Memory maximums	Up to 32 GB with four 8 GB UDIMMs.
Memory protection	Error-correcting code (ECC) memory.
Drive bays	<ul style="list-style-type: none"> ● 4x 3.5-inch non-hot-swap SATA drive bays ● 4x 3.5-inch (standard) + 4x 3.5-inch (optional) hot-swap SATA drive bays ● 8x 2.5-inch hot-swap SATA drive bays
Drive types	<p>2.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> ● SAS HDDs ● Nearline (NL) SATA HDDs ● SATA SSDs <p>3.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> ● SAS HDDs ● NL SAS HDDs ● NL SATA HDDs ● SATA SSDs (2.5-inch SSD in a 3.5-inch tray) <p>3.5-inch non-hot-swap drives:</p> <ul style="list-style-type: none"> ● NL SATA HDDs <p>Intermix of SAS/NL SAS and SATA HDDs and SSDs is supported within a system, but not within a RAID array.</p>
Maximum internal storage	<p>2.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> ● Up to 8 TB with 8x 1 TB NL SATA HDDs ● Up to 7.2 TB with 8x 900 GB SAS HDDs ● Up to 2.4 TB with 4x 600 GB SATA SSDs <p>3.5-inch hot-swap drives:</p> <ul style="list-style-type: none"> ● Up to 48 TB with 8x 6 TB NL SATA HDDs ● Up to 32 TB with 8x 4 TB NL SAS HDDs ● Up to 4.8 TB with 8x 600 GB SAS HDDs ● Up to 2.4 TB with 4x 600 GB SATA SSDs <p>3.5-inch non-hot-swap drives:</p> <ul style="list-style-type: none"> ● Up to 24 TB with 4x 6 TB NL SATA HDDs
RAID support	<ul style="list-style-type: none"> ● Non-RAID with the integrated SATA controller or 8885e adapter. ● RAID 0, 1, 10, and 5 with ThinkServer RAID 100. ● RAID 0, 1, 10 with ThinkServer RAID 500. Optional RAID 5, 50 upgrade. ● RAID 0, 1, 10, 5, 50, 6 with ThinkServer RAID 700.
Optical drive bays	Two without a backup drive or one with a backup drive. Support for DVD-ROM or DVD-RW.
Backup drive bays	One. Support for RDX backup drive.
Network interfaces	One integrated Gigabit Ethernet (10/100/1000 Mbps) RJ-45 port (Intel I217LM): Ashared port for management and data.

Components	Specification
I/O expansion slots	<ul style="list-style-type: none"> Slot 1: PCIe 3.0 x16 (x16-wired); full-height, full-length Slot 2: PCIe 2.0 x1 (x1-wired); full-height, half-length Slot 3: PCIe 2.0 x16 (x4-wired); full-height, half-length Slot 4: PCI 32 bit / 33 MHz (5 V); full-height, half-length
Ports	<ul style="list-style-type: none"> Front: 2x USB 3.0 ports. Rear: 4x USB 3.0 ports, 2x USB 2.0 ports, 1x DB-15 VGA port, 1x DB-9 serial port, 1x RJ-45 GbE network port.
Cooling	Four fixed system fans with Intelligent Cooling Engine (ICE).
Power supply	<ul style="list-style-type: none"> One fixed 450 W AC (100 - 240 V) power supply (80 PLUS Gold) (select models) Up to two redundant hot-swap 450 W AC (100 - 240 V) power supplies (select models).
Hot-swap parts	HDDs and SSDs (select models), power supplies (select models).
Systems management	UEFI, system LEDs, ThinkServer EasyStartup, ThinkServer EasyUpdate, ThinkServer Power Planner, ThinkServer Diagnostics, Intel Active Management Technology (AMT) 9.0.
Security features	Power-on password, administrator's password, Intrusion Switch (select models), Trusted Platform Module (TPM) (select models), lockable front door, security lock slot, and padlock loop.
Video	<ul style="list-style-type: none"> Intel HD Graphics integrated into a processor (select models). NVS 315 Graphic Adapter by NVIDIA (select models). <p>Maximum resolution is 1920x1080 at 60 Hz with 32 bits per pixel (16M colors).</p>
Operating systems	Microsoft Windows 7, 8, and 8.1; Microsoft Windows Server 2008 R2, 2012, 2012 R2, and 2016; Red Hat Enterprise Linux (RHEL) Server 6 and 7; SUSE Linux Enterprise Server (SLES) 11; VMware vSphere (ESXi) 5.1 and 5.5; Citrix XenServer 6.2.
Warranty	One-year or three-year (model dependent) customer-replaceable unit (CRU) and on-site limited warranty with 9x5 next business day (NBD).
Service and support	Optional service upgrades (country-specific) are available through Lenovo Services offerings: 8-hour or 4-hour response time, warranty extension up to 5 years, Priority Technical Support, and Keep Your Drive Multi-Drive.
Dimensions	Height: 430 mm (16.9 in.), width: 195 mm (7.7 in.), depth: 595 mm (23.4 in.)
Weight	Minimum: 19.0 kg (41.9 lb); maximum: 28.0 kg (61.7 lb)

Relationship models

TS440 relationship models are region-specific; that is, each region may define their own server models, and not all server models are available in every region.

For a list of the TS440 relationship models (Machine Types 70AL and 70AM), refer to the TS440 PSREF webpage (http://psref.lenovo.com/Product/ThinkServer_TS440) or contact a Lenovo or Lenovo Business Partner representative in your region.

Product availability: Relationship models of the ThinkServer TS440 are withdrawn and no longer available for ordering.

Note: TS440 server models are available in North America (United States and Canada); Latin America (Argentina, Chile); select Europe, Middle East, Africa (EMEA); and Asia Pacific (Australia, Japan).

The TS440 server models are shipped with the following items:

- *Read Me First* printed publication
- Documentation DVD containing the *TS440 User's Guide*
- ThinkServer EasyStartup software DVD
- One (fixed power supply models) or two (hot-swap power supply models) line cords

TopSeller models

TS440 TopSeller models are region-specific; that is, each region may define their own server models, and not all server models are available in every region.

For a list of the TS440 TopSeller models (Machine Types 70AN and 70AQ), refer to the TS440 PSREF webpage (http://psref.lenovo.com/Product/ThinkServer_TS440) or contact a Lenovo or Lenovo Business Partner representative in your region.

Product availability: TopSeller models of the ThinkServer TS440 are withdrawn and no longer available for ordering.

Note: TS440 server models are available in North America (United States and Canada); Latin America (Argentina, Chile); select Europe, Middle East, Africa (EMEA) regions; and Asia Pacific (Australia, Japan).

The TS440 server models are shipped with the following items:

- *Read Me First* printed publication
- Documentation DVD containing the *TS440 User's Guide*
- ThinkServer EasyStartup software DVD
- One (fixed power supply models) or two (hot-swap power supply models) line cords

Processors

The TS440 supports one processor. The following table lists the specifications of the processors that are available for the TS440 server.

Table 2. Processor specifications (Hyper-Threading [HT], Turbo Boost [TB], Virtualization Technology [VT])

Processor model	Core frequency (Base / TB Max)	Cores / threads	Cache	Max DDR3 frequency	TDP	HT	TB	VT-x	VT-d	IG#	Mgt*
Intel Xeon processors											
E3-1220 v3	3.1 / 3.5 GHz	4 / 4	8 MB	1600 MHz	80 W	No	Yes	Yes	Yes	No	AMT
E3-1225 v3	3.2 / 3.6 GHz	4 / 4	8 MB	1600 MHz	84 W	No	Yes	Yes	Yes	Yes	AMT
E3-1226 v3	3.3 / 3.7 GHz	4 / 4	8 MB	1600 MHz	84 W	No	Yes	Yes	Yes	Yes	AMT
E3-1230 v3	3.3 / 3.7 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1231 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1240 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1241 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1245 v3	3.4 / 3.8 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1246 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1270 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1271 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	80 W	Yes	Yes	Yes	Yes	No	AMT
E3-1275 v3	3.5 / 3.9 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1276 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1280 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	82 W	Yes	Yes	Yes	Yes	No	AMT
E3-1281 v3	3.7 / 4.1 GHz	4 / 8	8 MB	1600 MHz	82 W	Yes	Yes	Yes	Yes	No	AMT
E3-1285 v3	3.6 / 4 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1286 v3	3.7 / 4.1 GHz	4 / 8	8 MB	1600 MHz	84 W	Yes	Yes	Yes	Yes	Yes	AMT
E3-1286L v3	3.2 / 4 GHz	4 / 8	8 MB	1600 MHz	65 W	Yes	Yes	Yes	Yes	Yes	AMT

* Mgt = Management

IG = Intel Integrated HD Graphics

Memory

Lenovo DDR3 memory is compatibility tested and tuned for optimal ThinkServer performance and throughput. From a service and support standpoint, Lenovo memory automatically assumes the system warranty, and Lenovo provides service and support worldwide.

The TS440 server has four DIMM slots, and it supports DDR3 UDIMMs with ECC memory protection. The processor has two memory channels and supports two DIMMs per channel.

The following rules apply when selecting the memory configuration:

- The TS440 server supports memory configurations with 1, 2, 3, or 4 UDIMMs.
- The TS440 server supports up to 1600 MHz memory speeds for one DIMM per channel and two DIMMs per channel configurations, provided that the processors support this memory speed (see the Processor options table in the Processors section for details).

The following table summarizes memory speeds and capacities that are supported by the TS440 server.

Table 3. TS440 maximum memory speeds and capacities

DIMMs per channel	UDIMM	
	Memory bus speed	Maximum capacity
1 DPC	1600 MHz	16 GB (2x 8 GB)
2 DPC	1600 MHz	32 GB (4x 8 GB)

The following table lists the memory options that are available for the TS440 server.

Table 4. Memory options

Description	Part number	Maximum supported
ThinkServer 4GB DDR3L-1600MHz (1Rx8) ECC UDIMM	0C19499	4
ThinkServer 8GB DDR3L-1600MHz (2Rx8) ECC UDIMM	0C19500	4

Internal storage

The TS440 server supports the following internal storage configurations:

1. 4x 3.5-inch non-hot-swap drive bays + optical drive bay + optical or backup drive bay
2. 4x 3.5-inch + 4x 3.5-inch hot-swap drive bays + optical drive bay + optical or backup drive bay
3. 8x 2.5-inch hot-swap drive bays + optical drive bay + optical or backup drive bay

These configurations are shown in the following figure.

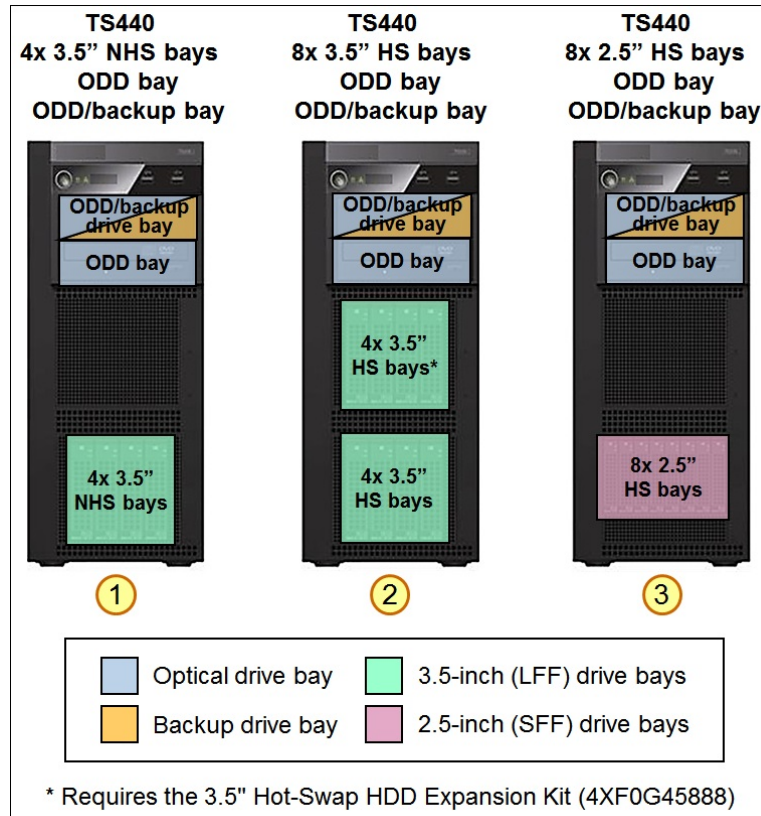


Figure 5. Internal storage configurations

The following table lists the internal storage expansion options that are available for the TS440 server.

Table 5. Internal storage expansion options

Description	Part number	Maximum supported
ThinkServer 3.5" Hot-Swap HDD Expansion Kit for Tower	4XF0G45888	1

Configuration note: The ThinkServer 3.5" Hot-Swap HDD Expansion Kit for Tower adds 4x 3.5-inch hot-swap drive bays to the TS440 models with 4x 3.5-inch hot-swap drive bays for a total of eight drive bays.

Controllers for internal storage

The following table lists the internal RAID controllers, HBAs, and the additional options that are used for the internal disk storage of the TS440 server.

Table 6. Controllers for internal storage

Description	Part number	Maximum supported
ThinkServer RAID 100 Controller	None#	1
ThinkServer RAID 500 Adapter II	0A89464	1
ThinkServer RAID 500 RAID 5 Upgrade	4XC0G88835	1*
ThinkServer RAID 700 Adapter II	0A89463	1
ThinkServer RAID 700 Battery	67Y2647	1†
ThinkServer 8885e PCIe 12Gb SAS Adapter by PMC	4XB0G88714	1

RAID 100 is an onboard hardware-assist RAID controller.
 * RAID 5 upgrade key for RAID 500 Adapter (0A89464).
 † Battery backup upgrade for RAID 700 Adapter (0A89463).

ThinkServer RAID 100 is an onboard RAID controller that does *not* consume a PCIe slot. The RAID 500, RAID 700, and 8885e adapters are supported only in the PCIe 3.0 x16 expansion slot.

Configuration notes:

- If the RAID 500 adapter is used in the server, the RAID 700 and 8885e adapters cannot be used.
- If the RAID 700 adapter is used in the server, the RAID 500 and 8885e adapters cannot be used.
- If the 8885e adapter is used in the server, the RAID 500 and RAID 700 adapters cannot be used.

Important: The RAID 100 controller is not supported by virtualization hypervisors, including VMware vSphere (ESXi), Linux KVM, Xen, and Microsoft Hyper-V.

The following table summarizes features of supported internal storage controllers.

Table 7. Internal storage controller features and specifications summary

Feature	RAID 100	RAID 500	RAID 700	8885e***
Part number	None	0A89464	0A89463	4XB0G88714
Form factor	Onboard	Low profile	Low profile	Low profile
Controller chip	Not applicable*	LSI SAS2008	LSI SAS2108	PMC PM8063
Host interface	Not applicable*	PCIe 2.0 x8	PCIe 2.0 x8	PCIe 3.0 x8
Port interface	6 Gbps SATA	6 Gbps SAS	6 Gbps SAS	12 Gbps SAS
Number of internal drive ports	5**	8	8	8
Internal port connectors	5x L-shape SATA	2x Mini-SAS (SFF-8087)	2x Mini-SAS (SFF-8087)	2x Mini-SAS HD (SFF-8643)
Drive interface	SATA	SAS, SATA	SAS, SATA	SAS, SATA
Drive type	HDD, SSD	HDD, SSD	HDD, SSD	HDD, SSD
Maximum number of drives	4	8	8	8
RAID levels	0/1/10/5	0/1/10, Optional 5/50 (4XC0G88835)	0/1/10/5/50/6	None
JBOD mode	Yes	Yes	No	Yes
Cache	None	None	512 MB	1,024 MB

Feature	RAID 100	RAID 500	RAID 700	8885e***
Cache protection	None	None	Optional battery backup (67Y2647)	None
FastPath	None	None	None	None
CacheCade Pro 2.0	None	None	None	None

* RAID 100 is a hardware-assist, software RAID feature (Intel Rapid Storage Technology Enterprise [RSTe]) integrated into the Intel C226 Platform Controller Hub (PCH).

** Four internal ports are used for SATA HDDs or SSDs, and the remaining port is used for an optical drive.

*** In addition to eight internal ports, the ThinkServer 8885e adapter has eight external ports for external storage expansion connectivity (For details, refer to the External storage adapters section).

The following table lists drive types and internal drive bay configurations that are supported by the internal RAID controllers and HBAs.

Table 8. RAID controllers and HBAs, drive types, and internal drive bays

Storage controller	Drive type	4x 3.5-in. non-hot-swap	4x 3.5-in. hot-swap	8x 3.5-in. hot-swap	8x 2.5-in. hot-swap
RAID 100	SAS HDD	No support	No support	No support	No support
	NL SAS HDD	No support	No support	No support	No support
	NL SATA HDD	Yes	Yes	No support	No support
	SATA SSD	Not available*	Yes	No support	No support
RAID 500	SAS HDD	No support	Yes	Yes	Yes
	NL SAS HDD	No support	Yes	Yes	Yes
	NL SATA HDD	No support	Yes	Yes	Yes
	SATA SSD	No support	Yes	Yes (Max 4)**	Yes (Max 4)**
RAID 700	SAS HDD	No support	Yes	Yes	Yes
	NL SAS HDD	No support	Yes	Yes	Yes
	NL SATA HDD	No support	Yes	Yes	Yes
	SATA SSD	No support	Yes	Yes (Max 4)**	Yes (Max 4)**
8885e HBA	SAS HDD	No support	Yes	Yes	Yes
	NL SAS HDD	No support	Yes	Yes	Yes
	NL SATA HDD	No support	Yes	Yes	Yes
	SATA SSD	No support	Yes	Yes (Max 4)**	Yes (Max 4)**

* There are no 3.5-inch non-hot-swap SSDs available for the TS440 server.

** Up to four SSDs is supported in the TS440 server.

Drives for internal storage

The TS440 server supports the internal drive options listed in the following tables.

Table 9. Internal storage: 3.5-inch non-hot-swap drives

Description	Part number	Maximum supported
3.5-inch non-hot-swap HDDs - NL SATA 6 Gbps		
ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19501	4
ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19502	4
ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19503	4
ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19504	4
ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hard Drive	0C19505	4
ThinkServer 3.5" 6TB 7.2K Enterprise SATA 6Gbps Hard Drive	4XB0G88749	4

Table 10. Internal storage: 3.5-inch hot-swap drives

Description	Part number	Maximum supported
3.5-inch hot-swap HDDs - SAS 6 Gbps		
ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive	67Y2616	8
ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive	4XB0F28644	8
3.5-inch hot-swap HDDs - NL SAS 6 Gbps		
ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19530	8
ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19531	8
ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19532	8
ThinkServer 3.5" 4TB 7.2K SAS 6Gbps Hot Swap Hard Drive	4XB0F28635	8
3.5-inch hot-swap HDDs - NL SATA 6 Gbps		
ThinkServer 3.5" 1TB 7.2K Enterprise 6Gbps SATA Hot Swap Hard Drive	0A89474	8
ThinkServer 3.5" 2TB 7.2K Enterprise 6Gbps SATA Hot Swap Hard Drive	0A89475	8
ThinkServer 3.5" 3TB 7.2K Enterprise 6Gbps SATA Hot Swap Hard Drive	0A89477	8
ThinkServer 3.5" 4TB 7.2K Enterprise 6Gbps SATA Hot Swap Hard Drive	0C19520	8
ThinkServer 3.5" 6TB 7.2K Enterprise 6Gbps SATA Hot Swap Hard Drive	4XB0G88750	8
2.5-inch hot-swap SSDs (2.5-inch SSDs in 3.5-inch drive trays) - SATA 6 Gbps		
ThinkServer 2.5" 120GB Value Read-Optimized SATA 6Gbps HS SSD with 3.5" Tray	4XB0F28622	4
ThinkServer 2.5" 240GB Value Read-Optimized SATA 6Gbps HS SSD with 3.5" Tray	4XB0F28623	4
ThinkServer 2.5" 300GB Value Read-Optimized SATA 6Gbps HS SSD with 3.5" Tray	4XB0G88718	4
ThinkServer 2.5" 480GB Value Read-Optimized SATA 6Gbps HS SSD with 3.5" Tray	4XB0F28624	4

Table 11. Internal storage: 2.5-inch hot-swap drives

Description	Part number	Maximum supported
2.5-inch hot-swap HDDs - SAS 6 Gbps		
ThinkServer 2.5" 146GB 15K SAS 6Gbps Hot Swap Hard Drive	0C19493	8
ThinkServer 2.5" 300GB 10K SAS 6Gbps Hot Swap Hard Drive	67Y2619	8
ThinkServer 2.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive	0C19494	8
ThinkServer 2.5" 600GB 10K SAS 6Gbps Hot Swap Hard Drive	67Y2621	8
ThinkServer 2.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive	4XB0F28642	8
ThinkServer 2.5" 900GB 10K SAS 6Gbps Hot Swap Hard Drive	0A89409	8
2.5-inch hot-swap HDDs - NL SATA 6 Gbps		
ThinkServer 500GB 7.2K 2.5" Enterprise 6Gbps SATA Hot Swap Hard Drive	0C19495	8
ThinkServer 1TB 7.2K 2.5" Enterprise 6Gbps SATA Hot Swap Hard Drive	0C19496	8
2.5-inch hot-swap SSDs - SATA 6 Gbps		
ThinkServer 2.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28615	4
ThinkServer 2.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28616	4
ThinkServer 2.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0G88716	4
ThinkServer 2.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28617	4

Optical drives

The TS440 server supports the optical drive options listed in the following table.

Table 12. Optical drive options

Description	Part number	Maximum supported
ThinkServer Half High SATA DVD-RW Optical Disk Drive	None*	2
ThinkServer Half High SATA DVD-ROM Optical Disk Drive	None*	2

* Optical drives are included in select Relationship and TopSeller models and can be configured for custom (Configure-to-Order and Special Bid) models.

The SATA Optical Disk Drives support the following types of media: CD-R, CD-ROM, CD-RW, DVD-R, DVD-R (dual-layer recording), DVD-RAM, DVD-RW, DVD+R, DVD+R (dual-layer recording), and DVD+RW.

Configuration notes:

- If two optical drives are used, an internal backup unit is not supported.
- Two optical drive are supported only when the RAID 500, RAID 700, or 8885e adapters are used for internal storage. If the RAID 100 controller is used, the maximum number of optical drives in the server is limited to one.

Internal backup units

The TS440 server supports the internal backup unit options listed in the following table.

Table 13. Internal backup unit options

Description	Part number	Maximum supported
Internal RDX backup unit (USB)		
ThinkServer Internal RDX Tape Drive	4XF0F28769	1
Cartridges for RDX backup unit		
ThinkServer 1TB SATA 3Gbps RDX Cartridge	4XB0F28660	1
ThinkServer 2TB SATA 3Gbps RDX Cartridge	4XB0G88711	1

Configuration note: If an internal backup unit is used, a maximum of one optical drive is supported.

I/O expansion

The TS440 server has four I/O expansion slots:

- Slot 1: PCIe 3.0 x16 (x16-wired); full-height, full-length
- Slot 2: PCIe 2.0 x1 (x1-wired); full-height, half-length
- Slot 3: PCIe 2.0 x16 (x4-wired); full-height, half-length
- Slot 4: PCI 32 bit / 33 MHz (5 V); full-height, half-length

The following adapter types are supported:

- RAID adapters (Refer to the Controllers for internal storage and External storage adapters sections)
- Network adapters (Refer to the Network adapters section)
- Host bus adapters (Refer to the External storage adapters section)
- Serial and parallel port adapters (Refer to the following table)

The TS440 server supports the serial and parallel port adapter options that are listed in the following table.

Table 14. Serial and parallel port adapter options

Description	Part number	Maximum supported
PCIe adapters		
ThinkServer Dual Serial Port PCIe Adapter	0C19511	3
PCI adapters		
ThinkServer Single Parallel Port PCI Adapter	0C19508	1
ThinkServer Single Serial Port PCI Adapter	0C19509	1
ThinkServer Dual Serial Port PCI Adapter	0C19510	1

Network adapters

The TS440 server has one integrated Gigabit Ethernet port that is based on the Intel I217LM NIC (a shared port for operating system access and management network).

The onboard NIC has the following features:

- 1 Gb Ethernet IEEE 802.3, 802.3u, and 802.3ab PHY specifications compliant
- Integrated PHY for 10/100/1000 Mbps with speed and duplex auto-negotiation
- Energy Efficient Ethernet (IEEE 802.3az)
- Wake on LAN
- VLAN tagging (IEEE 802.1Q)
- Class of Service (CoS) priority (IEEE 802.1p) marking
- TCP/UDP checksum and segmentation offload (IPv4 and IPv6)
- Receive Side Scaling
- Jumbo Frames (up to 9K)
- Timing and Synchronization (IEEE 802.1as / IEEE 1588)
- Load balancing and failover teaming support:
 - Adapter fault tolerance (AFT)
 - Switch fault tolerance (SFT)
 - Adaptive load balancing (ALB)

Important: The onboard I217LM GbE port does not support VMware vSphere (ESXi).

The following table lists the network adapter options for the TS440 server.

Table 15. Network adapter options

Description	Part number	Maximum supported
ThinkServer CT2 1Gbps Single Port Base-T Ethernet Adapter by Intel (1x RJ-45 port)	4XC0F28725	3
ThinkServer 1Gbps Ethernet I350-T2 Server Adapter by Intel (2x RJ-45 ports)	0C19506	2
ThinkServer 1Gbps Ethernet I350-T4 Server Adapter by Intel (4x RJ-45 ports)	0C19507	2

External storage adapters

The following table lists the RAID adapter and HBA options that can be used for external storage attachments.

Table 16. RAID adapter and HBA options for external storage

Description	Part number	Maximum supported
RAID adapters - 6 Gb SAS		
ThinkServer 9280-8e 6Gb 8-port RAID Adapter by LSI (2x external Mini-SAS SFF-8088 connectors)	4XB0F28645	1
ThinkServer 9286CV-8e 6Gb SAS RAID Adapter by LSI (2x external Mini-SAS SFF-8088 connectors)	4XB0F28646	1
Options for RAID adapters		
ThinkServer RAID 700 Battery (optional battery for 4XB0F28645)	67Y2647	1
Host bus adapters - 12 Gb SAS		
ThinkServer 8885e PCIe 12Gb SAS Adapter by PMC (2x external Mini-SAS HD SFF-8644 connectors)	4XB0G88714	1

Configuration notes:

- Up to one adapter for external storage is supported in the server; that is, you can select only one of the adapters that are shown in the preceding table, if needed.
- If the RAID 500 or RAID 700 PCIe adapters are used in the server, the 8885e HBA cannot be used.

The following table summarizes features of supported SAS storage controllers.

Table 17. Drive controller features and specifications summary

Feature	9280-8e	9286CV-8e	8885e*
Part number	4XB0F28645	4XB0F28646	4XB0G88714
Form factor	Low profile	Low profile	Low profile
Controller chip	LSI SAS2108	LSI SAS2208	PMC PM8063
Host interface	PCIe 2.0 x8	PCIe 3.0 x8	PCIe 3.0 x8
Port interface	6 Gbps SAS	6 Gbps SAS	12 Gbps SAS
Number of external ports	8	8	8
External port connectors	2x Mini-SAS (SFF-8088)	2x Mini-SAS (SFF-8088)	2x Mini-SAS HD (SFF-8644)
Drive interface	SAS, SATA	SAS, SATA	SAS, SATA
Drive type	HDD, SSD	HDD, SSD	HDD, SSD
Maximum number of devices	240	240	256
RAID levels	0/1/10/5/50/6/60	0/1/10/5/50/6/60	None
JBOD mode	No	No	Yes
Cache	512 MB	1 GB	1 GB
Cache protection	Optional battery backup (67Y2647)	CacheVault flash backup (included)	None
FastPath	None	Included	None
CacheCade Pro 2.0	None	None**	None

* In addition to eight external ports, the ThinkServer 8885e adapter has eight internal ports for internal storage connectivity (For details, refer to the Controllers for internal storage section).

** The CacheCade Pro 2.0 feature is not supported by the 9286CV-8e RAID controller when it is installed in the TS440 server.

GPU adapters

The TS440 server supports the GPU adapter options that are listed in the following table.

Note: A GPU adapter must be configured for server models that use processors without integrated graphics; a GPU adapter is optional for server models that use processors with integrated graphics.

Table 18. GPU adapter options

Description	Part number	Maximum supported
ThinkServer 1GB NVS 315 PCIe x16 Graphic Adapter by NVIDIA	4X60G88210	1

Power supplies

The TS440 server supports one 450 W AC (100-240 V) fixed power supply (80 PLUS Gold) or up to two redundant hot-swap 450 W AC (100-240 V) power supplies. One (fixed power supply models) or two (hot-swap power supply models) line cords are included with the server.

The following table lists the hot-swap power supply options.

Table 19. Hot-swap power supply options

Description	Part number	Maximum supported
ThinkServer 450W Hot Swap Redundant Power Supply	67Y2625	2

Systems management

The ThinkServer TS440 supports Intel Active Management Technology (AMT) which provides out-of-band, hardware-based advanced system control, monitoring, alerting, and remote presence functions.

AMT offers the following features:

- Out-of-band management
- System health and status monitoring
- System event log and alerting
- Hardware inventory
- Boot device selection
- Remote power control
- Serial over LAN
- IDE Redirect for mounting remote media

In addition, AMT supports KVM (keyboard, video, mouse) redirection (KVM redirection requires an Intel Xeon E3-1200 v3 processor with integrated graphics).

Important: Health monitoring, event log, alerts, hardware inventory, boot device selection, and remote power control features are accessible out-of-band with a web browser. Serial over LAN, IDE Redirect, and KVM redirection features require third-party tools that are not supplied or supported by Lenovo.

AMT operates independently of the server and remains operational even if the server is powered off. Out-of-band management is performed through the Ethernet port 0, which is a shared port for data and management.

AMT supports the following management protocols:

- DASH 1.1
- WS-MAN
- SNMP Platform Event Traps (PET)

AMT supports the following management user interfaces:

- Web browser
- A third-party platform management software, including but not limited to the following tools:
 - RealVNC Viewer Plus (for remote KVM)
 - Intel Platform Solution Manager (for comprehensive support of AMT features)

Lenovo offers the following software tools that can help you set up, use, and maintain the server at no additional cost:

- ThinkServer EasyStartup
The ThinkServer EasyStartup tool simplifies the process of configuring RAID and installing supported Microsoft Windows and Linux operating systems, VMware hypervisors, and device drivers on a ThinkServer system.

- ThinkServer EasyUpdate
The ThinkServer EasyUpdate firmware update tool enables you to maintain your server firmware up-to-date and helps you avoid unnecessary server outages.
- ThinkServer Diagnostics
The ThinkServer Diagnostics software speeds up troubleshooting tasks to reduce service time.

Rack installation

The ThinkServer TS440 can be mounted in a rack cabinet by using the tower to rack conversion kit that is listed in the following table. The tower to rack conversion kit includes a shelf on which the server is placed, sliding rails for mounting a shelf, and a cable management arm (CMA).

Table 20. Rack installation options

Description	Part number	Maximum supported
ThinkServer Tower to Rack Shelf Conversion Kit	0C19515	1

Operating systems

The ThinkServer TS440 supports the following operating systems:

- Microsoft (client operating systems)
 - Windows 7 Ultimate (x86 and x64) SP1
 - Windows 7 Professional (x86 and x64) SP1
 - Windows 8 (x86 and x64)
 - Windows 8 Professional (x86 and x64)
 - Windows 8.1 (x86 and x64)
- Microsoft (server operating systems)
 - Windows Server 2008 R2 x64 SP1 Foundation
 - Windows Server 2008 R2 x64 SP1 Standard (including Hyper-V)
 - Windows Server 2008 R2 x64 SP1 Enterprise (including Hyper-V)
 - Windows Server 2008 R2 x64 SP1 Datacenter (including Hyper-V)
 - Windows Small Business Server 2011 Essentials
 - Windows Small Business Server 2011 Standard
 - Windows Small Business Server 2011 Premium Add-on (including Hyper-V)
 - Windows Multipoint Server 2011
 - Windows Server 2012 Foundation
 - Windows Server 2012 Essentials
 - Windows Server 2012 Standard (including Hyper-V)
 - Windows Server 2012 Datacenter (including Hyper-V)
 - Windows Storage Server 2012 Standard
 - Windows Server 2012 R2 Foundation
 - Windows Server 2012 R2 Essentials
 - Windows Server 2012 R2 Standard (including Hyper-V)
 - Windows Server 2012 R2 Datacenter (including Hyper-V)
 - Hyper-V Server 2012 R2
 - Windows Storage Server 2012 R2 Standard
 - Windows Server 2016
- SUSE
 - SUSE Linux Enterprise Server 11 SP2 (x86 and x64)
 - SUSE Linux Enterprise Server 11 SP3 (x86 and x64)

- Red Hat
 - Red Hat Enterprise Linux Server 6.4 (x86 and x64)
 - Red Hat Enterprise Linux Server 6.5 (x86 and x64)
 - Red Hat Enterprise Linux Server 6.8 (x86 and x64)
 - Red Hat Enterprise Linux Server 7.0
 - Red Hat Enterprise Linux Server 7.1
 - Red Hat Enterprise Linux Server 7.2
- VMware
 - VMware ESXi 5.1 U1
 - VMware ESXi 5.1 U2
 - VMware ESXi 5.1 U3
 - VMware ESXi 5.5
 - VMware ESXi 5.5 U1
 - VMware ESXi 5.5 U2
 - VMware ESXi 5.5 U3
- Citrix
 - XenServer 6.2

Important: VMware ESXi support requires an Intel Xeon E3-1200 v3 processor and a PCIe RAID adapter. The onboard RAID 100 adapter and the shared GbE port (I217LM) are not supported by VMware ESXi.

For the latest information about the specific versions and service levels that are supported and any other prerequisites, see the Operating System Interoperability Guide: <http://lenovopress.com/redposig>.

Physical specifications

The TS440 has the following dimensions and weight (approximate):

- Height:
 - Without foot stands: 430 mm (16.9 in.)
 - With foot stands: 445 mm (17.5 in.)
- Width: 195 mm (7.7 in.)
- Depth: 595 mm (23.4 in.) including the front bezel
- Weight:
 - Minimum: 19.0 kg (41.9 lb)
 - Maximum: 28 kg (61.7 lb)

Operating environment

The TS440 server is supported in the following environment:

- Air temperature:
 - Operating: 10 °C - 35 °C (50 °F - 95 °F)
 - Storage: -40 °C - 70 °C (-40 °F - 158 °F) in the original shipping package
- Altitude: 0 m - 3,048 m (0 ft - 10,000 ft) in an unpressurized environment
- Humidity:
 - Operating: 10% - 80% (non-condensing)
 - Storage: 10% - 90% (non-condensing)
- Electrical:
 - 100 - 127 (nominal) V AC; 50 Hz or 60 Hz
 - 200 - 240 (nominal) V AC; 50 Hz or 60 Hz

Regulatory compliance

The TS440 server conforms to the following regulations:

- RoHS
- FCC - Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, Class A
- EU Council Directive 2004/108/EC
- European Standard EN55022, Class A
- Korea Class A compliance
- Taiwan Class A compliance
- Japan VCCI, Class A

Warranty

The ThinkServer TS440 has a three-year or one-year warranty (model dependent) with 24x7 standard call center support and 9x5 next business day onsite coverage. Lenovo offers warranty maintenance upgrades and post-warranty maintenance agreements with a well-defined scope of services, including service hours, response time, and length of service coverage.

The Lenovo QuickPick tool helps locate compatible accessories and services and warranty information. Services offered may vary by geographic location. Access the tool via the following URL:

<http://lenovoquickpick.com>

The following table explains warranty service definitions in more detail.

Table 21. Warranty service definitions

Term	Description
On-site service	A service technician will go to the client's location for equipment service.
24x7x4 hour	A service technician is scheduled to arrive at the client's location within four hours after remote problem determination is completed. Lenovo provides service around the clock, every day, including Lenovo holidays.
24x7x8 hour	A service technician is scheduled to arrive at the client's location within eight hours after remote problem determination is completed. Lenovo provides service around the clock, every day, including Lenovo holidays.
9x5x4 hour	A service technician is scheduled to arrive at the client's location within four business hours after remote problem determination is completed. Lenovo provides service 8:00 am - 5:00 pm in the client's local time zone, Monday-Friday, excluding Lenovo holidays. For example, if a customer reports an incident at 3:00 pm on Friday, the technician will arrive by 10:00 am the following Monday.
9x5 next business day	A service technician is scheduled to arrive at the client's location on the business day after remote problem determination is completed. Lenovo provides service 8:00 am - 5:00 pm in the client's local time zone, Monday - Friday, excluding Lenovo holidays. Calls received after 4:00 pm local time require an extra business day for service dispatch.

The following Lenovo warranty service upgrades are available:

- Warranty and maintenance service upgrades:
 - Three, four, or five years of 9x5 or 24x7 service coverage
 - Onsite response time from next business day to 4 hour same-day
 - Warranty extension of up to 5 years
 - Post warranty extensions offered in 1-year increments

- **Priority Technical Support**
Lenovo's Priority Support Offering enhances our award-winning call center support to provide top priority queue assignment to specialized Lenovo technicians. Priority support accelerates call center troubleshooting to get your problems resolved quickly, and includes other value-added support for Lenovo provided software tools. Priority support can be purchased stand alone to match the base warranty of your system or in convenient bundles with our same-day response services.
- **Keep Your Drive Multi-Drive**
Lenovo's Keep Your Drive Multi-Drive service is a multi-drive hard drive retention offering that ensures your data is always under your control, regardless of the number of hard drives that are installed in your Lenovo server. In the unlikely event of a hard drive failure, you retain possession of your hard drive while Lenovo replaces the failed drive part. Your data stays safely on your premises, in your hands. Keep Your Drive Multi-Drive covers multiple drives and multiple failures with one service offering at one value price. This service can be purchased stand-alone to match the base warranty of your system or in convenient bundles with our same-day response services.

External storage expansion enclosures

The following table lists the external storage expansion enclosures that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 22. External storage expansion enclosures

Description	Part number
Lenovo Storage E1012 LFF Disk Expansion Single SAS IO Module, Rail Kit, 9x5 NBD	64111B1
Lenovo Storage E1012 LFF Disk Expansion Dual SAS IO Module, Rail Kit, 9x5 NBD	64111B2
Lenovo Storage E1024 SFF Disk Expansion Single SAS IO Module, Rail Kit, 9x5 NBD	64111B3
Lenovo Storage E1024 SFF Disk Expansion Dual SAS IO Module, Rail Kit, 9x5 NBD	64111B4

For details about supported RAID controllers and HBAs, drives, and cables, see the Lenovo Storage E1012 and E1024 Product Guide:

<http://lenovopress.com/lp0043>

External storage systems

The TS440 server can be attached to external NAS storage via 1 Gb Ethernet network, or SAN storage systems via 1 Gb iSCSI with an iSCSI software initiator in the operating system. The following table lists the external storage systems that are offered by Lenovo and support 1 Gb Ethernet NAS or 1 Gb iSCSI connectivity.

Table 23. External storage systems

Description	Part number
Lenovo N Series (NAS connectivity)	
Lenovo Storage N3310	70FX / 70FY*
Lenovo Storage N4610	70G0 / 70G1*
Lenovo Storage S Series (iSCSI connectivity)	
Lenovo Storage S2200 LFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64114B1
Lenovo Storage S2200 LFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64114B2
Lenovo Storage S2200 SFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64114B3
Lenovo Storage S2200 SFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64114B4
Lenovo Storage S3200 LFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64116B1

Description	Part number
Lenovo Storage S3200 LFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64116B2
Lenovo Storage S3200 SFF Chassis FC/iSCSI Single Controller, Rack Kit, 9x5NBD	64116B3
Lenovo Storage S3200 SFF Chassis FC/iSCSI Dual Controller, Rack Kit, 9x5NBD	64116B4
Lenovo Storage V Series (iSCSI connectivity)	
Lenovo Storage V3700 V2 LFF Control Enclosure	6535C1D
Lenovo Storage V3700 V2 LFF Control Enclosure (Top Seller)	6535EC1
Lenovo Storage V3700 V2 SFF Control Enclosure	6535C2D
Lenovo Storage V3700 V2 SFF Control Enclosure (Top Seller)	6535EC2
Lenovo Storage V3700 V2 XP LFF Control Enclosure	6535C3D
Lenovo Storage V3700 V2 XP LFF Control Enclosure (Top Seller)	6535EC3
Lenovo Storage V3700 V2 XP SFF Control Enclosure	6535C4D
Lenovo Storage V3700 V2 XP SFF Control Enclosure (Top Seller)	6535EC4
Lenovo Storage V5030 LFF Control Enclosure 3Yr S&S	6536C12
Lenovo Storage V5030 LFF Control Enclosure 5Yr S&S	6536C32
Lenovo Storage V5030 SFF Control Enclosure 3Yr S&S	6536C22
Lenovo Storage V5030 SFF Control Enclosure 5Yr S&S	6536C42
IBM Storwize for Lenovo (iSCSI connectivity)	
IBM Storwize V3500 3.5-inch Dual Control Storage Controller Unit	6096CU2**
IBM Storwize V3500 2.5-inch Dual Control Storage Controller Unit	6096CU3**
IBM Storwize V3700 3.5-inch Storage Controller Unit	6099L2C
IBM Storwize V3700 2.5-inch Storage Controller Unit	6099S2C
IBM Storwize V3700 2.5-inch DC Storage Controller Unit	6099T2C
IBM Storwize V5000 LFF Control Enclosure, w/3 Yr S&S	6194L2C†
IBM Storwize V5000 LFF Control Enclosure, w/3 Yr S&S (LA)	6194L2L‡
IBM Storwize V5000 LFF Control Enclosure, w/5 Yr S&S	61941A1†
IBM Storwize V5000 LFF Control Enclosure, w/5 Yr S&S (LA)	61941AL‡
IBM Storwize V5000 SFF Control Enclosure, w/3 Yr S&S	6194S2C†
IBM Storwize V5000 SFF Control Enclosure, w/3 Yr S&S (LA)	6194S2L‡
IBM Storwize V5000 SFF Control Enclosure, w/5 Yr S&S	61941C1†
IBM Storwize V5000 SFF Control Enclosure, w/5 Yr S&S (LA)	61941CL‡
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/3 Yr S&S	6195SC5†
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/3 Yr S&S (LA)	6195SCL‡
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/5 Yr S&S	61951F1†
IBM Storwize V7000 2.5-inch Storage Controller Unit, w/5 Yr S&S (LA)	61951FL‡

* Machine Type; see the respective Product Guide in the NAS Storage category (<http://lenovopress.com/storage/nas>) for models.

** Available only in China.

† Available worldwide except Latin America.

‡ Available only in Latin America.

For more information, see the list of Product Guides in the following categories:

- Lenovo N Series storage: <http://lenovopress.com/storage/nas>
- Lenovo S Series storage: <http://lenovopress.com/storage/san/lenovo>
- IBM storage: <http://lenovopress.com/storage/san/ibm>

External backup units

The TS440 can be connected to an external RDX backup unit via USB. The following table lists ordering information for the RDX backup unit and RDX cartridges.

Table 24. External backup units

Description	Part number
External RDX unit	
ThinkServer External RDX Tape Drive	4XF0G88929
RDX cartridges	
ThinkServer 1TB 3Gbps RDX Cartridge	4XB0F28660
ThinkServer 2TB SATA 3Gbps RDX Cartridge	4XB0G88711

For more information, see the Product Guide: <http://lenovopress.com/tips0894-rdx-usb-30>.

Top-of-rack Ethernet switches

The following table lists the top-of-rack Ethernet switches that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 25. Top-of-rack Ethernet switches

Description	Part number
1 Gb Ethernet top-of-rack switches	
Lenovo RackSwitch G7028 (Rear to Front)	7159BAX
Lenovo RackSwitch G7052 (Rear to Front)	7159CAX
Lenovo RackSwitch G8052 (Rear to Front)	7159G52

For more information, see the list of Product Guides in the Top-of-rack Switches category: <http://lenovopress.com/servers/options/switches>

Rack cabinets

The following table lists the rack cabinets that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 26. Rack cabinets

Description	Part number
11U Rack Office Enablement Kit	201886X
25U S2 Standard Rack	93072RX
25U Static S2 Standard Rack	93072PX
42U S2 Standard Rack	93074RX
42U 1100mm Enterprise V2 Dynamic Rack	93634PX
42U 1100mm Enterprise V2 Dynamic Expansion Rack	93634EX
42U 1200mm Deep Dynamic Rack	93604PX
42U 1200mm Deep Static Rack	93614PX
42U Enterprise Rack	93084PX
42U Enterprise Expansion Rack	93084EX

For more information, see the list of Product Guides in the Rack Cabinets category:
<http://lenovopress.com/servers/options/racks>

KVM switches and consoles

The following table lists the KVM switches and consoles that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 27. KVM switch and console options

Description	Part number
Consoles	
1U 18.5" Standard Console (without keyboard)	17238BX
Console keyboards	
Keyboard w/ Int. Pointing Device USB - US Eng 103P RoHS v2	46W6712
Keyboard w/ Int. Pointing Device USB - Arabic 253 RoHS v2	46W6713
Keyboard w/ Int. Pointing Device USB - Belg/UK 120 RoHS v2	46W6714
Keyboard w/ Int. Pointing Device USB - Chinese/US 467 RoHS v2	46W6715
Keyboard w/ Int. Pointing Device USB - Czech 489 RoHS v2	46W6716
Keyboard w/ Int. Pointing Device USB - Danish 159 RoHS v2	46W6717
Keyboard w/ Int. Pointing Device USB - Dutch 143 RoHS v2	46W6718
Keyboard w/ Int. Pointing Device USB - French 189 RoHS v2	46W6719
Keyboard w/ Int. Pointing Device USB - Fr/Canada 445 RoHS v2	46W6720
Keyboard w/ Int. Pointing Device USB - German 129 RoHS v2	46W6721
Keyboard w/ Int. Pointing Device USB - Greek 219 RoHS v2	46W6722
Keyboard w/ Int. Pointing Device USB - Hebrew 212 RoHS v2	46W6723
Keyboard w/ Int. Pointing Device USB - Hungarian 208 RoHS v2	46W6724
Keyboard w/ Int. Pointing Device USB - Italian 141 RoHS v2	46W6725

Description	Part number
Keyboard w/ Int. Pointing Device USB - Japanese 194 RoHS v2	46W6726
Keyboard w/ Int. Pointing Device USB - Korean 413 RoHS v2	46W6727
Keyboard w/ Int. Pointing Device USB - LA Span 171 RoHS v2	46W6728
Keyboard w/ Int. Pointing Device USB - Norwegian 155 RoHS v2	46W6729
Keyboard w/ Int. Pointing Device USB - Polish 214 RoHS v2	46W6730
Keyboard w/ Int. Pointing Device USB - Portugese 163 RoHS v2	46W6731
Keyboard w/ Int. Pointing Device USB - Russian 441 RoHS v2	46W6732
Keyboard w/ Int. Pointing Device USB - Slovak 245 RoHS v2	46W6733
Keyboard w/ Int. Pointing Device USB - Spanish 172 RoHS v2	46W6734
Keyboard w/ Int. Pointing Device USB - Swed/Finn 153 RoHS v2	46W6735
Keyboard w/ Int. Pointing Device USB - Swiss F/G 150 RoHS v2	46W6736
Keyboard w/ Int. Pointing Device USB - Thai 191 RoHS v2	46W6737
Keyboard w/ Int. Pointing Device USB - Turkish 179 RoHS v2	46W6738
Keyboard w/ Int. Pointing Device USB - UK Eng 166 RoHS v2	46W6739
Keyboard w/ Int. Pointing Device USB - US Euro 103P RoHS v2	46W6740
Keyboard w/ Int. Pointing Device USB - Slovenian 234 RoHS v2	46W6741
Console switches	
Global 4x2x32 Console Manager (GCM32)	1754D2X
Global 2x2x16 Console Manager (GCM16)	1754D1X
Local 2x16 Console Manager (LCM16)	1754A2X
Local 1x8 Console Manager (LCM8)	1754A1X
Console cables	
Single Cable USB Conversion Option (UCO)	43V6147
USB Conversion Option (4 Pack UCO)	39M2895
Virtual Media Conversion Option Gen2 (VCO2)	46M5383
Serial Conversion Option (SCO)	46M5382

For more information, see the list of Product Guides in the KVM Switches and Consoles category:
<http://lenovopress.com/servers/options/kvm>

Power distribution units

The following table lists the power distribution units (PDUs) that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 28. Power distribution units

Description	Part number
0U Basic PDUs	
0U 36 C13/6 C19 24A/200-240V 1 Phase PDU with NEMA L6-30P line cord	00YJ776
0U 36 C13/6 C19 32A/200-240V 1 Phase PDU with IEC60309 332P6 line cord	00YJ777
0U 21 C13/12 C19 32A/200-240V/346-415V 3 Phase PDU with IEC60309 532P6 line cord	00YJ778
0U 21 C13/12 C19 48A/200-240V 3 Phase PDU with IEC60309 460P9 line cord	00YJ779
Switched and Monitored PDUs	
0U 20 C13/4 C19 Switched and Monitored 24A/200-240V/1Ph PDU w/ NEMA L6-30P line cord	00YJ781
0U 20 C13/4 C19 Switched and Monitored 32A/200-240V/1Ph PDU w/ IEC60309 332P6 line cord	00YJ780
0U 18 C13/6 C19 Switched / Monitored 32A/200-240V/346-415V/3Ph PDU w/ IEC60309 532P6 cord	00YJ782
0U 12 C13/12 C19 Switched and Monitored 48A/200-240V/3Ph PDU w/ IEC60309 460P9 line cord	00YJ783
1U 9 C19/3 C13 Switched and Monitored DPI PDU (without line cord)	46M4002
1U 9 C19/3 C13 Switched and Monitored 60A 3Ph PDU with IEC 309 3P+Gnd cord	46M4003
1U 12 C13 Switched and Monitored DPI PDU (without line cord)	46M4004
1U 12 C13 Switched and Monitored 60A 3 Phase PDU with IEC 309 3P+Gnd line cord	46M4005
Ultra Density Enterprise PDUs (9x IEC 320 C13 + 3x IEC 320 C19 outlets)	
Ultra Density Enterprise C19/C13 PDU Module (without line cord)	71762NX
Ultra Density Enterprise C19/C13 PDU 60A/208V/3ph with IEC 309 3P+Gnd line cord	71763NU
C13 Enterprise PDUs (12x IEC 320 C13 outlets)	
DPI C13 Enterprise PDU+ (without line cord)	39M2816
DPI Single Phase C13 Enterprise PDU (without line cord)	39Y8941
C19 Enterprise PDUs (6x IEC 320 C19 outlets)	
DPI Single Phase C19 Enterprise PDU (without line cord)	39Y8948
DPI 60A 3 Phase C19 Enterprise PDU with IEC 309 3P+G (208 V) fixed line cord	39Y8923
Front-end PDUs (3x IEC 320 C19 outlets)	
DPI 30amp/125V Front-end PDU with NEMA L5-30P line cord	39Y8938
DPI 30amp/250V Front-end PDU with NEMA L6-30P line cord	39Y8939
DPI 32amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8934
DPI 60amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8940
DPI 63amp/250V Front-end PDU with IEC 309 2P+Gnd line cord	39Y8935
Universal PDUs (7x IEC 320 C13 outlets)	
DPI Universal 7 C13 PDU (with 2 m IEC 320-C19 to C20 rack power cord)	00YE443
NEMA PDUs (6x NEMA 5-15R outlets)	
DPI 100-127V PDU with fixed NEMA L5-15P line cord	39Y8905
Line cords for PDUs that ship without a line cord	
DPI 30a Line Cord (NEMA L6-30P)	40K9614
DPI 32a Line Cord (IEC 309 P+N+G)	40K9612

Description	Part number
DPI 32a Line Cord (IEC 309 3P+N+G)	40K9611
DPI 60a Cord (IEC 309 2P+G)	40K9615
DPI 63a Cord (IEC 309 P+N+G)	40K9613
DPI Australian/NZ 3112 Line Cord	40K9617

For more information, see the list of Product Guides in the Power Distribution Units category:
<http://lenovopress.com/servers/options/pdu>

Uninterruptible power supply units

The following table lists the uninterruptible power supply (UPS) units that are offered by Lenovo that can be used in ThinkServer TS440 solutions.

Table 29. Uninterruptible power supply units

Description	Part number
Tower UPS units	
T1kVA Tower UPS (100-125VAC)	55951AX
T1kVA Tower UPS (200-240VAC)	55951KX
T1.5kVA Tower UPS (100-125VAC)	55952AX
T1.5kVA Tower UPS (200-240VAC)	55952KX
Rack or Tower UPS units	
RT1.5kVA 2U Rack or Tower UPS (100-125VAC)	55941AX
RT1.5kVA 2U Rack or Tower UPS (200-240VAC)	55941KX
RT2.2kVA 2U Rack or Tower UPS (100-125VAC)	55942AX
RT2.2kVA 2U Rack or Tower UPS (200-240VAC)	55942KX
RT3kVA 2U Rack or Tower UPS (100-125VAC)	55943AX
RT3kVA 2U Rack or Tower UPS (200-240VAC)	55943KX
RT5kVA 3U Rack or Tower UPS (200-240VAC)	55945KX
RT6kVA 3U Rack or Tower UPS (200-240VAC)	55946KX
RT8kVA 6U Rack or Tower UPS (200-240VAC)	55948KX
RT11kVA 6U Rack or Tower UPS (200-240VAC)	55949KX
RT8kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC)	55948PX
RT11kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC)	55949PX

For more information, see the list of Product Guides in the Uninterruptible Power Supply Units category:
<http://lenovopress.com/servers/options/ups>

Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region specific offers please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<http://www.lenovofs.com>

Related publications and links

For more information, see these resources:

- ThinkServer TS440 product page
<http://shop.lenovo.com/us/en/systems/servers/towers/thinkserver/ts440>
- ThinkServer TS440 User Guide and Hardware Maintenance Manual
https://download.lenovo.com/pccbbs/thinkservers/ts440_hmm.pdf
- Lenovo Quick Pick for ThinkServer TS440
<http://www.lenovoquickpick.com/usa/system/thinkserver/ts-series/thinkserver-ts440>
- Lenovo Support for ThinkServer TS440
<http://support.lenovo.com/us/en/products/servers/thinkserver-tower-servers/thinkserver-ts440>
- ThinkServer Power Planner
<http://support.lenovo.com/us/en/downloads/ds101155>
- Lenovo Press Product Guides for servers and options (filter by the Product Guide resource type)
<http://lenovopress.com>
- Lenovo PSREF for ThinkServer TS440
http://psref.lenovo.com/Product/ThinkServer_TS440

Related product families

Product families related to this document are the following:

- [1-Socket Tower Servers](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.

Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2025. All rights reserved.

This document, LP0035, was created or updated on March 21, 2017.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP0035>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP0035>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkServer®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Hyper-V®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

IBM® and Storwize® are trademarks of IBM in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.