

ThinkSystem SR950 Server Configurations

Article (withdrawn product)

The Lenovo ThinkSystem SR950 is designed for your most demanding, mission-critical workloads, such as in-memory databases, large transactional databases and real-time analytics, ERP, CRM, and virtualized server workloads. The powerful 4U ThinkSystem SR950 can grow from two to eight Intel Xeon Scalable Family processors and with 96 DIMM that supports up to 12 TB of high-speed memory. The modular design of SR950 speeds upgrades and servicing with easy front or rear access to all major subsystems to maximize server availability.



Figure 1. The

SR950 server is available in 24-drive and 12-drive configurations

Let's take a look at the SR950 various primary configurations that impact the processing power, memory, I/O and storage of the server.

Configuration Summary

The Lenovo ThinkSystem SR950 supports five different primary configurations, depending on the desired number of processors, drive bays, PCIe slots and upgradability to an 8 socket configuration.

The two key decision points in building an SR950 that significantly impact your overall server configuration:

1. Do you need the capability of a simple 8-socket upgrade path?
 - If yes, select SR950 2S to 8S Base (note requires 8100 Series CPUs)
 - If no, select SR950 2S to 4S Base (upgrade to 8S requires a 4S to 8S Upgrade Kit and Lenovo service)
2. Do you need more than 12 storage bays and 6 NVMe?
 - If yes, select 24 Hard Drive Maximum System
 - If no, select 12 Hard Drive Maximum System

There are five overarching configurations of the SR950:

- *Four-Socket Performance* - The highest-performing 4-socket server, at the lowest cost when up to 12 drives is enough and without the need for a simple upgrade (can be upgraded to 8S but requires the 4S to 8S Upgrade Kit and Lenovo hardware installation)

- *Four-Socket Performance/Storage Rich* - The highest-performing 4-socket server, when needing more than 12 drives without the need for a simple upgrade (can be upgraded to 8S but requires the 4S to 8S Upgrade Kit and Lenovo hardware installation)
- *Four-Socket Upgradable* - The lowest-cost 4-socket server capable of being easily upgraded to 8 socket and when 12 drive bays with 4 processors is enough storage.
- *Four-Socket Upgradable / Storage Rich* - 4-socket server capable of being easily upgraded to 8-socket and needing more than 12 drive bays with 4 processor
- *Eight Socket Storage Rich* - Full featured 8-socket server with up to 24 drive bays and the maximum number of PCIe x16 slots

We describe each of these in the remainder of the article.

Four-Socket Performance

Select this configuration when you need a strong performing 4S server and 12 storage drives including up to 6 NVMe drives is enough. Can be upgraded to 8S but requires a 4S to 8S Upgrade Kit and Lenovo hardware installation.

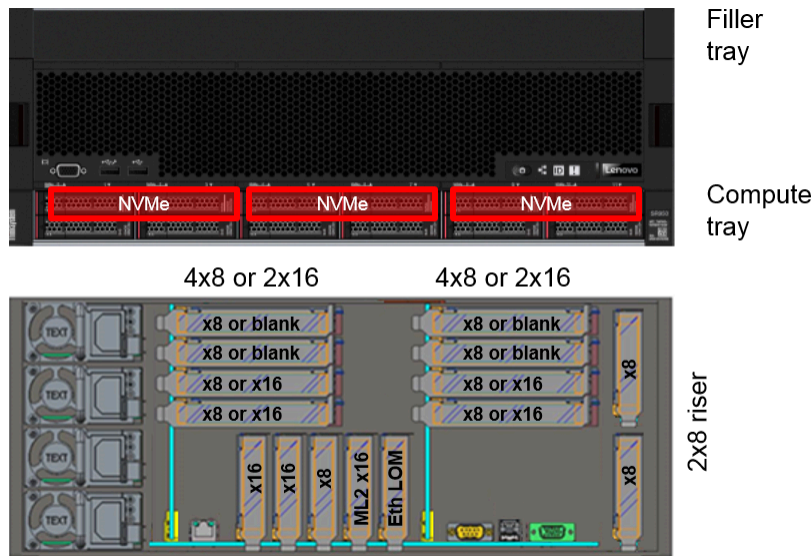


Figure 2. Four-Socket Performance

CPU	4 Intel Xeon Scalable processors (5100, 6100 and 8100 series) or 2 (6100, 8100 series)
Memory	Up to 6TB with 48 DIMMs
Storage	Up to 12 storage bays including up to 6 NVMe. Choice of backplanes that support SAS/SATA or SAS/SATA/NVMe.
RAID	Single RAID adapter support up to 12 drives
PCIe Riser	Up to two 4-x8 or 2-x16 PCI Riser and 2-x8 Riser
PCIe Slots	13 PCIe, 1 ML2, 1 LOM
Upgradable to 8S	Requires a 4S to 8S Upgrade Kit and Lenovo service in addition to the full upper Compute Tray
Cost	Lowest cost SR950 configuration
How to Configure	Select SR950 2S to 4S Base and 12 Hard Drive Maximum

Four-Socket Performance / Storage Rich

Select this configuration when you need a strong performing 4S server and need more than 12 storage drives or more than 6 NVMe drives. Can be upgraded to 8S but requires a 4S to 8S Upgrade Kit and Lenovo hardware installation.

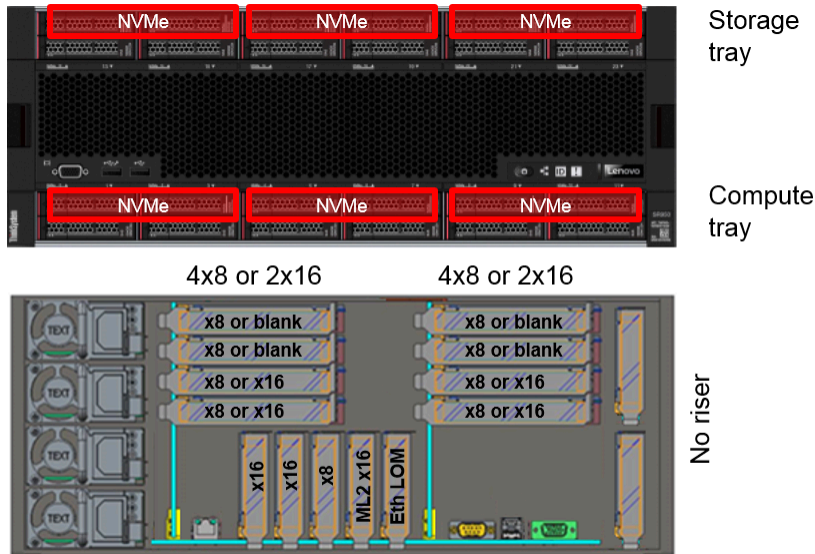


Figure 3. Four-Socket Performance /

Storage Rich

CPU	4 Intel Xeon Scalable processors (5100, 6100 and 8100 series)
Memory	Up to 6TB with 48 DIMMs
Storage	Up to 24 storage bays including up to 12 NVMe. Choice of backplanes that support SAS/SATA or SAS/SATA/NVMe.
RAID	Two RAID adapter support up to 12 drives each
PCIe Riser	Up to two 4-x8 or 2-x16 PCI Risers
PCIe Slots	11 PCIe, 1 ML2, 1 LOM
Upgradable to 8S	Requires a 4S to 8S Upgrade Kit and Lenovo service in addition to the full upper Compute Tray
Cost	Somewhat higher cost than 4S Performance with only 12 storage Bays
How to Configure	Select SR950 2S to 4S Base and 24 Hard Drive Maximum

Four-Socket Upgradable

Select this configuration when you need a 4S server capable of a simple upgrade to 8S when 12 storage drives including up to 6 NVMe drives is enough prior to upgrade.

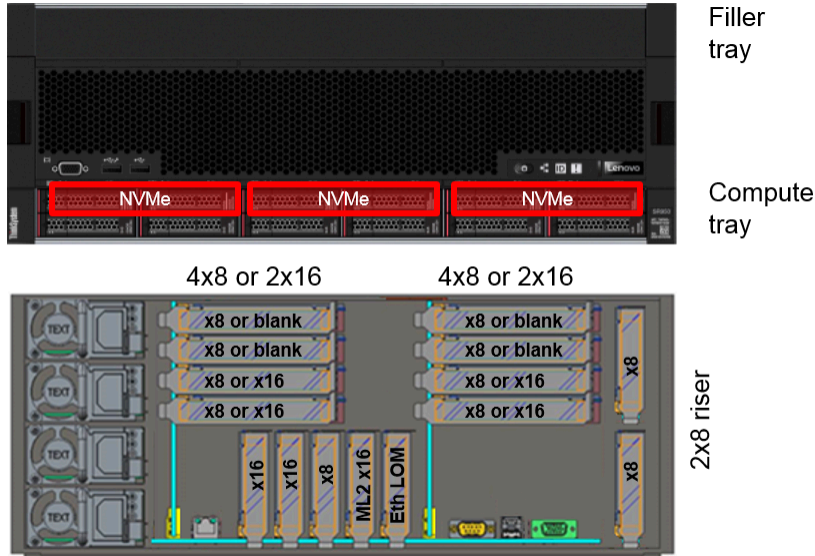


Figure 4. Four-Socket Upgradable

CPU	2 or 4 Intel Xeon Scalable processors 8100 series (only 8100 series processors are capable of 8S scalability)
Memory	Up to 6TB with 48 DIMMs (prior to upgrade)
Storage	Up to 12 storage bays including up to 6 NVMe. Choice of backplanes that support SAS/SATA or SAS/SATA/NVMe. (prior to upgrade)
RAID	Single RAID adapter support up to 12 drives (prior to upgrade)
PCIe Riser	Up to two 4-x8 or 2-x16 PCI Riser and 2-x8 Riser
PCIe Slots	13 PCIe, 1 ML2, 1 LOM
Upgradable to 8S	Simple upgrade to 8S, involves a full upper Compute Tray being added
Cost	Lowest cost SR950 capable of being upgraded to 8S
How to Configure	Select SR950 2S to 8S Base, 12 Hard Drive Maximum and 2 or 4 CPUs

Four-Socket Upgradable / Storage Rich

Select this configuration when you need a 4S server capable of a simple upgrade to 8S and need more than 12 storage drives including up to 6 NVMe drives prior to upgrade.



Figure 5. Four-Socket Upgradable /

Storage Rich

CPU	4 Intel Xeon Scalable processors 8100 series (only 8100 series processors are capable of 8S scalability)
Memory	Up to 6TB with 48 DIMMs (prior to upgrade)
Storage	Up to 24 storage bays including up to 4 NVMe. Choice of backplanes that support SAS/SATA or SAS/SATA/NVMe. (once upgraded will support 12 NVMe)
RAID	Two RAID adapter support up to 12 drives each
PCIe Riser	Up to two 5 x16+ML2 Riser and 2 x8 Riser
PCIe Slots	8 PCIe, 1 ML2, 1 LOM (once upgraded to 8S, will match 8S PCIe)
Upgradable to 8S	Simple upgrade to 8S involves two 2S system boards being added
Cost	Higher cost prior to upgrade but lower upgrade cost. This is due to the Compute System Tray being installed prior to upgrade.
How to Configure	Select SR950 2S to 8S Base, 24 Hard Drive Maximum and 4 CPUs

Eight Socket / Storage Rich

Select this configuration when you need a high performing 8S server with up to 24 storage drives including up to 12 NVMe. Also provides a tremendous amount of x16 PCIe.

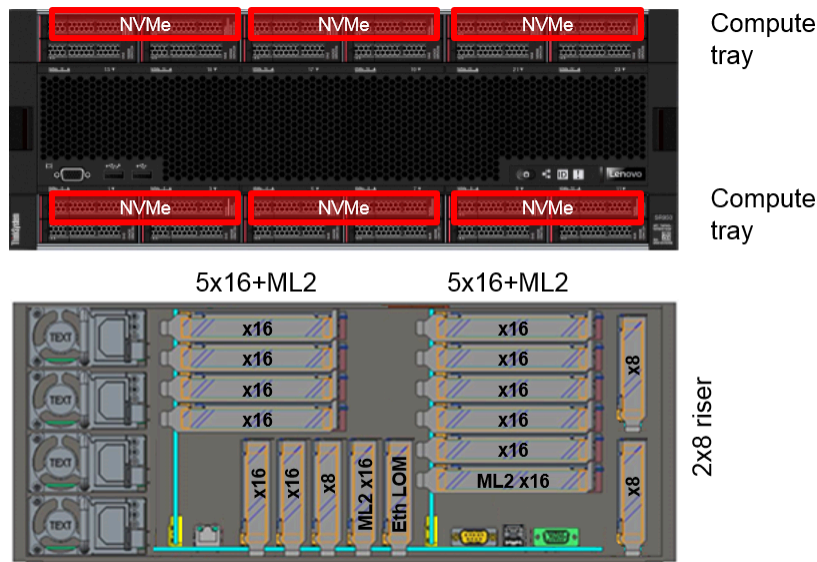


Figure 6. Eight Socket / Storage

Rich

CPU	8 Intel Xeon Scalable processors 8100 series (only 8100 series processors are capable of 8S scalability)
Memory	Up to 12TB with 96 DIMMs
Storage	Up to 24 storage bays including up to 12 NVMe. Choice of backplanes that support SAS/SATA or SAS/SATA/NVMe.
RAID	Two RAID adapter support up to 12 drives each
PCIe Riser	Up to two 5 x16+ML2 Riser and 2 x8 Riser
PCIe Slots	14 PCIe, 2 ML2, 1 LOM
Upgradable to 8S	Configured and shipped as 8S
Cost	Higher cost prior to upgrade but lower upgrade cost. This is due to the Compute System Tray being installed prior to upgrade.
How to Configure	Select SR950 2S to 8S Base, 24 Hard Drive Maximum and 8 CPUs

Conclusion

The SR950 is a very configurable system in terms of processors, memory, storage and I/O. Understanding the five different primary configurations will help you optimize the SR950 to best match your needs for performance, scalability and capabilities.

Further reading

For further reading, see these resources

- [Lenovo Press product guide on the SR950](#)
- [SR950 product web page](#)

This article is one in a series on the ThinkSystem SR950 and SR850 servers:

- [Five Highlights of the ThinkSystem SR950](#)
- [Five Highlights of the ThinkSystem SR850](#)
- [Choosing between Lenovo ThinkSystem SR850 and SR950](#)
- [Workloads for 4-Socket and 8-Socket Servers](#)
- [Usability in the Design of the ThinkSystem SR950](#)
- [The Value of Refreshing Your 4-Socket Servers with the ThinkSystem SR950](#)
- [ThinkSystem SR950 Memory Decisions](#)
- **[ThinkSystem SR950 Server Configurations](#)**
- [The Value of Refreshing Your 8-Socket Servers with the ThinkSystem SR950](#)
- [Lenovo ThinkSystem SR950 New Options and Features - December 2017](#)
- [ThinkSystem SR950 Performance Leadership](#)
- [Lenovo Servers for Mission Critical Workloads](#)
- [Microsoft and Lenovo ThinkSystem SR950 – A Perfect Match](#)
- [Accelerate Your 4- and 8-Socket Server Refresh Cycle](#)
- [SAP Business Process Applications and Lenovo ThinkSystem SR950 – A Perfect Match](#)
- [ThinkSystem SR950 New Options - March 2018](#)
- [SAP HANA and Lenovo ThinkSystem SR950 – A Perfect Match](#)
- [ThinkSystem SR950 Performance Leadership Continues](#)
- [New Solution for SAP HANA - Lenovo ThinkAgile HX](#)
- [The Advantages of Keeping Mission Critical Workloads On-Premises vs Going to the Cloud](#)

About the author

Randall Lundin is a Senior Product Manager in the Lenovo Infrastructure Solution Group. He is responsible for planning and managing ThinkSystem servers. Randall has also authored and contributed to numerous Lenovo Press publications on ThinkSystem products.

Related product families

Product families related to this document are the following:

- [4-Socket Rack Servers](#)
- [8-Socket Rack Servers](#)
- [Large Memory Capacity Servers](#)
- [ThinkSystem SR950 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2026. All rights reserved.

This document, LP0775, was created or updated on January 3, 2018.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP0775>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP0775>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkAgile®

ThinkSystem®

The following terms are trademarks of other companies:

Intel®, the Intel logo and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Microsoft is a trademark of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.