

Lenovo ThinkSystem SR670 Server (Xeon SP Gen 1) Product Guide (withdrawn product)

The Lenovo ThinkSystem SR670 is a 2U rack server that has been designed to support up to eight high-performance GPUs. Models of the SR670 are powered by two Intel Xeon Processor Scalable Family processors and the ratio of up to 1:4 for CPUs to GPUs means the server is an excellent choice for the emerging requirements for HPC and AI.

Suggested uses: The SR670 system is ideal for running Artificial Intelligence (AI), High Performance Computing (HPC), and Virtual Desktop Infrastructure (VDI) workloads.



Figure 1. Front view of the Lenovo ThinkSystem SR670

Did you know?

With support for eight single-width GPUs or four double-width GPUs per server, the SR670 is ideal for scale-out with both HPC and AI workloads. The server adheres to open industry standards, provides modularity for users, and avoids single points of failure.

Lenovo is the leading provider of supercomputers in the TOP500. Lenovo is trusted by 17 of the world's top 25 research universities to provide scalable, high-performance solutions. The SR670 provides performance and reliability with a scalable solution for enterprise and research.

Key features

The Lenovo ThinkSystem SR670 delivers optimal performance for Artificial Intelligence (AI) and high-performance computing (HPC) workloads while maintaining a low total cost of ownership (TCO). The SR670 allows up to eight GPUs per 2U node and is suited for computationally intensive workload requirements for both Machine Learning (ML) and Deep Learning (DL).

Built on Intel Xeon processor Scalable Family CPUs and designed to support high-end GPUs including NVIDIA Tesla V100, the ThinkSystem SR670 delivers optimized performance for AI training and accelerated HPC workloads.

SR670 capabilities include:

- Up to eight half-length/single-width GPUs or four full-length/double-width GPUs in a 2U form factor
- Up to eight 2.5-inch drives and M.2 boot SSDs for storage flexibility
- Support for 100 GbE and EDR InfiniBand adapters including Intel OPA support for high-performance networking
- Enabled for Lenovo intelligent Computing Orchestration (LiCO) HPC/AI management software

Scalability and performance

The SR670 offers numerous features to boost performance, improve scalability and reduce costs:

- Supports two processors in the Intel Xeon Processor Scalable Family. Processors supported have up to 28 cores, core speeds of up to 3.5GHz, L3 cache sizes up to 38.5 MB, and TDP ratings of up to 205W.
- Supports up to four high-performance GPUs, including the NVIDIA Tesla V100, resulting in a 1:2 ratio of CPUs to GPUs. Alternatively supports up to eight NVIDIA T4 single-wide GPUs, resulting in a 1:4 ratio of CPUs to GPUs.
- Intelligent and adaptive system performance with Intel Turbo Boost Technology 2.0 allows processor cores to run at maximum speeds during peak workloads by temporarily going beyond processor TDP.
- Intel Hyper-Threading Technology boosts performance for multithreaded applications by enabling simultaneous multithreading within each processor core, up to two threads per core.
- Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better use the hardware for virtualization workloads.
- Support for up to 24 TruDDR4 memory DIMMs operating at 2666 MHz means you have the fastest available memory subsystem and memory capacity of up to 768 GB using 24x 32 GB RDIMMs.
- High-speed RAID controllers from Broadcom provide 12 Gb SAS connectivity to the drive backplane. 12 Gbps SAS internal storage connectivity doubles the data transfer rate compared to 6 Gb SAS solutions to maximize performance of storage I/O-intensive applications.
- The use of solid-state drives (SSDs) instead of, or along with, traditional spinning drives (HDDs), can improve I/O performance. An SSD can support up to 100 times more I/O operations per second (IOPS) than a typical HDD.
- Up to 8x 2.5-inch drives, supporting HDDs and SSDs, either SAS or SATA, provide a flexible local storage platform.
- Supports a Lenovo patented-design M.2 adapter for convenient operating system boot functions. Available M.2 adapters support either one M.2 drive or two M.2 drives in a RAID 1 configuration for boot drive performance and reliability.
- Up to 11x PCIe slots with space for 8x single-wide GPUs, or up to 8x PCIe slots with space for 4x double-wide GPUs; plus 3x additional general-purpose PCIe slots for network adapters.

- The server offers PCI Express 3.0 I/O expansion capabilities that improve the theoretical maximum bandwidth by almost 100% (8 GTps per link using 128b/130b encoding) compared to the previous generation of PCI Express 2.0 (5 GTps per link using 8b/10b encoding).

Availability and serviceability

The SR670 provides many features to simplify serviceability and increase system uptime:

- The server offers Single Device Data Correction (SDDC, also known as Chipkill), Adaptive Double-Device Data Correction (ADDDC, also known as Redundant Bit Steering or RBS), memory mirroring, and memory rank sparing for redundancy in the event of a non-correctable memory failure.
- The server offers hot-swap drives, supporting RAID redundancy for data protection and greater system uptime.
- The Dual M.2 Boot Adapter supports RAID-1 which enables two installed M.2 drives to be configured as a redundant pair.
- The server has up to two hot-swap redundant power supplies and six simple-swap redundant fans to provide availability for business-critical applications.
- Proactive Platform Alerts (including PFA and SMART alerts): Processors, voltage regulators, memory, internal storage (HDDs, SSDs, M.2 drives), fans, power supplies, server ambient and subcomponent temperatures. Alerts can be surfaced through the XClarity Controller to upstream managers. These proactive alerts let you take appropriate actions in advance of possible failure, thereby increasing server uptime and application availability.
- Solid-state drives (SSDs) offer more reliability than traditional mechanical HDDs for greater uptime.
- The built-in XClarity Controller continuously monitors system parameters, triggers alerts, and performs recovery actions in case of failures to minimize downtime.
- Built-in diagnostics in UEFI, using Lenovo XClarity Provisioning Manager, speed up troubleshooting tasks to reduce service time.
- Lenovo XClarity Provisioning Manager collects and saves service data to USB key drive or remote CIFS share folder, for troubleshooting and to reduce service time.
- Auto restart in the event of a momentary loss of AC power (based on the power policy setting in the XClarity Controller service processor)
- Three-year or one-year customer-replaceable unit and onsite limited warranty, 9 x 5 next business day. Optional service upgrades are available. The SR670 can also be ordered without a warranty if needed.

Manageability and security

Powerful systems management features simplify local and remote management of the SR670:

- The server includes an XClarity Controller (XCC) to monitor server availability. Optional upgrade to XCC Advanced to provide remote control (keyboard video mouse) functions. Optional upgrade to XCC Enterprise enables the additional support for the mounting of remote media files (ISO and IMG image files), boot capture, and power capping.
- UEFI-based Lenovo XClarity Provisioning Manager, accessible from F1 during boot, provides system inventory information, graphical UEFI Setup, platform update function, RAID Setup wizard, operating system installation function, and diagnostic functions.
- Supports Lenovo intelligent Computing Orchestration (LiCO), a powerful platform that manages cluster resources for HPC and AI applications. LiCO supports multiple AI frameworks, including TensorFlow, Caffe, Neon, and MXNet, allowing you to leverage a single cluster for diverse workload requirements.
- Rack-level power capping and management via Extreme Cloud Administration Toolkit (xCAT)

- Integrated Trusted Platform Module (TPM) 2.0 support enables advanced cryptographic methods, such as digital signatures and remote attestation.
- Supports Secure Boot to ensure only a digitally signed operating system can be used. Supported with HDDs and SSDs, as well as M.2 drives in the M.2 Adapter.
- Industry-standard Advanced Encryption Standard (AES) NI support for faster, stronger encryption.
- Intel Execute Disable Bit functionality can prevent certain classes of malicious buffer overflow attacks when combined with a supported operating system.
- Intel Trusted Execution Technology provides enhanced security through hardware-based resistance to malicious software attacks, allowing an application to run in its own isolated space, protected from all other software running on a system.

Energy efficiency

The SR670 offers the following energy-efficiency features to save energy, reduce operational costs, and increase energy availability:

- Energy-efficient planar components help lower operational costs.
- High-efficiency power supplies with 80 PLUS Platinum certifications
- Intel Intelligent Power Capability turns individual processor elements on and off as needed to reduce power draw.
- Low-voltage 1.2 V DDR4 memory offers energy savings compared to 1.35 V and 1.5 V DDR3 DIMMs.
- Solid-state drives (SSDs) consume as much as 80% less power than traditional spinning 2.5-inch HDDs.
- The server uses hexagonal ventilation holes, which can be grouped more densely than round holes, providing more efficient airflow through the system and thus keeping your system cooler.

Components and connectors

The following figure shows the front of the server.

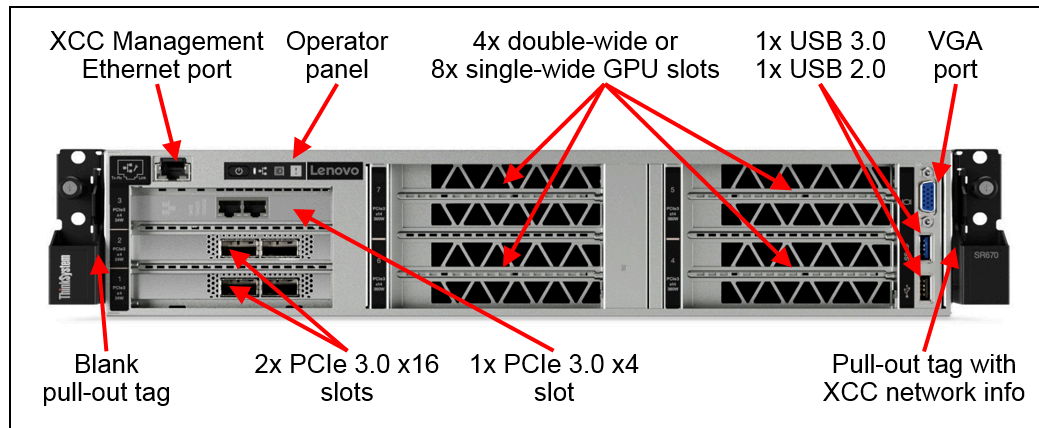


Figure 2. Front

view of the Lenovo ThinkSystem SR670

The following figure shows the rear of the server.

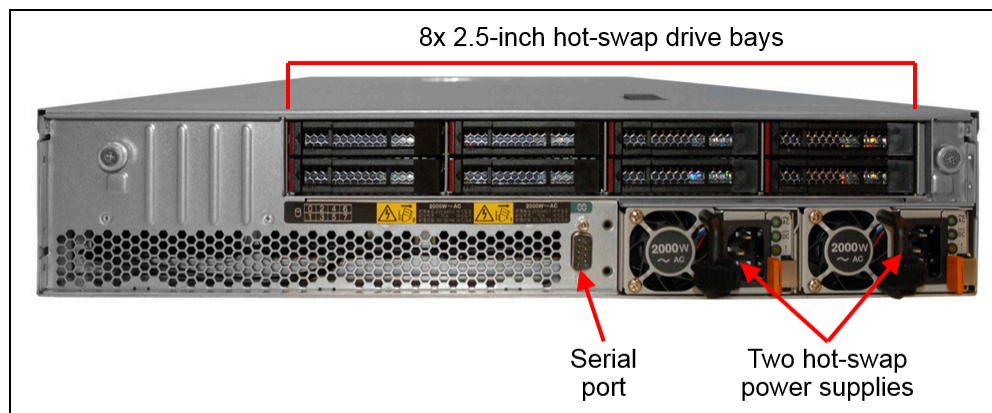


Figure 3. Rear view

of the Lenovo ThinkSystem SR670

The following figure shows the locations of key components inside the server.

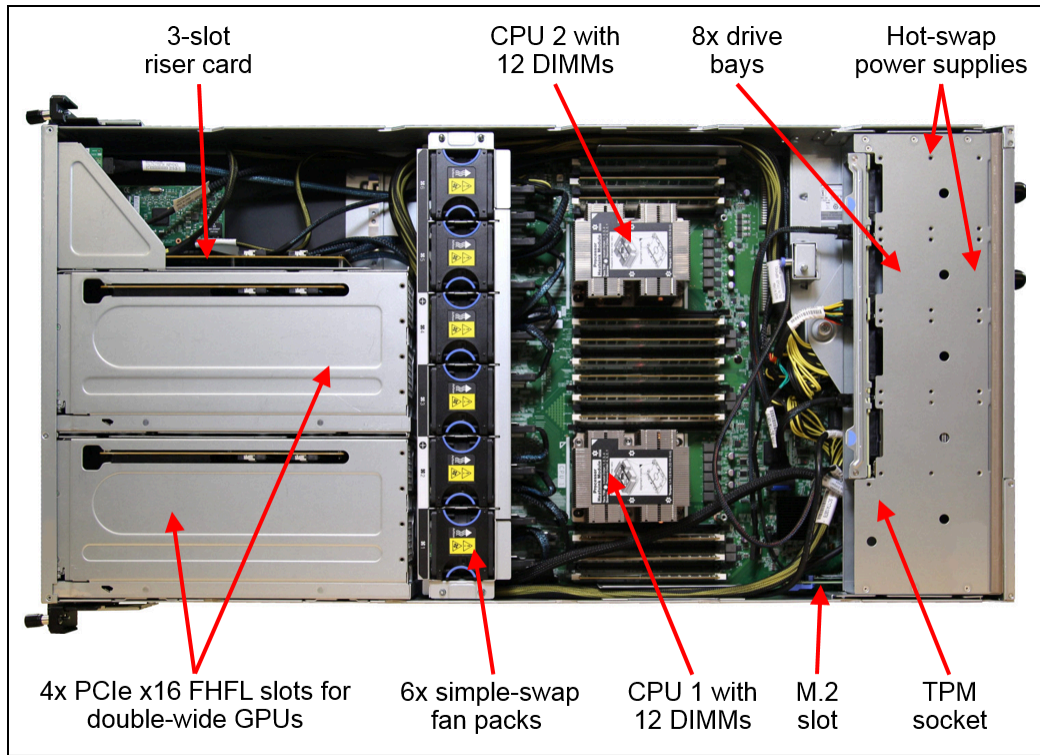


Figure 4.

Internal view of the Lenovo ThinkSystem SR670

System architecture

The following figure shows the architectural block diagram of the SR670, showing the major components and their connections.

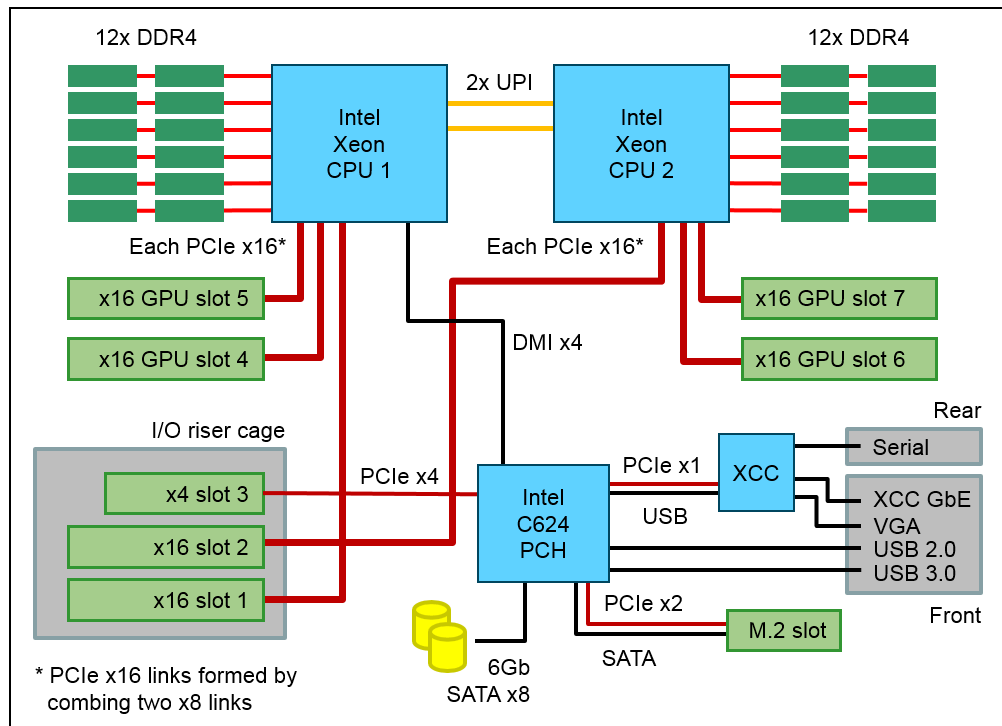


Figure 5. SR670

system architectural block diagram (four x16 GPU slots)

When the server is configured with eight PCIe x8 slots for GPUs, the architectural block diagram of the SR670 is as shown in the following diagram.

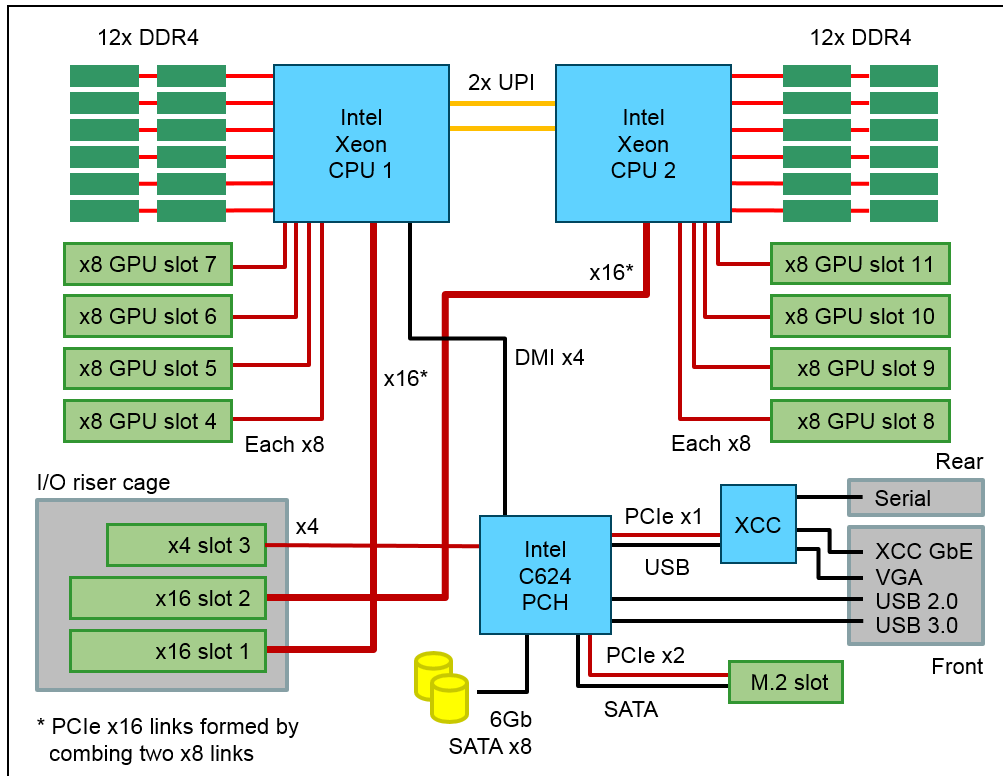


Figure 6. SR670

system architectural block diagram (eight x8 GPU slots)

Standard specifications

The following table lists the standard specifications.

Table 1. Standard specifications

| Components | Specification |
|--------------------------|--|
| Machine types | 7Y36 - 1 year warranty 7Y37 - 3 year warranty 7Y38 - No warranty |
| Form factor | 2U rack. |
| Processor | Two Intel Xeon Processor Scalable Family of processors (formerly codename "Skylake") up to 28 cores and TDP ratings up to 205W. Two Intel Ultra Path Interconnect (UPI) links at 10.4 GT/s each. |
| Chipset | Intel C624 "Lewisburg" chipset |
| Memory | 24 DIMM sockets (12 DIMMs per processor) supporting Lenovo TruDDR4 RDIMMs at up to 2666 MHz. |
| Memory maximums | With RDIMMs: Up to 768 GB with 24x 32 GB RDIMMs and two processors. |
| Memory protection | ECC, SDDC (for x4-based memory DIMMs), ADDDC (for x4-based memory DIMMs), memory mirroring, and memory sparing. |
| Disk drive bays | Eight 2.5-inch hot-swap drive bays supporting SATA HDDs and SSDs. M.2 slot for one or two M.2 drives. |
| Maximum internal storage | Up to 16 TB using 8x 2TB SATA HDDs, or up to 12.8 TB using 8x 1.6 TB SAS SSDs. Mix of SSDs/HDDs supported. |
| Storage controller | <ul style="list-style-type: none"> • Onboard 6 Gb SATA for simple-swap drive configurations, using embedded Intel RSTe software RAID, supporting RAID 0, 1, 10, 5 • 12 Gb SAS/SATA RAID for hot-swap drive configurations: <ul style="list-style-type: none"> ◦ RAID 530i (cacheless) supports RAID 0, 1, 10, 5, 50 ◦ RAID 730-8i with 1GB cache supports RAID 0, 1, 10, 5, 50 ◦ RAID 930-8i with 2GB flash-backed cache supports RAID 0, 1, 10, 5, 50, 6, 60 • 12 Gb SAS/SATA non-RAID: 430-8i HBA |
| Optical drive bays | No internal optical drive. |
| Tape drive bays | No internal backup drive. |
| Network interfaces | None standard; add networking via a PCIe adapter. Dedicated Ethernet port for systems management (connected to the XClarity Controller) is standard. |
| PCI Expansion slots | <ul style="list-style-type: none"> • With support for four double-wide GPUs, there are seven front-accessible PCIe slots • With support for eight-wide GPUs, there are 11 front-accessible PCIe slots <p>See the I/O expansion options section for details.</p> |
| Ports | <p>Front: One USB 2.0 port, one USB 3.0 port, one VGA video port, one RJ45 XClarity Controller (XCC) systems management port.</p> <p>Rear: One DB9 serial port. The serial port can be redirected and accessed remotely via IPMI or SSH via XCC.</p> |
| Cooling | Six N+1 redundant simple-swap 60 mm dual-rotor fans (all six standard). One fan integrated in each power supply. |

| Components | Specification |
|-----------------------------|--|
| Power supply | Two 2000W hot-swap AC power supplies with 80 PLUS Platinum certification. Power supplies are redundant in most configurations. Requires 200-240 V AC power (110 V AC not supported). |
| Video | G200e graphics with 16 MB memory with 2D hardware accelerator, integrated into the XClarity Controller. Maximum resolution is 1920x1200 32bpp at 60Hz. |
| Hot-swap parts | Drives and power supplies. |
| Systems management | XClarity Controller embedded systems management. Support for Lenovo intelligent Computing Orchestration (LiCO), Lenovo XClarity Essentials (BoMC, UpdateExpress, OneCLI), Lenovo XClarity Provisioning Manager. Redfish API Spec v1.0.2 compliant. Optional XClarity Controller Advanced or Enterprise with software license upgrade to enable remote control functions. XClarity Administrator and XClarity Energy Manager currently not supported. |
| Security features | Power-on password, administrator's password, Trusted Platform Module (TPM), supporting TPM 2.0 . In China only, optional Nationz TPM 2.0 plug-in module. |
| Operating systems supported | Red Hat Enterprise Linux. See the Operating system support section for specifics. |
| Limited warranty | Three-year or one-year or no warranty (model dependent). Customer-replaceable unit (CRU) and onsite limited warranty with 9x5 next business day (NBD). |
| Service and support | Optional service upgrades are available through Lenovo Services: 4-hour or 2-hour response time, 6-hour fix time, 1-year or 2-year warranty extension, software support for Lenovo hardware and some third-party applications. |
| Dimensions | Width: 448 mm (17.6 in.), height: 87 mm (3.4 in.), depth: 906 mm (35.7 in.). See Physical and electrical specifications for details. |
| Weight | 32 kg (71.9 lb) depending on the specific configuration |

The SR670 server is shipped with the following items:

- Documentation flyer
- Power cords (model and region dependent)

Processors

The SR670 supports two processors in the Intel Xeon Processor Scalable Family. Both processors must be installed.

The server supports the processor options that are listed in the following table.

All supported processors have the following characteristics:

- 14 nm process technology
- Six DDR4 memory channels
- 48 PCIe 3.0 I/O lanes
- 1 MB L2 cache
- 1.375 MB L3 cache per core (except where larger, as noted with ** in the table below)
- Intel Hyper-Threading Technology
- Intel Turbo Boost Technology 2.0
- Intel Advanced Vector Extensions 512 (AVX-512)
- Intel Ultra Path Interconnect (UPI) links at 10.4 GT/s (replaces QPI)

Tip: Two processors are installed in the factory so there are no part numbers for field upgrades.

Table 2. Processor options

| Feature code | Description | Memory speed | Supports >768 GB per CPU | L3 cache** | AVX-512 FMA units |
|--------------|--|--------------|--------------------------|------------|-------------------|
| AWEE | Intel Xeon Silver 4110 8C 85W 2.1GHz | 2400 MHz | No | 11 MB | 1 |
| AWER | Intel Xeon Silver 4116 12C 85W 2.1GHz | 2400 MHz | No | 16.5 MB | 1 |
| AWEP | Intel Xeon Gold 5118 12C 105W 2.3GHz | 2400 MHz | No | 16.5 MB | 1 |
| AWEN | Intel Xeon Gold 6130 16C 125W 2.1GHz | 2666 MHz | No | 22 MB | 2 |
| AWDY | Intel Xeon Gold 6132 14C 140W 2.6GHz | 2666 MHz | No | 19.25 MB | 2 |
| AWE9 | Intel Xeon Gold 6134 8C 130W 3.2GHz | 2666 MHz | No | 24.75 MB** | 2 |
| AWE3 | Intel Xeon Gold 6136 12C 150W 3.0GHz | 2666 MHz | No | 24.75 MB** | 2 |
| AWE1 | Intel Xeon Gold 6140 18C 140W 2.3GHz | 2666 MHz | No | 24.75 MB | 2 |
| AWDW | Intel Xeon Gold 6142 16C 150W 2.6GHz | 2666 MHz | No | 22 MB | 2 |
| AWE7 | Intel Xeon Gold 6144 8C 150W 3.5GHz | 2666 MHz | No | 24.75 MB** | 2 |
| AWE0 | Intel Xeon Gold 6146 12C 165W 3.2GHz | 2666 MHz | No | 24.75 MB** | 2 |
| AWEW | Intel Xeon Gold 6148 20C 150W 2.4GHz | 2666 MHz | No | 27.5 MB | 2 |
| AWDT | Intel Xeon Gold 6150 18C 165W 2.7GHz | 2666 MHz | No | 24.75 MB | 2 |
| AWDV | Intel Xeon Gold 6152 22C 140W 2.1GHz | 2666 MHz | No | 30.25 MB | 2 |
| AWDN | Intel Xeon Gold 6154 18C 200W 3.0GHz | 2666 MHz | No | 24.75 MB | 2 |
| AWDP | Intel Xeon Platinum 8160 24C 150W 2.1GHz | 2666 MHz | No | 33 MB | 2 |
| AWDJ | Intel Xeon Platinum 8168 24C 205W 2.7GHz | 2666 MHz | No | 33 MB | 2 |
| AWDK | Intel Xeon Platinum 8170 26C 165W 2.1GHz | 2666 MHz | No | 35.75 MB | 2 |
| AWDH | Intel Xeon Platinum 8176 28C 165W 2.1GHz | 2666 MHz | No | 38.5 MB | 2 |
| AWDF | Intel Xeon Platinum 8180 28C 205W 2.5GHz | 2666 MHz | No | 38.5 MB | 2 |

** L3 cache is 1.375 MB per core except for processor indicated with ** where the cache size is larger

Memory

The SR670 server supports TruDDR4 memory. TruDDR4 memory uses the highest-quality components sourced from Tier 1 DRAM suppliers and only memory that meets strict tolerances is selected. It is compatibility tested and tuned to maximize performance and reliability.

TruDDR4 memory has a unique signature programmed into the DIMM, which enables ThinkSystem servers to verify whether the memory installed is qualified and supported. From a service and support standpoint, TruDDR4 memory automatically assumes the system's warranty, and service and support provided worldwide.

The server supports 8, 12, 16 or 24 DIMMs with the two processors installed. Each processor has six memory channels, and supports one or two DIMMs per channel.

All DIMMs can operate at a speed of 2666 MHz, both at 1 DIMM per channel and 2 DIMMs per channel. However, if the processor selected has a lower memory bus speed (eg 2400 MHz), then all DIMMs will operate at that lower speed.

The following table lists the memory options that are available for the SR670 server.

Table 3. Memory options

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|---|-----------------------|
| 7X77A01303 | AUNC | ThinkSystem 16GB TruDDR4 2666 MHz (2Rx8 1.2V) RDIMM | 24 (12 per processor) |
| 7X77A01304 | AUND | ThinkSystem 32GB TruDDR4 2666 MHz (2Rx4 1.2V) RDIMM | 24 (12 per processor) |

Configuration rules:

- The server supports RDIMMs. LRDIMMs, 3DS RDIMMs and UDIMMs are not supported.
- The SR670 server only supports four memory configurations:
 - 8 DIMMs, which are installed in DIMM slots 3, 5, 8, 10, 15, 17, 20, and 22.
 - 12 DIMMs, which are installed in DIMM slots 1, 3, 5, 8, 10, 12, 13, 15, 17, 20, 22, and 24.
 - 16 DIMMs, which are installed in DIMM slots 3, 4, 5, 6, 7, 8, 9, 10, 15, 16, 17, 18, 19, 20, 21, and 22
 - 24 DIMMs, installed in all slots.
- All DIMMs to be installed must be the same type and capacity.

The following memory protection technologies are supported:

- ECC
- SDDC (for x4-based memory DIMMs; look for "x4" in the DIMM description)
- ADDDC (for x4-based memory DIMMs)
- Memory channel mirroring
- Memory rank sparing

If memory channel mirroring is used, then DIMMs must be installed in pairs (minimum of one pair per processor), and both DIMMs in a pair must be identical in type and size. 50% of the installed capacity is available to the operating system.

If memory rank sparing is used, then a minimum of one quad-rank DIMM, one dual-rank DIMM, or two single-rank DIMMs must be installed per populated channel (the DIMMs do not need to be identical). In rank sparing mode, one rank of a DIMM in each populated channel is reserved as spare memory. The largest rank in the channel will be automatically selected as the spare rank. The amount of memory

available to the operating system depends on the number, capacity and rank counts of the DIMMs installed.

Internal storage

The server support 8x 2.5-inch drives. Currently, only SATA HDDs and SSDs are supported. You can mix drives in the same server, but not in the same array. Drives are all installed from the rear of the server. The server also supports one or two M.2 drives, installed in an M.2 adapter.

In this section:

- [Backplane and drive bays](#)
- [M.2 drives](#)

Backplane and drive bays

The SR670 offers eight 2.5-inch hot-swap drive bays, located at the rear of the server. All eight drive bays are connected to a single backplane. The backplane supports SAS and SATA drives. SAS drives require the use of a supported SAS HBA or RAID controller.

The drive bays are numbered as shown in the following figure.

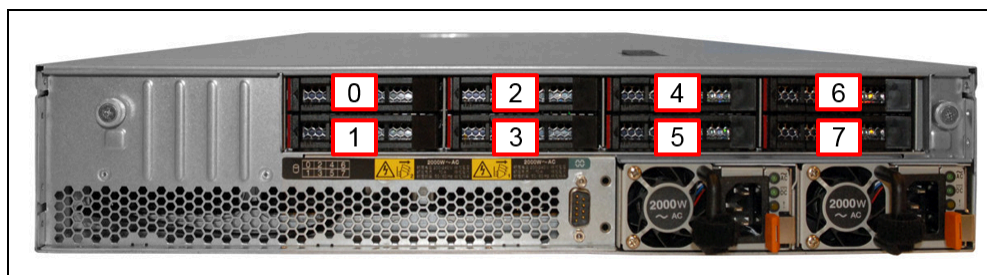


Figure 7. Drive bay

numbering (rear of the server)

The drive bays support 6Gb SATA drives or 12Gb SAS drives. NVMe drives are not supported.

M.2 drives

The server supports one or two M.2 form-factor SATA drives for use as an operating system boot solution. With two M.2 drives configured, the drives are configured by default as a RAID-1 mirrored pair for redundancy.

The M.2 drives install into an M.2 adapter which in turn is installed in a dedicated slot on the system board. See the internal view of the server in the [Components and connectors](#) section for the location of the M.2 slot.

There are two M.2 adapters supported, as listed in the following table.

Table 4. M.2 components

| Part number | Feature code | Description | Maximum supported |
|-------------|--------------|--|-------------------|
| 7Y37A01092 | AUMU | ThinkSystem M.2 Enablement Kit (contains the Single M.2 Boot Adapter; supports 1 drive) | 1 |
| 7Y37A01093 | AUMV | ThinkSystem M.2 with Mirroring Enablement Kit (contains the Dual M.2 Boot Adapter, supports 1 or 2 drives) | 1 |

Supported drives are listed in the [Internal drive options](#) section.

For details about M.2 components, see the *ThinkSystem M.2 Drives and M.2 Adapters* product guide:

<https://lenovopress.com/lp0769-thinksystem-m2-drives-adapters>

Controllers for internal storage

The SR670 supports one of the following controllers to connect to the eight internal drive bays:

- SAS/SATA RAID adapter
- SAS HBA adapter
- Onboard SATA controller

The following table lists the supported adapters.

Table 5. Controllers for internal storage

| Part number | Feature code | Description | Number of ports | Maximum supported |
|---------------|--------------|---|-----------------|-------------------|
| SAS/SATA HBA | | | | |
| 4Y37A16228 | B5MR | ThinkSystem SR670 430-8i SAS/SATA HBA | 8 | 1 |
| RAID adapters | | | | |
| 4Y37A16225 | B5MP | ThinkSystem SR670 RAID 530-8i PCIe Adapter | 8 | 1 |
| 4Y37A16226 | B5MQ | ThinkSystem SR670 RAID 730-8i 1GB Cache Adapter | 8 | 1 |
| 4Y37A16227 | B5DP | ThinkSystem SR670 RAID 930-8i 2GB Flash | 8 | 1 |

The onboard SATA controller onboard is integrated into the server chipset. An SFF-9402 OCulink x8 SATA connector routes the signals to the eight internal drive bays at the rear of the server. The SATA controller operates in either AHCI mode for JBOD support, or Intel RSTe mode for RAID support. In RSTe mode, Intel RAID features are accessible via XClarify Provisioning Manager (UEFI-based) where you can enabling RAID volumes of up to 8 drives. RAID levels 0, 1, 5, 10 are supported.

Virtualization support: The SATA ports of the onboard SATA controller can be used with virtualization hypervisors, including VMware ESXi, Linux KVM, Xen, and Microsoft Hyper-V Server, however support is limited to AHCI (non-RAID) mode. RSTe mode is not supported with virtualization hypervisors.

The following table compares the functions of the storage adapters and the onboard SATA controller.

Table 6. Comparison of internal storage controllers

| Feature | Intel RSTe | 430-8i | RAID 530-8i | RAID 730-8i | RAID 930-8i |
|-----------------|------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Adapter type | Software RAID | HBA | RAID controller | RAID controller | RAID controller |
| Form factor | Onboard | PCIe low profile | PCIe HHHL | PCIe low profile | PCIe HHHL |
| Controller chip | Intel PCH (RSTe) | LSI SAS3408 | LSI SAS3408 | LSI SAS3108 | LSI SAS3508 |
| Host interface | PCH | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 | PCIe 3.0 x8 |
| Port interface | 6 Gb SATA | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS | 12 Gb SAS |
| Number of ports | 8 | 8 | 8 | 8 | 8 |
| Port connectors | SFF-9402 OCulink x8 SATA connector | 2x Mini-SAS HD x4 (SFF-8643) | 2x Mini-SAS HD x4 (SFF-8643) | 2x Mini-SAS HD x4 (SFF-8643) | 2x Mini-SAS HD x4 (SFF-8643) |
| Drive interface | SATA | SAS, SATA | SAS, SATA | SAS, SATA | SAS, SATA |
| Drive type | HDD, SSD | HDD, SSD, SED* | HDD, SED, SSD | HDD, SSD | HDD, SED, SSD |
| Hot-swap drives | Yes | Yes | Yes | Yes | Yes |
| Max devices | 8 | 8 | 8 | 8 | 8 |

| Feature | Intel RSTe | 430-8i | RAID 530-8i | RAID 730-8i | RAID 930-8i |
|------------------------------------|-----------------|---------|-----------------|-----------------|------------------------|
| RAID levels | 0, 1, 10, 5 | No RAID | 0, 1, 10, 5, 50 | 0, 1, 10, 5, 50 | 0, 1, 10, 5, 50, 6, 60 |
| JBOD mode | Yes (AHCI mode) | Yes | Yes | Yes | Yes |
| Cache | None | No | None | 1GB (Standard) | 2GB (Standard) |
| CacheVault cache protection | No | No | No | No | Yes (Flash) |
| Performance Accelerator (FastPath) | No | No | Yes | No | Yes |
| SSD Caching (CacheCade Pro 2.0) | No | No | No | No | No |
| SED support | No | Yes* | Yes | No | Yes |

* SAS HBAs support SEDs (self-encrypting drives) by using software on the server and simply passing SED commands through the HBA to the drives. SED support by RAID controllers is provided using the built-in MegaRAID SafeStore functionality of the adapter.

For more information about the adapters see the product guides in the RAID adapters or HBA sections of the Lenovo Press web site:

<https://lenovopress.com/servers/options/raid>

<https://lenovopress.com/servers/options/hba>

Internal drive options

The following tables list the hard disk drive and solid-state drive options for the internal disk storage of the server.

2.5-inch hot-swap drives:

- [2.5-inch hot-swap 12 Gb SAS HDDs](#)
- [2.5-inch hot-swap 6 Gb SATA HDDs](#)
- [2.5-inch hot-swap 12 Gb SAS SSDs](#)
- [2.5-inch hot-swap 6 Gb SATA SSDs](#)

M.2 drives:

- [M.2 SATA drives](#)

M.2 drive support: The use of M.2 drives requires an additional adapter as described in the [M.2 drives](#) subsection.

Table 7. 2.5-inch hot-swap 12 Gb SAS HDDs

| Part number | Feature | Description | Maximum supported |
|--|---------|---|-------------------|
| 2.5-inch hot-swap HDDs - 12 Gb SAS 10K | | | |
| 7XB7A00024 | AULY | ThinkSystem 2.5" 300GB 10K SAS 12Gb Hot Swap 512n HDD | 8 |
| 7XB7A00025 | AULZ | ThinkSystem 2.5" 600GB 10K SAS 12Gb Hot Swap 512n HDD | 8 |
| 7XB7A00027 | AUM1 | ThinkSystem 2.5" 1.2TB 10K SAS 12Gb Hot Swap 512n HDD | 8 |

Table 8. 2.5-inch hot-swap 6 Gb SATA HDDs

| Part number | Feature | Description | Maximum supported |
|---------------------------------------|---------|--|-------------------|
| 2.5-inch hot-swap HDDs - 6 Gb NL SATA | | | |
| 7XB7A00036 | AUUE | ThinkSystem 2.5" 1TB 7.2K SATA 6Gb Hot Swap 512n HDD | 8 |
| 7XB7A00037 | AUUJ | ThinkSystem 2.5" 2TB 7.2K SATA 6Gb Hot Swap 512e HDD | 8 |

Table 9. 2.5-inch hot-swap 12 Gb SAS SSDs

| Part number | Feature | Description | Maximum supported |
|---|---------|--|-------------------|
| 2.5-inch hot-swap SSDs - 12 Gb SAS - Performance (10+ DWPD) | | | |
| 4XB7A10219 | B4Y4 | ThinkSystem 2.5" SS530 400GB Performance SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A10230 | B4Y5 | ThinkSystem 2.5" SS530 800GB Performance SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A10231 | B4Y6 | ThinkSystem 2.5" SS530 1.6TB Performance SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A10232 | B4Y7 | ThinkSystem 2.5" SS530 3.2TB Performance SAS 12Gb Hot Swap SSD | 8 |
| 7N47A00124 | AUMG | ThinkSystem 2.5" HUSMM32 400GB Performance SAS 12Gb Hot Swap SSD | 8 |
| 2.5-inch hot-swap SSDs - 12 Gb SAS - Mainstream (3-5 DWPD) | | | |
| 4XB7A17062 | B8HU | ThinkSystem 2.5" PM1645a 800GB Mainstream SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A17063 | B8J4 | ThinkSystem 2.5" PM1645a 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 8 |

| Part number | Feature | Description | Maximum supported |
|-------------|---------|---|-------------------|
| 4XB7A17064 | B8JD | ThinkSystem 2.5" PM1645a 3.2TB Mainstream SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A17065 | B8JA | ThinkSystem 2.5" PM1645a 6.4TB Mainstream SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A13653 | B4A0 | ThinkSystem 2.5" PM1645 800GB Mainstream SAS 12Gb Hot Swap SSD | 8 |
| 4XB7A13654 | B4A1 | ThinkSystem 2.5" PM1645 1.6TB Mainstream SAS 12Gb Hot Swap SSD | 8 |

Table 10. 2.5-inch hot-swap 6 Gb SATA SSDs

| Part number | Feature | Description | Maximum supported |
|--|---------|--|-------------------|
| 2.5-inch hot-swap SSDs - 6 Gb SATA - Mainstream (3-5 DWPD) | | | |
| 4XB7A13633 | B49L | ThinkSystem 2.5" Intel S4610 240GB Mainstream SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A13634 | B49M | ThinkSystem 2.5" Intel S4610 480GB Mainstream SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A13635 | B49N | ThinkSystem 2.5" Intel S4610 960GB Mainstream SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A13636 | B49P | ThinkSystem 2.5" Intel S4610 1.92TB Mainstream SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A13637 | B49Q | ThinkSystem 2.5" Intel S4610 3.84TB Mainstream SATA 6Gb Hot Swap SSD | 8 |
| 2.5-inch hot-swap SSDs - 6 Gb SATA - Entry (<3 DWPD) | | | |
| 4XB7A38271 | BCTC | ThinkSystem 2.5" Multi Vendor 240GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A38272 | BCTD | ThinkSystem 2.5" Multi Vendor 480GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A38273 | BCTE | ThinkSystem 2.5" Multi Vendor 960GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A38274 | BCTF | ThinkSystem 2.5" Multi Vendor 1.92TB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A38275 | BCTG | ThinkSystem 2.5" Multi Vendor 3.84TB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A17075 | B8HV | ThinkSystem 2.5" 5300 240GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A17076 | B8JM | ThinkSystem 2.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A17077 | B8HP | ThinkSystem 2.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A17078 | B8J5 | ThinkSystem 2.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A17079 | B8JP | ThinkSystem 2.5" 5300 3.84TB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A10153 | B2X2 | ThinkSystem 2.5" 5200 480GB Entry SATA 6Gb Hot Swap SSD | 8 |
| 4XB7A10154 | B2X3 | ThinkSystem 2.5" 5200 960GB Entry SATA 6Gb Hot Swap SSD | 8 |

Table 11. M.2 SATA drives

| Part number | Feature | Description | Maximum supported |
|--|---------|---|-------------------|
| M.2 SSDs - 6 Gb SATA - Entry (<3 DWPD) | | | |
| 7N47A00130 | AUUV | ThinkSystem M.2 128GB SATA 6Gbps Non-Hot Swap SSD | 2 |

Internal backup units

The server does not supports any internal backup units, such as tape drives or RDX drives.

Optical drives

The server supports the external USB optical drive listed in the following table.

Table 12. External optical drive

| Part number | Feature code | Description |
|-------------|--------------|--|
| 7XA7A05926 | AVV8 | ThinkSystem External USB DVD RW Optical Disk Drive |

The drive is based on the Lenovo Slim DVD Burner DB65 drive and supports the following formats: DVD-RAM, DVD-RW, DVD+RW, DVD+R, DVD-R, DVD-ROM, DVD-R DL, CD-RW, CD-R, CD-ROM.

I/O expansion options

The server supports either:

- Up to 7 front-accessible PCIe slots with four double-wide GPU slots
- Up to 11 front-accessible PCIe slots with eight single-wide GPU slots

The slot count is based on the riser cards selected for the server, as listed in the table below.

The following figures shows the location of the PCIe slots.

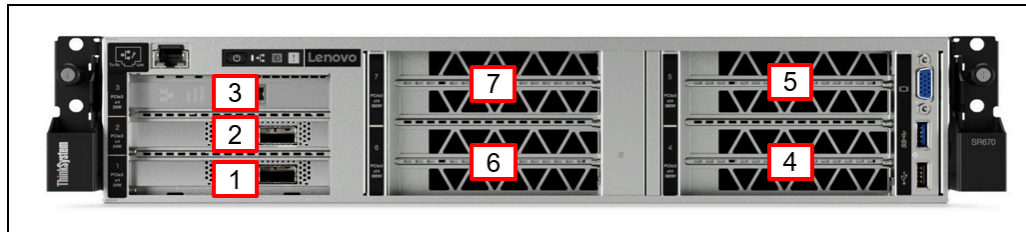


Figure 8.

Location of the PCIe slots (front of the server) - four double-wide GPU slots

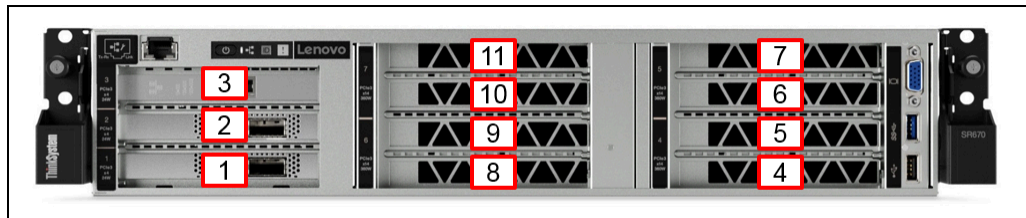


Figure 9.

Location of the PCIe slots (front of the server) - eight single-wide GPU slots

Table 13. Riser card selections

| Feature code | Description | Maximum supported |
|--------------|---|-------------------|
| B3Y8 | ThinkSystem SR670 1-3 Slot PCIe x16 FHFL Riser Kit <ul style="list-style-type: none"> • Provides slots 1-3 when installed in the left bay • Provides two x16 slots 6 & 7 when installed in middle bay • Provides two x16 slots 4 & 5 when installed in the right bay | 3 |
| B6BB | ThinkSystem SR670 4 Slot PCIe x8/x16 FHHL Riser Kit <ul style="list-style-type: none"> • Provides four x8 (x16 physical) slots 8-11 when installed in middle bay • Provides four x8 (x16 physical) slots 4-7 when installed in the right bay | 2 |

The PCIe slots are as follows, including which processor that each slot is connected to:

- Slot 1: PCIe 3.0 x16 (full-height, half-length) (CPU 1)
- Slot 2: PCIe 3.0 x16 (full-height, half-length) (CPU 2)
- Slot 3: PCIe 3.0 x4 (full-height, half-length) (PCH from CPU 1)

With four double-wide GPU slots (riser card B3Y8):

- Slot 4: PCIe 3.0 x16 for a GPU (full-height, full-length, double-width) (CPU 2)
- Slot 5: PCIe 3.0 x16 for a GPU (full-height, full-length, double-width) (CPU 1)
- Slot 6: PCIe 3.0 x16 for a GPU (full-height, full-length, double-width) (CPU 2)

- Slot 7: PCIe 3.0 x16 for a GPU (full-height, full-length, double-width) (CPU 2)

With eight single-wide half-length GPU slots (riser card B6BB):

- Slot 4: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 1)
- Slot 5: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 1)
- Slot 6: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, full-length, single-width) (CPU 1)
- Slot 7: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 1)
- Slot 8: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, full-length, single-width) (CPU 2)
- Slot 9: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 2)
- Slot 10: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 2)
- Slot 11: PCIe 3.0 x8 (x16 physical) for a GPU (full-height, half-length, single-width) (CPU 2)

Network adapters

The SR670 does not have an onboard Ethernet controller.

The following table lists supported network adapters that can be installed in the regular PCIe slots.

Table 14. Supported PCIe Network Adapters

| Part number | Feature code | Description | Slots supported | Maximum supported |
|---|--------------|--|-----------------|-------------------|
| Gigabit Ethernet | | | | |
| 7ZT7A00534 | AUZY | ThinkSystem I350-T2 PCIe 1Gb 2-Port RJ45 Ethernet Adapter | 1,2,3 | 3 |
| 10 Gb Ethernet | | | | |
| 7ZT7A00537 | AUKX | ThinkSystem Intel X710-DA2 PCIe 10Gb 2-Port SFP+ Ethernet Adapter | 1,2 | 2 |
| 100 Gb Ethernet / InfiniBand | | | | |
| 4C57A14177 | B4R9 | ThinkSystem Mellanox ConnectX-6 HDR100/100GbE QSFP56 1-port PCIe VPI Adapter | 1,2 | 1 |
| 4C57A14178 | B4RA | ThinkSystem Mellanox ConnectX-6 HDR100/100GbE QSFP56 2-port PCIe VPI Adapter | 1,2 | 1 |
| 4C57A08980* | B0RM* | Mellanox ConnectX-5 EDR IB VPI Dual-port x16 PCIe 3.0 HCA | 1,2 | 1 |
| 00MM960 | ATRP | Mellanox ConnectX-4 2x100GbE/EDR IB QSFP28 VPI Adapter | 1,2 | 2 |
| 200 Gb Ethernet / HDR InfiniBand | | | | |
| 4C57A15326 | B4RC | ThinkSystem Mellanox ConnectX-6 HDR/200GbE QSFP56 1-port PCIe 4 VPI Adapter | 1 | 1 |
| 4C57A14179 | B4RB | ThinkSystem Mellanox HDR/200GbE 2x PCIe Aux Kit (installs with 4C57A15326 to provide the additional PCIe 3.0 x16 needed for HDR) | 2 | 1 |
| Omni Path Architecture | | | | |
| 00WE027 | AU0B | Intel OPA 100 Series Single-port PCIe 3.0 x16 HFA | 1,2 | 2 |

* Note: This ConnectX-5 adapter is only available to Lenovo customers through LeSI.

For more information, including the transceivers and cables that each adapter supports, see the list of Lenovo Press Product Guides in the Networking adapters category:

<https://lenovopress.com/servers/options/ethernet>

Fibre Channel host bus adapters

The SR670 does not currently support any Fibre Channel adapters.

SAS adapters for external storage

The following table lists the SAS HBA supported by the SR670 server for use with external storage.

Table 15. Adapters for external storage

| Part number | Feature code | Description | Slots supported | Maximum supported |
|-------------|--------------|--------------------------------------|-----------------|-------------------|
| SAS HBAs | | | | |
| 7Y37A01090 | AUNR | ThinkSystem 430-8e SAS/SATA 12Gb HBA | 1, 2 | 1 |

For more information, see the Lenovo Press Product Guides in the Host bus adapter category:

<https://lenovopress.com/servers/options/hba>

The following table lists the specifications of the supported external SAS HBA.

Table 16. Comparison of external storage adapters

| Feature | 430-8e |
|------------------------------------|------------------------|
| Adapter type | HBA |
| Controller chip | LSI SAS3408 |
| Host interface | PCIe 3.0 x8 |
| Port interface | 12 Gb SAS |
| Number of ports | 8 |
| Port connectors | 2x Mini-SAS HD SFF8644 |
| Drive interface | SAS/SATA |
| Drive type | HDD/SSD/SED* |
| Hot-swap drives | Yes |
| Maximum devices | 1024 |
| RAID levels | None |
| JBOD mode | Yes |
| Cache | None |
| CacheVault cache protection | None |
| Performance Accelerator (FastPath) | No |
| SSD Caching (CacheCade Pro 2.0) | No |
| SED support | Yes* |

* SAS HBAs support SEDs (self-encrypting drives) by using software on the server and simply passing SED commands through the HBA to the drives.

Flash storage adapters

The SR670 does not currently support any Flash Storage adapters.

GPU adapters

The SR670 supports the GPUs listed in the following table.

Table 17. GPU adapter support

| Part number | Feature | Description | Slots supported | Maximum supported |
|--|---------|--|-----------------|-------------------|
| Double-wide GPUs - require feature code B3Y8 riser cards | | | | |
| 4X67A13135* | BEL5 | ThinkSystem NVIDIA A100 40GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4X67A72593† | BEL4 | ThinkSystem NVIDIA A40 48GB PCIe Gen4 Passive GPU | 4,5,6,7 | 4‡ |
| 4X67A13124 | BB2E | ThinkSystem NVIDIA Tesla V100S 32GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4X67A12088 | B34S | ThinkSystem NVIDIA Tesla V100 32GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4C57A09498 | B1JY | ThinkSystem NVIDIA Tesla V100 16GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4X67A65441† | BCGR | ThinkSystem NVIDIA Quadro RTX 8000 48GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4X67A13125 | BB2D | ThinkSystem NVIDIA Quadro RTX 6000 24GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 7C57A02888 | B15U | ThinkSystem NVIDIA Tesla P40 24GB PCIe Passive GPU | 4,5,6,7 | 4 |
| 4C57A16224 | B5DN | ThinkSystem SR670 AMD Radeon Instinct MI25 16Gb PCIe Passive GPU | 4,5,6,7 | 4 |
| Single-wide GPUs - require feature code B6BB riser cards | | | | |
| 4X67A14926 | B4YB | ThinkSystem NVIDIA Tesla T4 16GB PCIe Passive GPU | 4-11 | 8 |

* The NVIDIA A100 GPU requires SR670 UEFI firmware Version 2.41 or later. See [Support tip HT511162](#) for details.

† Only available via Lenovo Scalable Infrastructure (LeSI). Select "AI & HPC – LeSI Solutions" in the DCSC configurator. See the [LeSI product guide](#) for details.

‡ The DisplayPort ports on the A40 are not supported when used in the SR670

When fewer than the maximum number of GPUs is installed, you can specify in the CTO factory order how you want the GPUs installed in the slots:

- Distributed GPU Configuration: Indicates that GPUs are populated as equally as possible between the two processors
- Concentrated GPU Configuration: Indicates that GPUs should fully populate all slots connected to CPU 1 first, and then once those slots are consumed, install the slots connected to CPU 2.

For details about these GPUs, consult the ThinkSystem GPU Summary, available from:

<https://lenovopress.com/lp0768-thinksystem-gpu-summary>

For customers that purchase the AMD Radeon Instinct MI25 directly from AMD, the required power cable is not included with the GPU. To use a customer-supplied MI25 GPU with the SR670, order the cable listed in the following table, one for each GPU to be installed.

Table 18. Power cable for AMD GPU (customer-supplied GPU only)

| Part number | Description |
|-------------|---|
| 4Z57A26300 | ThinkSystem SR670 PCIe 6-pin + PCIe 8-pin Power Adapter Cable |

Note: This cable is only for a customer-supplied AMD Radeon Instinct MI25. Option part number 4C57A16224 already includes the cable. The cable is not required for any NVIDIA adapter.

Cooling

The server has six 60 mm simple-swap fans and all six fans are standard in all models. The server offers N+1 fan redundancy, meaning that one fan can fail and the server still operates normally in typical datacenter environments. However, if the ambient temperature is above 27°C and a fan failure occurs, the GPUs may be instructed by the system to enter an emergency power reduction state whereby GPU performance will be impacted.

Each power supply has an integrated fan.

Power supplies

The server includes two 2000W hot-swap redundant power supplies. Both power supplies are standard.

The power supplies form a redundant pair in all server configurations except when the quantity of 250W (or greater) GPUs is three or more. Such GPUs includes the double-wide NVIDIA V100, NVIDIA P40 and AMD MI25 GPUs.

In such configurations, in the event of a single power supply failure, by default the server will proactively throttle the performance of the GPUs. This setting is configurable in UEFI. See the SR670 Information Center for details:

https://pubs.lenovo.com/sr670/gpu_power_braking.html

Table 19. Power supply

| Part number | Feature code | Description | Maximum supported | 110V AC | 220V AC | 240V DC (China) |
|-------------|--------------|------------------------------------|-------------------|---------|---------|-----------------|
| CTO only | B3YC | 2000W Platinum (230V) Power Supply | 2 | No | Yes | No |

Power cords

Line cords and rack power cables can be ordered as listed in the following table.

Table 20. Power cords

| Part number | Feature code | Description |
|--------------------|--------------|---|
| Rack cables | | |
| 00Y3043 | A4VP | 1.0m, 10A/100-250V, C13 to C14 Jumper Cord |
| 39Y7937 | 6201 | 1.5m, 10A/100-250V, C13 to C14 Jumper Cord |
| 4L67A08369 | 6570 | 2.0m, 13A/100-250V, C13 to C14 Jumper Cord |
| 4L67A08366 | 6311 | 2.8m, 10A/100-250V, C13 to C14 Jumper Cord |
| 4L67A08370 | 6400 | 2.8m, 13A/100-250V, C13 to C14 Jumper Cord |
| 39Y7932 | 6263 | 4.3m, 10A/100-250V, C13 to C14 Jumper Cord |
| 4L67A08371 | 6583 | 4.3m, 13A/100-250V, C13 to C14 Jumper Cord |
| Line cords | | |
| 39Y7930 | 6222 | 2.8m, 10A/250V, C13 to IRAM 2073 (Argentina) Line Cord |
| 81Y2384 | 6492 | 4.3m, 10A/250V, C13 to IRAM 2073 (Argentina) Line Cord |
| 39Y7924 | 6211 | 2.8m, 10A/250V, C13 to AS/NZS 3112 (Australia/NZ) Line Cord |
| 81Y2383 | 6574 | 4.3m, 10A/250V, C13 to AS/NZS 3112 (Australia/NZ) Line Cord |
| 69Y1988 | 6532 | 2.8m, 10A/250V, C13 to NBR 14136 (Brazil) Line Cord |
| 81Y2387 | 6404 | 4.3m, 10A/250V, C13 to NBR 14136 (Brazil) Line Cord |
| 39Y7928 | 6210 | 2.8m, 10A/220V, C13 to GB 2099.1 (China) Line Cord |
| 81Y2378 | 6580 | 4.3m, 10A/250V, C13 to GB 2099.1 (China) Line Cord |
| 39Y7918 | 6213 | 2.8m, 10A/250V, C13 to DK2-5a (Denmark) Line Cord |
| 81Y2382 | 6575 | 4.3m, 10A/250V, C13 to DK2-5a (Denmark) Line Cord |
| 39Y7917 | 6212 | 2.8m, 10A/250V, C13 to CEE 7/7 (Europe) Line Cord |
| 81Y2376 | 6572 | 4.3m, 10A/250V, C13 to CEE 7/7 (Europe) Line Cord |
| 39Y7927 | 6269 | 2.8m, 10A/250V, C13 to IS 6538 (India) Line Cord |
| 81Y2386 | 6567 | 4.3m, 10A/250V, C13 to IS 6538 (India) Line Cord |
| 39Y7920 | 6218 | 2.8m, 10A/250V, C13 to SI 32 (Israel) Line Cord |
| 81Y2381 | 6579 | 4.3m, 10A/250V, C13 to SI 32 (Israel) Line Cord |
| 39Y7921 | 6217 | 2.8m, 10A/250V, C13 to CEI 23-16 (Italy) Line Cord |
| 81Y2380 | 6493 | 4.3m, 10A/250V, C13 to CEI 23-16 (Italy) Line Cord |
| 4L67A08362 | 6495 | 4.3m, 12A/200V, C13 to JIS C-8303 (Japan) Line Cord |
| 39Y7922 | 6214 | 2.8m, 10A/250V, C13 to SABS 164-1 (South Africa) Line Cord |
| 81Y2379 | 6576 | 4.3m, 10A/250V, C13 to SANS 164-1 (South Africa) Line Cord |
| 39Y7925 | 6219 | 2.8m, 12A/220V, C13 to KSC 8305 (S. Korea) Line Cord |
| 81Y2385 | 6494 | 4.3m, 12A/250V, C13 to KSC 8305 (S. Korea) Line Cord |
| 39Y7919 | 6216 | 2.8m, 10A/250V, C13 to SEV 1011-S24507 (Swiss) Line Cord |
| 81Y2390 | 6578 | 4.3m, 10A/250V, C13 to SEV 1011-S24507 (Swiss) Line Cord |
| 81Y2375 | 6317 | 2.8m, 10A/250V, C13 to CNS 10917 (Taiwan) Line Cord |
| 81Y2389 | 6531 | 4.3m, 10A/250V, C13 to CNS 10917 (Taiwan) Line Cord |
| 39Y7923 | 6215 | 2.8m, 10A/250V, C13 to BS 1363/A (UK) Line Cord |
| 81Y2377 | 6577 | 4.3m, 10A/250V, C13 to BS 1363/A (UK) Line Cord |

| Part number | Feature code | Description |
|--------------------|---------------------|--|
| 46M2592 | A1RF | 2.8m, 10A/250V, C13 to NEMA 6-15P (US) Line Cord |
| 4L67A08361 | 6373 | 4.3m, 10A/250V, C13 to NEMA 6-15P (US) Line Cord |

Systems management

The SR670 contains an integrated service processor, XClarity Controller (XCC), which provides advanced control, monitoring, and alerting functions. The XCC is based on the Pilot4 XE401 baseboard management controller (BMC) using a dual-core ARM Cortex A9 service processor.

Local management

The SR670 offers a front operator panel with key LED status indicators, as shown in the following figure.

Note: The System Activity LED is not currently being used.

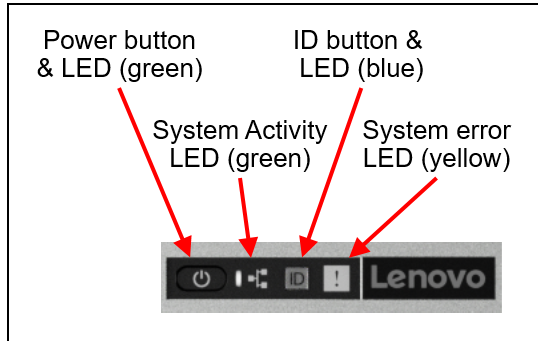


Figure 10. Front operator panel

Remote management

The server offers a dedicated RJ45 port at the rear of the server for remote management via the XClarity Controller management processor. The port supports 10/100/1000 Mbps speeds.

Remote server management is provided through industry-standard interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3 (no SET commands; no SNMP v1)
- Common Information Model (CIM-XML)
- Representational State Transfer (REST) support
- Redfish API Spec v1.0.2 compliant
- Web browser - HTML 5-based browser interface (Java and ActiveX not required) using a responsive design (content optimized for device being used - laptop, tablet, phone) with NLS support
- The server's serial port can be redirected and accessed remotely via IPMI or SSH via XClarity Controller

IPMI via the Ethernet port (IPMI over LAN) is supported, however it is disabled by default. For CTO orders you can specify whether you want the feature enabled or disabled in the factory, using the feature codes listed in the following table.

Table 21. IPMI-over-LAN settings

| Part number | Feature code | Description |
|-------------|--------------|---------------------------------|
| CTO only | B7XZ | Disable IPMI-over-LAN (default) |
| CTO only | B7Y0 | Enable IPMI-over-LAN |

There are two XClarity Controller upgrades available for the server, Advanced and Enterprise.

Lenovo XClarity Controller Advanced adds the following remote control functions:

- Remotely viewing video with graphics resolutions up to 1600x1200 at 75 Hz with up to 23 bits per pixel, regardless of the system state
- Remotely accessing the server using the keyboard and mouse from a remote client
- Capturing blue-screen errors
- International keyboard mapping support
- LDAP-based authentication

Lenovo XClarity Controller Enterprise enables the following additional features:

- Boot Capture
- Remote mounting of CD-ROM (ISO) and diskette (IMG) files as virtual drives
- Virtual console collaboration - Ability for up to 6 remote users to be log into the remote session simultaneously
- Power capping

For configure-to-order (CTO), you can elect to have one of the following XCC functionality by selecting the appropriate XCC feature codes as listed in the following table:

- XCC Standard - select neither feature listed in the table
- XCC Advanced - select feature AVUT
- XCC Enterprise - select feature AUPW

Table 22. XClarity Controller Upgrades for configure-to-order

| Feature code | Description |
|--------------|--|
| AVUT | ThinkSystem XClarity Controller Standard to Advanced Upgrade |
| AUPW | ThinkSystem XClarity Controller Standard to Enterprise Upgrade |

The following table shows the field upgrades available for SR670 servers already deployed.

Table 23. XClarity Controller field upgrades

| Part number | Feature code | Description |
|-------------|--------------|---|
| 4L47A09132 | AVUT | ThinkSystem XClarity Controller Standard to Advanced Upgrade (for servers that have XCC Standard) |
| 4L47A09133 | AVUU | ThinkSystem XClarity Controller Advanced to Enterprise Upgrade (for servers that have XCC Advanced) |

Lenovo XClarity Provisioning Manager

Lenovo XClarity Provisioning Manager (LXPM) is a UEFI-based application embedded in ThinkSystem servers and accessible via the F1 key during system boot.

LXPM provides the following functions:

- Graphical UEFI Setup
- System inventory information and VPD update
- System firmware updates (UEFI and XCC)
- RAID setup wizard
- OS installation wizard (including unattended OS installation)
- Diagnostics functions

Lenovo XClarity Essentials

Lenovo offers the following XClarity Essentials software tools that can help you set up, use, and maintain the server at no additional cost:

- **Lenovo Essentials OneCLI**
OneCLI is a collection of server management tools that uses a command line interface program to manage firmware, hardware, and operating systems. It provides functions to collect full system health information (including health status), configure system settings, and update system firmware and drivers.
- **Lenovo Essentials UpdateXpress**
The UpdateXpress tool is a standalone GUI application for firmware and device driver updates that enables you to maintain your server firmware and device drivers up-to-date and help you avoid unnecessary server outages. The tool acquires and deploys individual updates and UpdateXpress System Packs (UXSPs) which are integration-tested bundles.
- **Lenovo Essentials Bootable Media Creator**
The Bootable Media Creator (BOMC) tool is used to create bootable media for offline firmware update.

For more information and downloads, visit the Lenovo XClarity Essentials web page:

<http://support.lenovo.com/us/en/documents/LNVO-center>

Security

The server offers the following security features:

- Administrator and power-on password
- Trusted Platform Module (TPM) supporting TPM 2.0 (TPM 1.2 support is planned)
- Optional Nationz TPM 2.0, available only in China

The Nationz TPM module is available only for China customers and is installed in a dedicated socket on the system board, as shown in [Figure 4](#).

Table 24. Security features

| Part number | Feature code | Description |
|-------------|--------------|---|
| None* | B22N | ThinkSystem Nationz Trusted Platform Module v2.0 (China customers only) |

* Not available as a field upgrade. The component is configure to order only.

Rack installation

The SR670 supports a slide rail kit, however a cable management arm is not available. The following table lists ordering information.

Table 25. Rack Kit ordering information

| Option | Feature Code | Description |
|-------------|--------------|------------------------------|
| Rail slides | | |
| CTO only* | B47V | ThinkSystem SR670 Slide Rail |

* Only available as part of a configure-to-order (CTO) configuration. Not currently available as a separate option.

The following figure shows the Slide Rail kit.

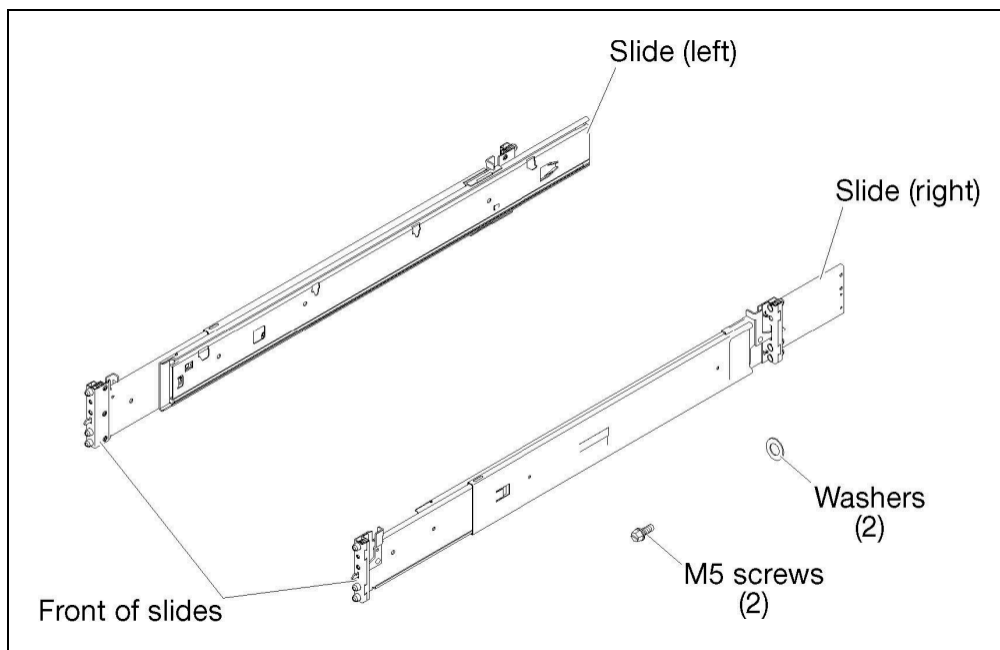


Figure 11.

ThinkSystem SR670 Slide Rail

Operating system support

The SR670 with first-generation Intel Xeon Scalable processors supports the following operating systems:

- Microsoft Windows Server 2022
- Red Hat Enterprise Linux 7.5
- Red Hat Enterprise Linux 7.7
- Red Hat Enterprise Linux 7.8
- Red Hat Enterprise Linux 7.9
- Red Hat Enterprise Linux 8.1
- Red Hat Enterprise Linux 8.2
- Red Hat Enterprise Linux 8.3
- Red Hat Enterprise Linux 8.4
- Red Hat Enterprise Linux 8.5
- Red Hat Enterprise Linux 8.6
- Red Hat Enterprise Linux 8.7
- Red Hat Enterprise Linux 8.8
- Red Hat Enterprise Linux 9.0
- Red Hat Enterprise Linux 9.1
- Red Hat Enterprise Linux 9.2
- SUSE Linux Enterprise Server 12 SP5
- SUSE Linux Enterprise Server 12 Xen SP5
- SUSE Linux Enterprise Server 15 SP1
- SUSE Linux Enterprise Server 15 SP2
- SUSE Linux Enterprise Server 15 SP3
- SUSE Linux Enterprise Server 15 SP4
- SUSE Linux Enterprise Server 15 SP5
- SUSE Linux Enterprise Server 15 Xen SP1
- SUSE Linux Enterprise Server 15 Xen SP2
- SUSE Linux Enterprise Server 15 Xen SP3
- SUSE Linux Enterprise Server 15 Xen SP4
- SUSE Linux Enterprise Server 15 Xen SP5
- Ubuntu 22.04 LTS 64-bit
- VMware ESXi 7.0
- VMware ESXi 7.0 U1
- VMware ESXi 7.0 U2
- VMware ESXi 7.0 U3
- VMware ESXi 8.0
- VMware ESXi 8.0 U1
- VMware ESXi 8.0 U2
- VMware ESXi 8.0 U3

For a complete list of supported, certified and tested operating systems, plus additional details and links to relevant web sites, see the Operating System Interoperability Guide:

<https://lenovopress.com/osig#servers=sr670-7y36-7y37-7y38-sp-gen-2>

For configure-to-order configurations, the server can be preloaded with VMware ESXi. Ordering information is listed in the following table.

Table 26. VMware ESXi preload

| Part number | Feature code | Description |
|-------------|--------------|--|
| CTO only | B88T | VMware ESXi 6.7 U3 (factory installed) |
| CTO only | BBZG | VMware ESXi 7.0 (Factory Installed) |

| Part number | Feature code | Description |
|--------------------|---------------------|--|
| CTO only | BE5E | VMware ESXi 7.0 U1 (Factory Installed) |

Physical and electrical specifications

The SR670 has the following overall physical dimensions, excluding components that extend outside the standard chassis, such as EIA flanges, front security bezel (if any), and power supply handles:

- Width: 448 mm (17.6 inches)
- Height: 87 mm (3.4 inches)
- Depth: 906 mm (35.7 inches)

The following table lists the detailed dimensions. See the figure below for the definition of each dimension.

Table 27. Detailed dimensions

| Dimension | Description |
|-----------|--|
| 488 mm | X_a = Width, to the outsides of the front EIA flanges |
| 435 mm | X_b = Width, to the rack rail mating surfaces |
| 448 mm | X_c = Width, to the outer most chassis body feature |
| 87 mm | Y_a = Height, from the bottom of chassis to the top of the chassis |
| N/A | Z_a = Depth, from the rack flange mating surface to the rearmost I/O port surface |
| 872 mm | Z_b = Depth, from the rack flange mating surface to the rearmost feature of the chassis body |
| 899 mm | Z_c = Depth, from the rack flange mating surface to the rearmost feature such as power supply handle |
| 34 mm | Z_d = Depth, from the forwardmost feature on front of EIA flange to the rack flange mating surface |
| 21 mm | Z_e = Depth, from the front of security bezel (if applicable) or forwardmost feature to the rack flange mating surface |

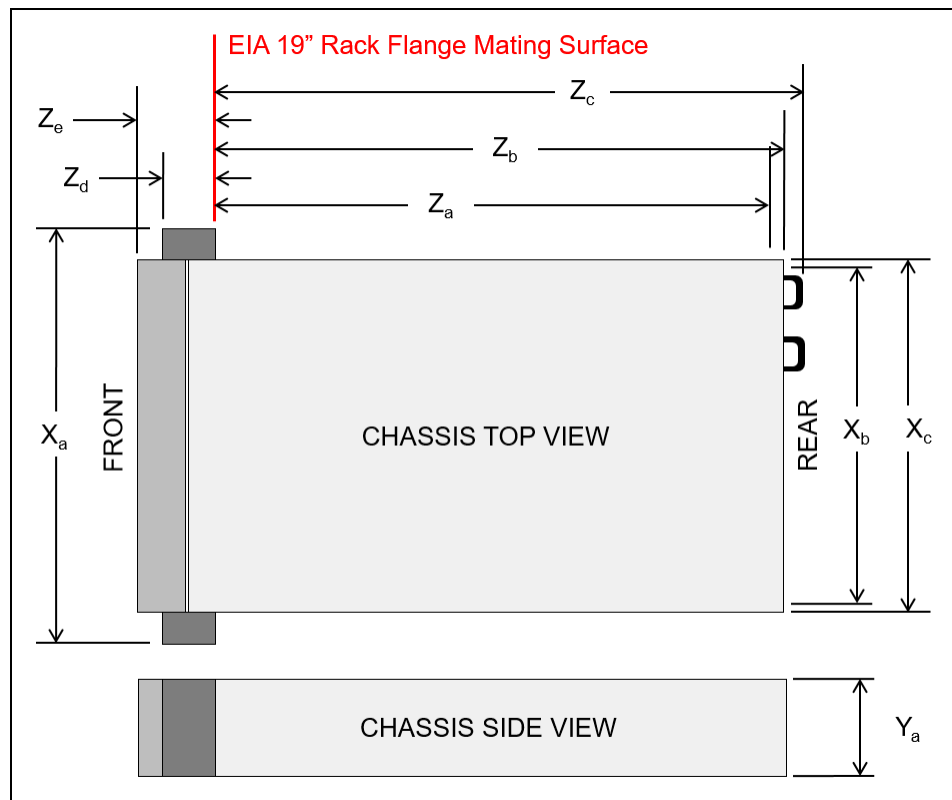


Figure 12. Server dimensions

The shipping (cardboard packaging) dimensions of the SR670 are as follows:

- Width: 592 mm (23.3 inches)
- Height: 292 mm (11.5 inches)
- Depth: 1095 mm (43.1 inches)

Weight:

- 32 kg (71.9 lb) depending on the specific configuration

Electrical specifications:

- Input voltage
 - 200 - 240 (nominal) V AC, 50 Hz or 60 Hz
- With 2000 W AC power supplies:
 - 200 - 240 (nominal) V AC; 50 Hz or 60 Hz; 9.9 A
 - Input kilovolt-amperes (kVA) (approximately):
 - Minimum configuration: 0.746 kVA
 - Maximum configuration: 2.04 kVA

Operating environment

The ThinkSystem SR670 server complies with ASHRAE Class A2 specifications.

The server is supported in the following environment:

- Air temperature:
 - Operating: ASHRAE Class A2, 10°C to 35°C (50°F to 95°F)
 - The maximum ambient temperature decreases by 1°C for every 300 m (984 ft) increase in altitude above 900 m (2,953 ft)
 - Server off: 5°C to 45°C (41°F to 113°F)
 - Shipment/storage: -40°C to 70°C (-40°F to 158°F)
- Maximum altitude: 5000 m (16,400 ft)
- Relative Humidity (non-condensing):
 - Operating: ASHRAE A2, 8% to 80%; maximum dew point: 21°C (70°F)
 - Shipment/storage: 5% to 95%

The server generates the following heat and noise:

- Heat/thermal output:
 - Minimum configuration: 2544 BTU/hr, 746W
 - Maximum configuration: 6963 BTU/hr, 2042W
- Noise levels (see notes below):
 - Sound power, idling: 7.0 bels
 - Sound power, operating (typical workload): 7.5 bels
 - Sound power, operating (maximum workload): 8.5 bels

The server has the following vibration and shock limits:

- Vibration:
 - Operating: 0.21 G rms at 5 Hz to 500 Hz for 15 minutes across 3 axes
 - Non-operating: 1.04 G rms at 2 Hz to 200 Hz for 15 minutes across 6 surfaces
- Shock:
 - Operating: 15 G for 3 milliseconds in each direction (positive and negative X, Y, and Z axes)
 - Non-operating: 23 kg - 31 kg: 35 G for 152 in./sec velocity change across 6 surfaces

Notes regarding noise levels:

- These sound levels were measured in controlled acoustical environments according to procedures specified by ISO7779 and are reported in accordance with ISO 9296.
- The declared acoustic noise levels are based on specified configurations, which may change slightly depending on configuration/conditions.
- Government regulations (such as those prescribed by OSHA or European Community Directives) may govern noise level exposure in the workplace and may apply to you and your server installation. The actual sound pressure levels in your installation depend upon a variety of factors, including the number of racks in the installation, the size, materials, and configuration of the room, the noise levels from other equipment, the room ambient temperature, and employees' location in relation to the equipment. Further, compliance with such government regulations also depends upon a variety of additional factors, including the duration of employees' exposure and whether employees wear hearing protection. Lenovo recommends that you consult with qualified experts in this field to determine whether you are in compliance with the applicable regulations.

Warranty upgrades and post-warranty support

The SR670 has a 1-year or 3-year warranty based on the machine type of the system. It is also available without any warranty.

- 7Y36 - 1 year warranty
- 7Y37 - 3 year warranty
- 7Y38 - No warranty

Our global network of regional support centers offers consistent, local-language support enabling you to vary response times and level of service* to match the criticality of your support needs:

- **Standard Next Business Day** – Best choice for non-essential systems requiring simple maintenance.
- **Premier Next Business Day** – Best choice for essential systems requiring technical expertise from senior-level Lenovo engineers.
- **Premier 24x7 4-Hour Response** – Best choice for systems where maximum uptime is critical.
- **Premier Enhanced Storage Support 24x7 4-Hour Response** – Best choice for storage systems where maximum uptime is critical.

For more information, consult the brochure [Lenovo Operational Support Services for Data Centers Services](#).

* Some service levels may not be available in all markets. Contact your sales representative for more information.

Services

Lenovo Data Center Services empower you at every stage of your IT lifecycle. From expert advisory and strategic planning to seamless deployment and ongoing support, we ensure your infrastructure is built for success. Our comprehensive services accelerate time to value, minimize downtime, and free your IT staff to focus on driving innovation and business growth.

Note: Some service options may not be available in all markets or regions. For more information, go to <https://lenovocator.com/>. For information about Lenovo service upgrade offerings that are available in your region, contact your local Lenovo sales representative or business partner.

In this section:

- [Lenovo Advisory Services](#)

- [Lenovo Plan & Design Services](#)
- [Lenovo Deployment, Migration, and Configuration Services](#)
- [Lenovo Support Services](#)
- [Lenovo Managed Services](#)
- [Lenovo Sustainability Services](#)

Lenovo Advisory Services

Lenovo Advisory Services simplify the planning process, enabling customers to build future-proofed strategies in as little as six weeks. Consultants provide guidance on projects including VM migration, storage, backup and recovery, and cost management to accelerate time to value, improve cost efficiency, and build a flexibly scalable foundation.

- **Assessment Services**

An Assessment helps solve your IT challenges through an onsite, multi-day session with a Lenovo technology expert. We perform a tools-based assessment which provides a comprehensive and thorough review of a company's environment and technology systems. In addition to the technology based functional requirements, the consultant also discusses and records the non-functional business requirements, challenges, and constraints. Assessments help organizations like yours, no matter how large or small, get a better return on your IT investment and overcome challenges in the ever-changing technology landscape.

- **Design Services**

Professional Services consultants perform infrastructure design and implementation planning to support your strategy. The high-level architectures provided by the assessment service are turned into low level designs and wiring diagrams, which are reviewed and approved prior to implementation. The implementation plan will demonstrate an outcome-based proposal to provide business capabilities through infrastructure with a risk-mitigated project plan.

Lenovo Plan & Design Services

Unlock faster time to market with our tailored, strategic design workshops to align solution approaches with your business goals and technical requirements. Leverage our deep solution expertise and end-to-end delivery partnership to meet your goals efficiently and effectively.

Lenovo Deployment, Migration, and Configuration Services

Optimize your IT operations by shifting labor-intensive functions to Lenovo's skilled technicians for seamless on-site or remote deployment, configuration, and migration. Enjoy peace of mind, faster time to value, and comprehensive knowledge sharing with your IT staff, backed by our best-practice methodology.

- **Deployment Services for Storage and ThinkAgile**

A comprehensive range of remote and onsite options tailored specifically for your business needs to ensure your storage and ThinkAgile hardware are fully operational from the start.

- **Hardware Installation Services**

A full-range, comprehensive setup for your hardware, including unpacking, inspecting, and positioning components to ensure your equipment is operational and error-free for the most seamless and efficient installation experience, so you can quickly benefit from your investments.

- **DM/DG File Migration Services**

Take the burden of file migration from your IT's shoulders. Our experts will align your requirements and business objectives to the migration plans while coordinating with your team to plan and safely execute the data migration to your storage platforms.

- **DM/DG/DE Health Check Services**

Our experts perform proactive checks of your Firmware and system health to ensure your machines are operating at peak and optimal efficiency to maximize up-time, avoid system failures, ensure the security of IT solutions and simplify maintenance.

- **Factory Integrated Services**

A suite of value-added offerings provided during the manufacturing phase of a server or storage system that reduces time to value. These services aim at improving your hardware deployment experience and enhance the quality of a standard configuration before it arrives at your facility.

Lenovo Support Services

In addition to response time options for hardware parts, repairs, and labor, Lenovo offers a wide array of additional support services to ensure your business is positioned for success and longevity. Our goal is to reduce your capital outlays, mitigate your IT risks, and accelerate your time to productivity.

- **Premier Support for Data Centers**

Your direct line to the solution that promises the best, most comprehensive level of support to help you fully unlock the potential of your data center.

- **Premier Enhanced Storage Support (PESS)**

Gain all the benefits of Premier Support for Data Centers, adding dedicated storage specialists and resources to elevate your storage support experience to the next level.

- **Committed Service Repair (CSR)**

Our commitment to ensuring the fastest, most seamless resolution times for mission-critical systems that require immediate attention to ensure minimal downtime and risk for your business. This service is only available for machines under the Premier 4-Hour Response SLA.

- **Multivendor Support Services (MVS)**

Your single point of accountability for resolution support across vast range of leading Server, Storage, and Networking OEMs, allowing you to manage all your supported infrastructure devices seamlessly from a single source.

- **Keep Your Drive (KYD)**

Protect sensitive data and maintain compliance with corporate retention and disposal policies to ensure your data is always under your control, regardless of the number of drives that are installed in your Lenovo server.

- **Technical Account Manager (TAM)**

Your single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time, ensuring smooth operations and optimized performance as your business grows.

- **Enterprise Software Support (ESS)**

Gain comprehensive, single-source, and global support for a wide range of server operating systems and Microsoft server applications.

For more information, consult the brochure [Lenovo Operational Support Services for Data Centers](#).

Lenovo Managed Services

Achieve peak efficiency, high security, and minimal disruption with Lenovo's always-on Managed Services. Our real-time monitoring, 24x7 incident response, and problem resolution ensure your infrastructure operates seamlessly. With quarterly health checks for ongoing optimization and innovation, Lenovo's

remote active monitoring boosts end-user experience and productivity by keeping your data center's hardware performing at its best.

Lenovo Managed Services provides continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of your data center using state-of-the-art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware & OS device driver levels, and software as needed. We'll also maintain records of latest patches, critical updates, and firmware levels, to ensure you systems are providing business value through optimized performance.

Lenovo Sustainability Services

- **Asset Recovery Services**

Lenovo Asset Recovery Services (ARS) provides a secure, seamless solution for managing end-of-life IT assets, ensuring data is safely sanitized while contributing to a more circular IT lifecycle. By maximizing the reuse or responsible recycling of devices, ARS helps businesses meet sustainability goals while recovering potential value from their retired equipment. For more information, see the [Asset Recovery Services offering page](#).

- **CO2 Offset Services**

Lenovo's CO2 Offset Services offer a simple and transparent way for businesses to take tangible action on their IT footprint. By integrating CO2 offsets directly into device purchases, customers can easily support verified climate projects and track their contributions, making meaningful progress toward their sustainability goals without added complexity.

- **Lenovo Certified Refurbished**

Lenovo Certified Refurbished offers a cost-effective way to support IT circularity without compromising on quality and performance. Each device undergoes rigorous testing and certification, ensuring reliable performance and extending its lifecycle. With Lenovo's trusted certification, you gain peace of mind while making a more sustainable IT choice.

Lenovo TruScale

Lenovo TruScale XaaS is your set of flexible IT services that makes everything easier. Streamline IT procurement, simplify infrastructure and device management, and pay only for what you use – so your business is free to grow and go anywhere.

Lenovo TruScale is the unified solution that gives you simplified access to:

- The industry's broadest portfolio – from pocket to cloud – all delivered as a service
- A single-contract framework for full visibility and accountability
- The global scale to rapidly and securely build teams from anywhere
- Flexible fixed and metered pay-as-you-go models with minimal upfront cost
- The growth-driving combination of hardware, software, infrastructure, and solutions – all from one single provider with one point of accountability.

For information about Lenovo TruScale offerings that are available in your region, contact your local Lenovo sales representative or business partner.

Regulatory compliance

The SR670 server conforms to the following standards:

- Energy Star v2.1
- FCC: Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, issue 6, Class A
- UL/IEC 60950-1
- UL/IEC 62368-1
- CSA C22.2 No. 60950-1
- Japan VCCI, Class A
- Australia/New Zealand AS/NZS CISPR 32, Class A; AS/NZS 60950.1
- IEC 60950-1 (CB Certificate and CB Test Report)
- IEC 62368-1 (CB Certificate and CB Test Report)
- China CCC (GB4943.1), GB9254 Class A, GB17625.1
- Taiwan BSMI CNS13438, Class A; CNS14336-1
- Korea KN32, Class A; KN35
- Russia, Belorussia and Kazakhstan, EAC: TP TC 004/2011(for Safety); TP TC 020/2011(for EMC)
- CE Mark (EN55032 Class A, EN60950-1, EN55024, EN61000-3-2, and EN61000-3-3)
- CISPR 32, Class A
- TUV-GS (EN60950-1 /IEC60950-1, EK1-ITB2000)

External drive enclosures

The server supports attachment to external drive enclosures using a RAID controller with external ports or a SAS host bus adapter. Adapters supported by the server are listed in the [SAS adapters for external storage](#) section.

Note: Information provided in this section is for ordering reference purposes only. For the operating system and adapter support details, refer to the interoperability matrix for a particular storage enclosure that can be found on the Lenovo Data Center Support web site:

<http://datacentersupport.lenovo.com>

Table 28. External drive enclosures

| Model | Description |
|------------|--|
| 4587HC1 | Lenovo Storage D1212 Disk Expansion Enclosure (2U enclosure with 12x LFF drive bays) |
| 4587HC2 | Lenovo Storage D1224 Disk Expansion Enclosure (2U enclosure with 24x SFF drive bays) |
| 6413HC1 | Lenovo Storage D3284 High Density Expansion Enclosure (5U enclosure with 84x LFF drive bays) |
| 7DAHCTO1WW | Lenovo ThinkSystem D4390 Direct Attached Storage (4U enclosure with 90x LFF drive bays) |

For details about supported drives, adapters, and cables, see the following Lenovo Press Product Guides:

- Lenovo Storage D1212 and D1224
<http://lenovopress.lenovo.com/lp0512>
- Lenovo Storage D3284
<http://lenovopress.lenovo.com/lp0513>
- Lenovo ThinkSystem D4390
<https://lenovopress.lenovo.com/lp1681>

Top-of-rack Ethernet switches

The PCIe slots in the SR670 are all front-accessible. This means that top-of-rack networking switches would normally be installed at the front of the rack and all switches would have front-to-rear airflow (Opposite Port Side Exhaust or oPSE).

The server supports the top-of-rack Ethernet switches that are listed in the following table. These switches have front-to-rear (reverse) airflow for use with servers where the networking ports are at the front of the server.

Table 29. Top-of-rack switches

| Part number | Description |
|-----------------------------|---|
| 1 Gb top-of-rack switches | |
| 7Y810012WW | Lenovo ThinkSystem NE0152T RackSwitch (Front to Rear) |
| 715952F | Lenovo RackSwitch G8052 (Front to Rear) |
| 10 Gb top-of-rack switches | |
| 7159A2X | Lenovo ThinkSystem NE1032 RackSwitch (Front to Rear) |
| 7159B2X | Lenovo ThinkSystem NE1032T RackSwitch (Front to Rear) |
| 7159C2X | Lenovo ThinkSystem NE1072T RackSwitch (Front to Rear) |
| 715964F | Lenovo RackSwitch G8264 (Front to Rear) |
| 7159DFX | Lenovo RackSwitch G8264CS (Front to Rear) |
| 7159CFV | Lenovo RackSwitch G8272 (Front to Rear) |
| 7159GR5 | Lenovo RackSwitch G8296 (Front to Rear) |
| 7159BF7 | Lenovo RackSwitch G8124E (Front to Rear) |
| 25 Gb top-of-rack switches | |
| 7159E2X | Lenovo ThinkSystem NE2572 RackSwitch (Front to Rear) |
| 40 Gb top-of-rack switches | |
| 7159BFX | Lenovo RackSwitch G8332 (Front to Rear) |
| 100 Gb top-of-rack switches | |
| 7159D2X | Lenovo ThinkSystem NE10032 RackSwitch (Front to Rear) |

For more information, see the list of Product Guides in the Top-of-rack switches categories:

- 1 Gb Ethernet switches: <http://lenovopress.com/networking/tor/1gb?rt=product-guide>
- 10 Gb Ethernet switches: <http://lenovopress.com/networking/tor/10gb?rt=product-guide>
- 25 Gb Ethernet switches: <https://lenovopress.com/networking/tor/25gb?rt=product-guide>
- 40 Gb Ethernet switches: <http://lenovopress.com/networking/tor/40gb?rt=product-guide>
- 100 Gb Ethernet switches: <https://lenovopress.com/networking/tor/100Gb?rt=product-guide>

If desired, switches with traditional air flow (rear to front) can also be used, with such switches installed at the rear of the rack and cables routed to the front of the rack to connect to the network ports of the SR670 server.

The following table lists the Ethernet LAN switches that are offered by Lenovo.

Table 30. Ethernet LAN switches

| Part number | Description |
|--------------------------------------|--|
| 1 Gb Ethernet Rack switches | |
| 7Y810011WW | Lenovo ThinkSystem NE0152T RackSwitch (Rear to Front) |
| 7Z320O11WW | Lenovo ThinkSystem NE0152TO RackSwitch (Rear to Front, ONIE) |
| 7159BAX | Lenovo RackSwitch G7028 (Rear to Front) |
| 7159CAX | Lenovo RackSwitch G7052 (Rear to Front) |
| 7159G52 | Lenovo RackSwitch G8052 (Rear to Front) |
| 7165H1X | Juniper EX2300-C PoE Switch |
| 7165H2X | Juniper EX2300-24p PoE Switch |
| 1 Gb Ethernet Campus switches | |
| 7Z340011WW | Lenovo CE0128TB Switch (3-Year Warranty) |
| 7Z360011WW | Lenovo CE0128TB Switch (Limited Lifetime Warranty) |
| 7Z340012WW | Lenovo CE0128PB Switch (3-Year Warranty) |
| 7Z360012WW | Lenovo CE0128PB Switch (Limited Lifetime Warranty) |
| 7Z350021WW | Lenovo CE0152TB Switch (3-Year Warranty) |
| 7Z370021WW | Lenovo CE0152TB Switch (Limited Lifetime Warranty) |
| 7Z350022WW | Lenovo CE0152PB Switch (3-Year Warranty) |
| 7Z370022WW | Lenovo CE0152PB Switch (Limited Lifetime Warranty) |
| 10 Gb Ethernet switches | |
| 7159A1X | Lenovo ThinkSystem NE1032 RackSwitch (Rear to Front) |
| 7159B1X | Lenovo ThinkSystem NE1032T RackSwitch (Rear to Front) |
| 7Z330O11WW | Lenovo ThinkSystem NE1064TO RackSwitch (Rear to Front, ONIE) |
| 7159C1X | Lenovo ThinkSystem NE1072T RackSwitch (Rear to Front) |
| 7159CRW | Lenovo RackSwitch G8272 (Rear to Front) |
| 7159GR6 | Lenovo RackSwitch G8296 (Rear to Front) |
| 7159BR6 | Lenovo RackSwitch G8124E (Rear to Front) |
| 25 Gb Ethernet switches | |
| 7159E1X | Lenovo ThinkSystem NE2572 RackSwitch (Rear to Front) |
| 7Z210O21WW | Lenovo ThinkSystem NE2572O RackSwitch (Rear to Front, ONIE) |
| 7Z330O21WW | Lenovo ThinkSystem NE2580O RackSwitch (Rear to Front, ONIE) |
| 100 Gb Ethernet switches | |
| 7159D1X | Lenovo ThinkSystem NE10032 RackSwitch (Rear to Front) |
| 7Z210O11WW | Lenovo ThinkSystem NE10032O RackSwitch (Rear to Front, ONIE) |

For more information, see the list of Product Guides in the following switch categories:

- 1 Gb Ethernet switches: <http://lenovopress.com/networking/tor/1gb?rt=product-guide>
- 10 Gb Ethernet switches: <http://lenovopress.com/networking/tor/10gb?rt=product-guide>
- 25 Gb Ethernet switches: <http://lenovopress.com/networking/tor/25gb?rt=product-guide>
- 40 Gb Ethernet switches: <http://lenovopress.com/networking/tor/40gb?rt=product-guide>
- 100 Gb Ethernet switches: <https://lenovopress.com/networking/tor/100Gb?rt=product-guide>

Uninterruptible power supply units

The following table lists the uninterruptible power supply (UPS) units that are offered by Lenovo.

Table 31. Uninterruptible power supply units

| Part number | Description |
|--|--|
| Rack-mounted or tower UPS units - 200-240VAC | |
| 7DD5A002WW | RT1.5kVA 2U Rack or Tower UPS-G2 (200-240VAC) |
| 55941KX | RT1.5kVA 2U Rack or Tower UPS (200-240VAC) |
| 55942KX | RT2.2kVA 2U Rack or Tower UPS (200-240VAC) |
| 7DD5A005WW | RT3kVA 2U Rack or Tower UPS-G2 (200-240VAC) |
| 55943KX | RT3kVA 2U Rack or Tower UPS (200-240VAC) |
| 7DD5A007WW | RT5kVA 3U Rack or Tower UPS-G2 (200-240VAC) |
| 55945KX | RT5kVA 3U Rack or Tower UPS (200-240VAC) |
| 7DD5A008WW | RT6kVA 3U Rack or Tower UPS-G2 (200-240VAC) |
| 55946KX | RT6kVA 3U Rack or Tower UPS (200-240VAC) |
| 55948KX | RT8kVA 6U Rack or Tower UPS (200-240VAC) |
| 7DD5A00AWW | RT11kVA 6U Rack or Tower UPS-G2 (200-240VAC) |
| 55949KX | RT11kVA 6U Rack or Tower UPS (200-240VAC) |
| 55943KT† | ThinkSystem RT3kVA 2U Standard UPS (200-230VAC) (2x C13 10A, 2x GB 10A, 1x C19 16A outlets) |
| 55943LT† | ThinkSystem RT3kVA 2U Long Backup UPS (200-230VAC) (2x C13 10A, 2x GB 10A, 1x C19 16A outlets) |
| 55946KT† | ThinkSystem RT6kVA 5U UPS (200-230VAC) (2x C13 10A outlets, 1x Terminal Block output) |
| 5594XKT† | ThinkSystem RT10kVA 5U UPS (200-230VAC) (2x C13 10A outlets, 1x Terminal Block output) |
| Rack-mounted or tower UPS units - 380-415VAC | |
| 55948PX | RT8kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC) |
| 55949PX | RT11kVA 6U 3:1 Phase Rack or Tower UPS (380-415VAC) |

† Only available in China and the Asia Pacific market.

For more information, see the list of Product Guides in the UPS category:

<https://lenovopress.com/servers/options/ups>

Power distribution units

The following table lists the power distribution units (PDUs) that are offered by Lenovo.

Table 32. Power distribution units

| Part number | Feature code | Description | ANZ | ASEAN | Brazil | EET | MEA | RUCIS | WE | HTK | INDIA | JAPAN | LA | NA | PRC |
|---------------------------------------|--------------|--|-----|-------|--------|-----|-----|-------|----|-----|-------|-------|----|----|-----|
| 0U Basic PDUs | | | | | | | | | | | | | | | |
| 4PU7A93176 | C0QH | 0U 36 C13 and 6 C19 Basic 32A 1 Phase PDU v2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 4PU7A93169 | C0DA | 0U 36 C13 and 6 C19 Basic 32A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 4PU7A93177 | C0QJ | 0U 24 C13/C15 and 24 C13/C15/C19 Basic 32A 3 Phase WYE PDU v2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A93170 | CBVF | 0U 24 C13/C15 and 24 C13/C15/C19 Basic 32A 3 Phase WYE PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 00YJ776 | ATZY | 0U 36 C13/6 C19 24A 1 Phase PDU | N | Y | Y | N | N | N | N | N | N | Y | Y | Y | N |
| 00YJ779 | ATZX | 0U 21 C13/12 C19 48A 3 Phase PDU | N | N | Y | N | N | N | Y | N | N | Y | Y | Y | N |
| 00YJ777 | ATZZ | 0U 36 C13/6 C19 32A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | N | Y | Y |
| 00YJ778 | AU00 | 0U 21 C13/12 C19 32A 3 Phase PDU | Y | Y | N | Y | Y | Y | Y | Y | Y | N | N | Y | Y |
| 0U Switched and Monitored PDUs | | | | | | | | | | | | | | | |
| 4PU7B08148 | CD15 | 0U 3 C13 and 18 C19 Monitored 48A 3 Phase WYE PDU | N | N | N | N | N | N | N | N | N | N | N | Y | N |
| 4PU7B08149 | CD16 | 0U 3 C13 and 18 C19 Monitored 63A 3 Phase WYE PDU | N | N | N | Y | N | N | Y | N | N | N | N | N | N |
| 4PU7A93181 | C0QN | 0U 21 C13/C15 and 21 C13/C15/C19 Switched and Monitored 48A 3 Phase Delta PDU v2 (60A derated) | N | Y | N | N | N | N | N | Y | N | Y | N | Y | N |
| 4PU7A93174 | CBVJ | 0U 21 C13/C15 and 21 C13/C15/C19 Switched and Monitored 60A 3 Phase Delta PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A93178 | C0QK | 0U 20 C13 and 4 C19 Switched and Monitored 32A 1 Phase PDU v2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 4PU7A93171 | C0D8 | 0U 20 C13 and 4 C19 Switched and Monitored 32A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 4PU7A93182 | C0QP | 0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 63A 3 Phase WYE PDU v2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A93175 | C0CS | 0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 63A 3 Phase WYE PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 4PU7A93180 | C0QM | 0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 32A 3 Phase WYE PDU v2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A93173 | CBVH | 0U 18 C13/C15 and 18 C13/C15/C19 Switched and Monitored 32A 3 Phase WYE PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A93179 | C0QL | 0U 16 C13/C15 and 16 C13/C15/C19 Switched and Monitored 24A 1 Phase PDU v2 (30A derated) | N | Y | N | N | N | N | N | Y | N | Y | Y | Y | N |
| 4PU7A93172 | CBVG | 0U 16 C13/C15 and 16 C13/C15/C19 Switched and Monitored 30A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |

| Part number | Feature code | Description | ANZ | ASEAN | Brazil | EET | MEA | RUCIS | WE | HTK | INDIA | JAPAN | LA | NA | PRC |
|---|--------------|--|-----|-------|--------|-----|-----|-------|----|-----|-------|-------|----|----|-----|
| 00YJ783 | AU04 | 0U 12 C13/12 C19 Switched and Monitored 48A 3 Phase PDU | N | N | Y | N | N | N | Y | N | N | Y | Y | Y | N |
| 00YJ781 | AU03 | 0U 20 C13/4 C19 Switched and Monitored 24A 1 Phase PDU | N | N | Y | N | Y | N | Y | N | N | Y | Y | Y | N |
| 00YJ782 | AU02 | 0U 18 C13/6 C19 Switched and Monitored 32A 3 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | N | Y |
| 00YJ780 | AU01 | 0U 20 C13/4 C19 Switched and Monitored 32A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | N | Y |
| 1U Basic PDUs | | | | | | | | | | | | | | | |
| 4PU7B12339 | CE6L | 1U Basic 16A 1 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y | Y | Y |
| 1U Switched and Monitored PDUs | | | | | | | | | | | | | | | |
| 4PU7A90808 | C0D4 | 1U 18 C19/C13 Switched and monitored 48A 3P WYE PDU V2 ETL | N | N | N | N | N | N | N | Y | N | Y | Y | Y | N |
| 4PU7A81117 | BNDV | 1U 18 C19/C13 switched and monitored 48A 3P WYE PDU - ETL | N | N | N | N | N | N | N | N | N | N | N | Y | N |
| 4PU7A90809 | C0DE | 1U 18 C19/C13 Switched and monitored 48A 3P WYE PDU V2 CE | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y |
| 4PU7A81118 | BNDW | 1U 18 C19/C13 switched and monitored 48A 3P WYE PDU – CE | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | N | Y |
| 4PU7A90810 | C0DD | 1U 18 C19/C13 Switched and monitored 80A 3P Delta PDU V2 | N | N | N | N | N | N | N | Y | N | Y | Y | Y | N |
| 4PU7A77467 | BLC4 | 1U 18 C19/C13 Switched and Monitored 80A 3P Delta PDU | N | N | N | N | N | N | N | N | N | Y | N | Y | N |
| 4PU7A90811 | C0DC | 1U 12 C19/C13 Switched and monitored 32A 3P WYE PDU V2 | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A77468 | BLC5 | 1U 12 C19/C13 switched and monitored 32A 3P WYE PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 4PU7A90812 | C0DB | 1U 12 C19/C13 Switched and monitored 60A 3P Delta PDU V2 | N | N | N | N | N | N | N | Y | N | Y | Y | Y | N |
| 4PU7A77469 | BLC6 | 1U 12 C19/C13 switched and monitored 60A 3P Delta PDU | N | N | N | N | N | N | N | N | N | N | N | Y | N |
| 46M4002 | 5896 | 1U 9 C19/3 C13 Switched and Monitored DPI PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 46M4004 | 5894 | 1U 12 C13 Switched and Monitored DPI PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 46M4003 | 5897 | 1U 9 C19/3 C13 Switched and Monitored 60A 3 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 46M4005 | 5895 | 1U 12 C13 Switched and Monitored 60A 3 Phase PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 1U C13 Enterprise PDUs (12x IEC 320 C13 outlets) | | | | | | | | | | | | | | | |
| 39M2816 | 6030 | DPI C13 PDU+ | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 39Y8941 | 6010 | Enterprise C13 PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 1U C19 Enterprise PDUs (6x IEC 320 C19 outlets) | | | | | | | | | | | | | | | |
| 39Y8948 | 6060 | Enterprise C19 PDU | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 39Y8923 | 6061 | Enterprise C19 3 phase PDU (60a) | N | N | Y | N | N | N | Y | N | N | N | Y | Y | N |
| 1U Front-end PDUs (3x IEC 320 C19 outlets) | | | | | | | | | | | | | | | |

| Part number | Feature code | Description | ANZ | ASEAN | Brazil | EET | MEA | RUCIS | WE | HTK | INDIA | JAPAN | LA | NA | PRC |
|---|--------------|---|-----|-------|--------|-----|-----|-------|----|-----|-------|-------|----|----|-----|
| 39Y8938 | 6002 | DPI 30amp/125V Front-end PDU with NEMA L5-30P | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 39Y8939 | 6003 | DPI 30amp/250V Front-end PDU with NEMA L6-30P | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 39Y8934 | 6005 | DPI 32amp/250V Front-end PDU with IEC 309 2P+Gnd | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 39Y8940 | 6004 | DPI 60amp/250V Front-end PDU with IEC 309 2P+Gnd connector | Y | N | Y | Y | Y | Y | Y | N | N | Y | Y | Y | N |
| 39Y8935 | 6006 | DPI 63amp/250V Front-end PDU with IEC 309 2P+Gnd connector | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 1U NEMA PDUs (6x NEMA 5-15R outlets) | | | | | | | | | | | | | | | |
| 39Y8905 | 5900 | DPI 100-127v PDU with Fixed Nema L5-15P line cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| Line cords for 1U PDUs that ship without a line cord | | | | | | | | | | | | | | | |
| 40K9611 | 6504 | 4.3m, 32A/380-415V, EPDU/IEC 309 3P+N+G 3ph wye (non-US) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 40K9612 | 6502 | 4.3m, 32A/230V, EPDU to IEC 309 P+N+G (non-US) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 40K9613 | 6503 | 4.3m, 63A/230V, EPDU to IEC 309 P+N+G (non-US) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 40K9614 | 6500 | 4.3m, 30A/208V, EPDU to NEMA L6-30P (US) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 40K9615 | 6501 | 4.3m, 60A/208V, EPDU to IEC 309 2P+G (US) Line Cord | N | N | Y | N | N | N | Y | N | N | Y | Y | Y | N |
| 40K9617 | 6505 | 4.3m, 32A/230V, Souriau UTG to AS/NZS 3112 (Aus/NZ) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |
| 40K9618 | 6506 | 4.3m, 32A/250V, Souriau UTG Female to KSC 8305 (S. Korea) Line Cord | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y | Y |

For more information, see the Lenovo Press documents in the PDU category:

<https://lenovopress.com/servers/options/pdu>

Rack cabinets

The following table lists the supported rack cabinets.

Table 33. Rack cabinets

| Model | Description |
|------------|--|
| 7D6DA007WW | ThinkSystem 42U Onyx Primary Heavy Duty Rack Cabinet (1200mm) |
| 7D6DA008WW | ThinkSystem 42U Pearl Primary Heavy Duty Rack Cabinet (1200mm) |
| 7D6EA009WW | ThinkSystem 48U Onyx Primary Heavy Duty Rack Cabinet (1200mm) |
| 7D6EA00AWW | ThinkSystem 48U Pearl Primary Heavy Duty Rack Cabinet (1200mm) |
| 1410O42 | Lenovo EveryScale 42U Onyx Heavy Duty Rack Cabinet |
| 1410P42 | Lenovo EveryScale 42U Pearl Heavy Duty Rack Cabinet |
| 1410O48 | Lenovo EveryScale 48U Onyx Heavy Duty Rack Cabinet |
| 1410P48 | Lenovo EveryScale 48U Pearl Heavy Duty Rack Cabinet |

For specifications about these racks, see the Lenovo Rack Cabinet Reference, available from:
<https://lenovopress.com/lp1287-lenovo-rack-cabinet-reference>

For more information, see the list of Product Guides in the Rack cabinets category:
<https://lenovopress.com/servers/options/racks>

KVM console options

The following table lists the supported KVM consoles.

Table 34. KVM console

| Part number | Description |
|-------------|---|
| Consoles | |
| 4XF7A84188 | ThinkSystem 18.5" LCD console (with US English keyboard) |
| 4XF7A73009 | ThinkSystem 18.5" LCD console (with US English keyboard) |
| 17238BX | 1U 18.5" Standard Console (without keyboard - see the next table) |

The following table lists the keyboards supported with the 1U 18.5" Standard Console (now withdrawn).

Note: These keyboards are not supported with the ThinkSystem 18.5" LCD Console.

Table 35. Keyboards for 1U 18.5" Standard Console

| Part number | Description |
|-------------|--|
| 7ZB7A05469 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Arabic 253 RoHS v2 |
| 7ZB7A05468 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Belg/UK 120 RoHS v2 |
| 7ZB7A05206 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Czech 489 RoHS v2 |
| 7ZB7A05207 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Danish 159 RoHS v2 |
| 7ZB7A05208 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Dutch 143 RoHS v2 |
| 7ZB7A05210 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Fr/Canada 445 RoHS v2 |
| 7ZB7A05209 | ThinkSystem Keyboard w/ Int. Pointing Device USB - French 189 RoHS v2 |
| 7ZB7A05211 | ThinkSystem Keyboard w/ Int. Pointing Device USB - German 129 RoHS v2 |
| 7ZB7A05212 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Greek 219 RoHS v2 |
| 7ZB7A05213 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Hebrew 212 RoHS v2 |
| 7ZB7A05214 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Hungarian 208 RoHS v2 |
| 7ZB7A05215 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Italian 141 RoHS v2 |
| 7ZB7A05216 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Japanese 194 RoHS v2 |
| 7ZB7A05217 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Korean 413 RoHS v2 |
| 7ZB7A05218 | ThinkSystem Keyboard w/ Int. Pointing Device USB - LA Span 171 RoHS v2 |
| 7ZB7A05219 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Norwegian 155 RoHS v2 |
| 7ZB7A05220 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Polish 214 RoHS v2 |
| 7ZB7A05221 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Portugese 163 RoHS v2 |
| 7ZB7A05222 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Russian 441 RoHS v2 |
| 7ZB7A05223 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Slovak 245 RoHS v2 |
| 7ZB7A05231 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Slovenian 234 RoHS v2 |
| 7ZB7A05224 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Spanish 172 RoHS v2 |
| 7ZB7A05225 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Swed/Finn 153 RoHS v2 |
| 7ZB7A05226 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Swiss F/G 150 RoHS v2 |
| 7ZB7A05227 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Thai 191 RoHS v2 |
| 7ZB7A05467 | ThinkSystem Keyboard with Int. Pointing Device USB - Trad Chinese/US 467 RoHS v2 |

| Part number | Description |
|-------------|---|
| 7ZB7A05228 | ThinkSystem Keyboard w/ Int. Pointing Device USB - Turkish 179 RoHS v2 |
| 7ZB7A05229 | ThinkSystem Keyboard w/ Int. Pointing Device USB - UK Eng 166 RoHS v2 |
| 7ZB7A05470 | ThinkSystem Keyboard w/ Int. Pointing Device USB - US Eng 103P RoHS v2 |
| 7ZB7A05230 | ThinkSystem Keyboard w/ Int. Pointing Device USB - US Euro 103P RoHS v2 |

The following table lists the available KVM switches and the options that are supported with them.

Table 36. KVM switches and options

| Part number | Description |
|--|---|
| KVM Console switches | |
| 1754D1T | ThinkSystem Digital 2x1x16 KVM Switch (DVI video output port) |
| 1754A1T | ThinkSystem Analog 1x8 KVM Switch (DVI video output port) |
| 1754D2X | Global 4x2x32 Console Manager (GCM32) |
| 1754D1X | Global 2x2x16 Console Manager (GCM16) |
| 1754A2X | Local 2x16 Console Manager (LCM16) |
| 1754A1X | Local 1x8 Console Manager (LCM8) |
| Cables for ThinkSystem Digital and Analog KVM Console switches | |
| 4X97A11108 | ThinkSystem VGA to DVI Conversion Cable |
| 4X97A11109 | ThinkSystem Single-USB Conversion Cable for Digital KVM |
| 4X97A11107 | ThinkSystem Dual-USB Conversion Cable for Digital KVM |
| 4X97A11106 | ThinkSystem USB Conversion Cable for Analog KVM |
| Cables for GCM and LCM Console switches | |
| 43V6147 | Single Cable USB Conversion Option (UCO) |
| 39M2895 | USB Conversion Option Pack |
| 46M5383 | Virtual Media Conversion Option Gen2 (VCO2) |
| 46M5382 | Serial Conversion Option (SCO) |

For more information, see the list of Product Guides in the KVM Switches and Consoles category:
<http://lenovopress.com/servers/options/kvm>

Lenovo Financial Services

Why wait to obtain the technology you need now? No payments for 90 days and predictable, low monthly payments make it easy to budget for your Lenovo solution.

- **Flexible**

Our in-depth knowledge of the products, services and various market segments allows us to offer greater flexibility in structures, documentation and end of lease options.

- **100% Solution Financing**

Financing your entire solution including hardware, software, and services, ensures more predictability in your project planning with fixed, manageable payments and low monthly payments.

- **Device as a Service (DaaS)**

Leverage latest technology to advance your business. Customized solutions aligned to your needs. Flexibility to add equipment to support growth. Protect your technology with Lenovo's Premier Support service.

- **24/7 Asset management**

Manage your financed solutions with electronic access to your lease documents, payment histories, invoices and asset information.

- **Fair Market Value (FMV) and \$1 Purchase Option Leases**

Maximize your purchasing power with our lowest cost option. An FMV lease offers lower monthly payments than loans or lease-to-own financing. Think of an FMV lease as a rental. You have the flexibility at the end of the lease term to return the equipment, continue leasing it, or purchase it for the fair market value. In a \$1 Out Purchase Option lease, you own the equipment. It is a good option when you are confident you will use the equipment for an extended period beyond the finance term. Both lease types have merits depending on your needs. We can help you determine which option will best meet your technological and budgetary goals.

Ask your Lenovo Financial Services representative about this promotion and how to submit a credit application. For the majority of credit applicants, we have enough information to deliver an instant decision and send a notification within minutes.

Related publications and links

For more information, see these resources:

- Lenovo ThinkSystem SR670 product page:
<https://www.lenovo.com/us/en/data-center/servers/racks/Thinksystem-SR670/p/77XX7SRSR67>
- 3D Interactive Tour of the SR670:
<https://lenovopress.com/lp0944-3d-tour-thinksystem-sr670>
- Lenovo ThinkSystem SR670 product publications:
<https://pubs.lenovo.com/sr670/>
 - Quick Start
 - Rack Installation Guide
 - Setup Guide
 - Hardware Maintenance Manual
 - Messages and Codes Reference
- ServerProven hardware compatibility:
<http://www.lenovo.com/us/en/serverproven>

Related product families

Product families related to this document are the following:

- [2-Socket Rack Servers](#)
- [High Performance Computing](#)
- [ThinkSystem SR670 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2026. All rights reserved.

This document, LP0923, was created or updated on February 2, 2021.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP0923>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP0923>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®
ServerProven®
System x®
ThinkAgile®
ThinkSystem®
XClarity®

The following terms are trademarks of other companies:

AMD, Radeon Instinct™, and Radeon™ are trademarks of Advanced Micro Devices, Inc.

Intel®, the Intel logo and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, ActiveX®, Georgia®, Hyper-V®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.