


# IBM eServer xSeries Hot-Swap SCSI Disk Drive Comparison

## Positioning Information (withdrawn product)

### Main

There are three 3.5" hot-swap drive trays used with drives currently available for the xSeries family, as shown in Figure 1.

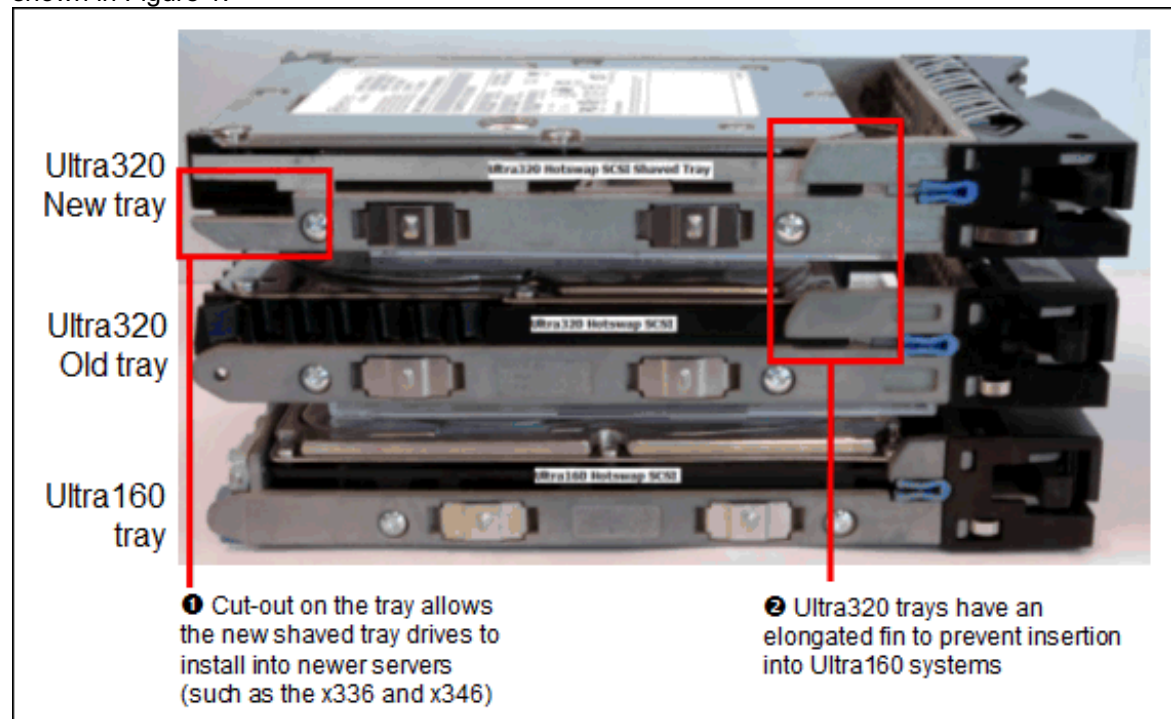

**Figure 1:** The differences between the three 3.5" hot-swap SCSI drive trays

These three 3.5" trays are shown top to bottom in Figure 1:


- A new "shaved" tray that supports Ultra320 SCSI drives. This tray is designed to prevent being inserted in systems that only support Ultra160 drives. These are the only drives that fit into the x336 and x346.
- An older Ultra320 tray. This tray is also designed to prevent being inserted into systems that only support Ultra160 drives. These fit into any xSeries servers with Ultra320 bays except the x336 and x346.
- A tray that supports Ultra160 drives. These fit into any xSeries servers with Ultra160 or Ultra320 bays except the x336 and x346. If installed in an Ultra320 system, the SCSI bus slows down to 160 MBps.

The differences, as shown in Figure 1, are as follows:

⊕ Near the connectors, the new Ultra320 "shaved" tray has a cutout on the rail. This cutout is to prevent the older Ultra320 tray and the Ultra160 tray from being inserted into servers that only support the new tray design (such as the x336 and x346).


? Near the front of the drive, the Ultra320 drives have an elongated stub that prevents them from being inserted into the older Ultra160 bays. This is more of a support and testing statement than a technology statement because Ultra320 drives are technically able to run at Ultra160 speeds.

The new Ultra320 "shaved" tray is also slightly shorter in height than the older Ultra320 tray, as shown in Figure 2. This tray is designed to fit into the newer servers when the drive bays are shorter. The reason for the new design is so that three hot swap drives can be installed in a stack in a 2U server chassis. The older Ultra320 trays are too tall by a few millimeters to achieve this.

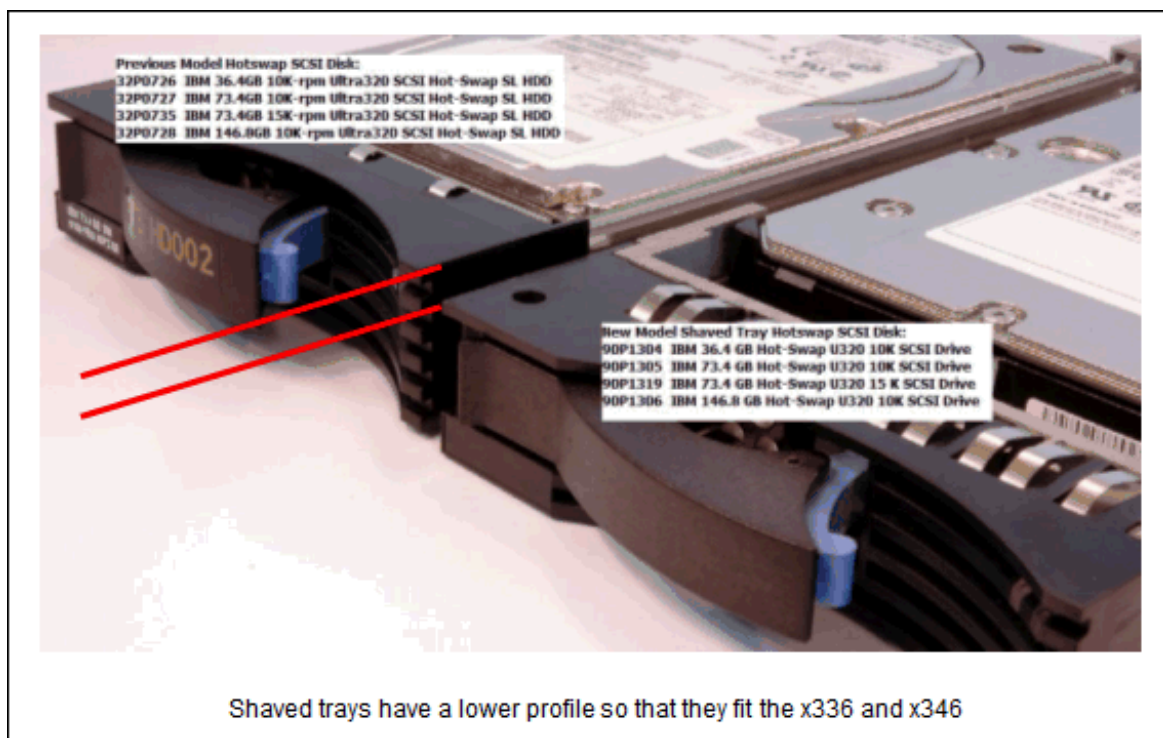

**Figure 2:** Comparing the heights of the two Ultra320 drives

The fourth type of tray is the new 2.5" small form factor (SFF) drive tray. Figure 3 compares the size of the 2.5" and 3.5" drive trays. This smaller size means that the drives occupy a much smaller space in the server, so either more can be housed internally or the size of the server chassis can be smaller.

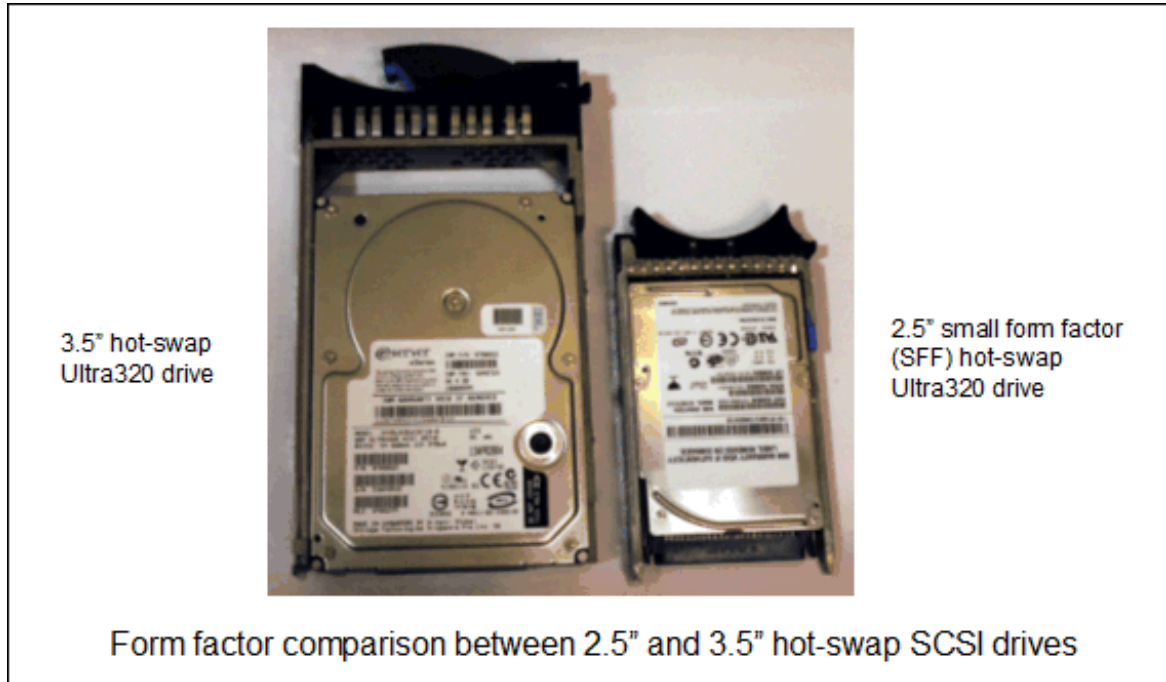

**Figure 3:** Comparing the 2.5" and 3.5" drive trays

**Server matrix**

The following table shows where each of the tray types can be used. Note that only a subset of drives available with each particular tray type are normally supported in each server. Consult ServerProven for details: <http://www.pc.ibm.com/us/compat/xseries/storage/hsmatrix.html>

**Table legend:**

**Fits:** The tray will physically fit into the server. However, the specific drive may not be supported by that server. Check ServerProven at <http://www.pc.ibm.com/us/compat/xseries/storage/hsmatrix.html>

**Does not fit:** The tray will not physically fit into the hot-swap drive bay of this server.

	<b>SCSI controller</b>	<b>3.5" Ultra160 tray</b>	<b>Old 3.5" Ultra320 tray</b>	<b>New 3.5" Ultra320 tray</b>	<b>2.5" Ultra320 tray</b>
<b>x206</b> (some models)	Ultra320	Fits	Fits	Fits	Does not fit
<b>x225</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x226</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x235</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x236</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x255</b>	Ultra160 with Ultra320 backplane	Fits	Fits	Fits	Does not fit
<b>x335</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x336</b> (new tray only)	Ultra320	Does not fit	Does not fit	Fits (some models)	Fits (some models)
<b>x345</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x346</b> (new tray only)	Ultra320	Does not fit	Does not fit	Fits	Does not fit
<b>x360</b> (Ultra160 only)	Ultra160	Fits	Does not fit	Does not fit	Does not fit
<b>x365</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x366</b> (SAS drives only)	SAS	Does not fit	Does not fit	Does not fit	Does not fit
<b>x440</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x445</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x450</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x455</b>	Ultra320	Fits	Fits	Fits	Does not fit
<b>x460</b> (SAS drives only)	SAS	Does not fit	Does not fit	Does not fit	Does not fit
<b>EXP300</b> (Ultra160 only)	Ultra160 backplane	Fits	Does not fit	Does not fit	Does not fit
<b>EXP400</b>	Ultra320 backplane	Fits	Fits	Fits	Does not fit
<b>DS300</b>	Ultra320 backplane	Fits	Fits	Fits	Does not fit
<b>DS400</b>	Ultra320 backplane	Fits	Fits	Fits	Does not fit

## Related product families

Product families related to this document are the following:

- [Drives](#)

## Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.  
8001 Development Drive  
Morrisville, NC 27560  
U.S.A.  
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, TIPS0569, was created or updated on June 10, 2005.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:  
<https://lenovopress.lenovo.com/TIPS0569>
- Send your comments in an e-mail to:  
[comments@lenovopress.com](mailto:comments@lenovopress.com)

This document is available online at <https://lenovopress.lenovo.com/TIPS0569>.

## Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ServerProven®

xSeries®

Other company, product, or service names may be trademarks or service marks of others.