

# Emulex 10Gb Virtual Fabric Adapter for IBM System x (Withdrawn)

## Product Guide (withdrawn product)

The Emulex 10Gb Virtual Fabric Adapter for IBM System x is a member of IBM's comprehensive networking portfolio of 1 Gb and 10 Gb Ethernet adapters and delivers industry-leading performance and scalability per watt, reducing requirements for power and cooling. Protocol offloads enable the efficient use of computing resources and the support of more virtual machines per CPU, and reduce the number of servers required to support data center demands. Furthermore, the capability to use fiber-optic or twin-ax copper cabling allows you to deploy the fabric of your choice.



Figure 1. Emulex 10Gb Virtual Fabric Adapter for IBM System x (with optional SFP+ transceivers installed)

## **Did you know?**

The Emulex 10Gb Virtual Fabric Adapter for IBM System x is based on the Emulex OneConnect Universal Converged Network Adapter (UCNA) platform and will include support for Fibre Channel over Ethernet (FCoE) as a future feature entitlement upgrade.

By using a common infrastructure for Ethernet and SANs, you can reduce capital expense for adapters, switches, and cables; and operational expense for power, cooling, and IT administration.

## Part number information

Table 1. Ordering part number and feature code

Description	Part number	Feature code
Emulex 10Gb Virtual Fabric Adapter for IBM System x	49Y4250	5749

Note: This adapter is referred to in the product documentation as the Emulex OneConnect OCe10102 multi-protocol PCI Express Converged Network Adapter.

The part number includes the following items:

- One Emulex 10Gb Virtual Fabric Adapter with a 3U bracket attached
- 2U bracket
- Quick Install Guide
- Documentation CD
- Important Notices flyer

## Supported transceivers and direct-attach cables

The adapter has two empty SFP+ cages that support either SFP+ SR transceivers or twin-ax direct-attached copper cables as listed in Table 2 and Table 3 respectively.

Table 2. Supported transceivers

Description	Part number
Optical Transceivers	
Brocade 10Gb SFP+ SR Optical Transceiver	49Y4216
QLogic 10Gb SFP+ SR Optical Transceiver	49Y4218
IBM/Brocade 10Gb SFP+ SR Optical Transceiver	44W2411
IBM/BNT 10Gb SFP+ SR Optical Transceiver	46C3447
Cisco SFP-10G-SR*	SFP-10G-SR
Avago AFBR-703SDZ-ELX*	AFBR-703SDZ-ELX
Finisar FTLX8571D3BCL-EM*	FTLX8571D3BCL-EM

\* These SFP+ SR transceivers are non-IBM parts that have been validated by Emulex for use with this adapter

Table 3. Supported direct-attach cables

Description	Part number
Active DAC/Twinax cables	
IBM Twinax Direct Attach Copper (DAC) Cable 1m	45W2398 (8-pack: 45W2401)
IBM Twinax Direct Attach Copper (DAC) Cable 3m	45W2408 (8-pack: 45W2409)
IBM Twinax Direct Attach Copper (DAC) Cable 5m	45W3039 (8-pack: 45W3042)
Active DAC Cable, 1 m Act 10 Gb Ethernet	46K6182
Active DAC Cable, 3 m Act 10 Gb Ethernet	46K6183
Active DAC Cable, 5 m Act 10 Gb Ethernet	46K6184
Passive DAC/Twinax cables	
IBM 1M Passive DAC-SFP+ Cable	90Y9427
IBM 3M Passive DAC-SFP+ Cable	90Y9430
IBM 5M Passive DAC-SFP+ Cable	90Y9433
0.5m Molex Direct Attach Copper SFP+ Cable	59Y1932
1m Molex Direct Attach Copper SFP+ Cable	59Y1936
1 Meter Passive Twin-Ax Assembly*	Cisco: SFP-H10GB-CU1M Molex: 74752-2101 Tyco: 1979753-2
3 Meter Passive Twin-Ax Assembly*	Cisco: SFP-H10GB-CU3M Molex: 74752-2301
5 Meter Passive Twin-Ax Assembly*	Cisco: SFP-H10GB-CU5M Molex: 74752-2501 Tyco: 1979143-6

\* These DAC cables are non-IBM parts that have been validated by Emulex for use with this adapter

**Note:** The IBM 8.5M Passive DAC-SFP+ Cable (90Y9436) is not supported.

## Features

The Emulex 10Gb Virtual Fabric Adapter has the following features:

- Dual-channel, 10 Gbps Ethernet controller
- Near line-rate 10 Gbps performance
- 2 SFP+ empty cages to support either SFP+ SR or twin-ax copper connections
  - SFP+ SR link is with SFP+ SR optical module with LC connectors
  - SFP+ twin-ax copper link is with SFP+ direct attached copper module/cable
- TCIP/IP stateless offloads
- TCP chimney offload
- Based on Emulex OneConnect technology and includes FCoE support as a future feature entitlement upgrade
- Hardware parity, CRC, ECC, and other advanced error checking
- PCI Express 2.0 x8 host interface
- Low-profile form-factor design
- IPv4/IPv6 TCP, UDP checksum offload
- VLAN insertion and extraction
- Support for jumbo frames up to 9000 bytes
- Preboot eXecutive Environment (PXE) 2.0 network boot support
- Interrupt coalescing
- Load balancing and failover support
- Deploy and manage this and other Emulex OneConnect-based adapters with OneCommand Manager

## Standards supported

The following IEEE standards are supported:

- IEEE 802.3ae (10Gb/s Ethernet XAUI)
- IEEE 802.1q (VLAN)
- IEEE 802.1Qbb (Priority flow control)
- IEEE 802.1Qaz (ETS and Congestion Management)
- IEEE 802.1p (QoS/CoS)
- IEEE 802.3ad (Link Aggregation)
- IEEE 802.3x (Flow Control)

## Physical specifications

The adapter has the following physical specifications:

Height: 167 mm (6.60 in)

Width: 69 mm (2.71 in)

Depth: 17.3 mm (0.69 in)

## Operating environment

This adapter is supported in the following environment:

- Temperature:
  - Operating: 0° to 55° C (32° to 131° F)
  - Non-operating: -40° to 70° C (-40° to 158° F)
- Humidity: 5 to 95%, non-condensing

## Warranty

One-year limited warranty. When installed in a System x server, these cards assume your system's base warranty and any IBM ServicePac upgrade.

## Supported servers

The Emulex 10Gb Virtual Fabric Adapter for IBM System x is supported in the IBM System x and iDataPlex servers listed in Table 4.

Table 4. Supported System x servers (Part 1)

	x3100 M3	x3200 M2	x3200 M3	x3250 M2	x3250 M3	x3350	x3400	x3400 M2	x3400 M3	x3455	x3500	x3500 M2	x3500 M3	x3550	x3550 M2
Emulex 10Gb Virtual Fabric Adapter	N	Y	Y	Y	Y	Y	N	Y	Y	Y	N	Y	Y	Y	Y

Table 4. Supported System x servers (Part 2)

	x3550 M3	x3620 M3	x3630 M3	x3650	x3650 T	x3650 M2	x3650 M3	x3655	x3690 X5	x3755	x3755 M3	x3850 M2	x3950 M2	x3850 X5
Emulex 10Gb Virtual Fabric Adapter	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	Y	Y	Y

See IBM ServerProven for the latest information on the System x servers that support this adapter:  
<http://ibm.com/servers/eserver/serverproven/compat/us/>

## Popular configurations

This section illustrates how the Emulex 10Gb Virtual Fabric Adapter can be used in configurations.

Figure 2 shows Emulex 10Gb Virtual Fabric Adapters installed in a supported rack server. The servers are connected to a 10Gb Ethernet network using a pair of 10Gb Ethernet switches.

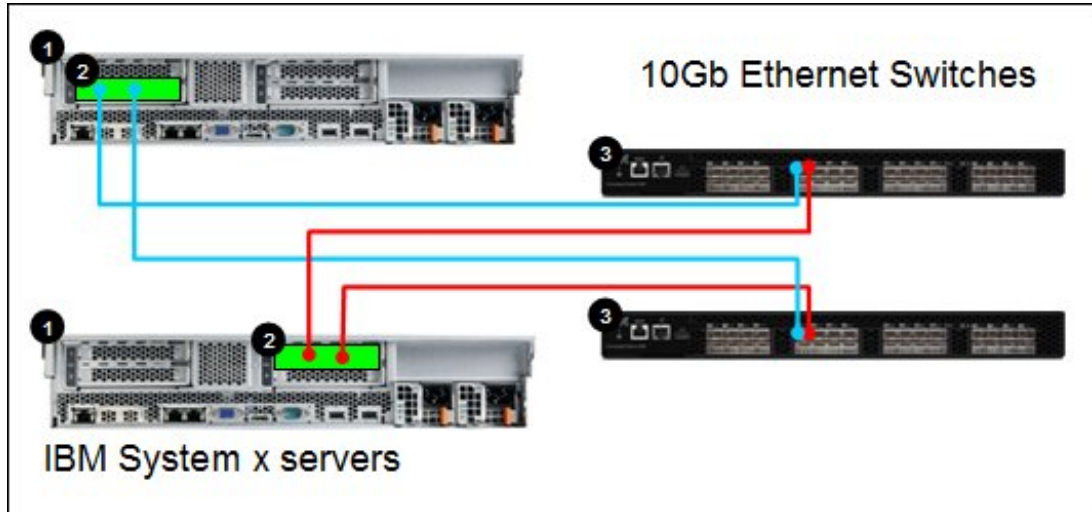


Figure 2. Popular configuration

The parts used are listed in Table 5.

Table 5. Components used with the Emulex 10Gb Virtual Fabric Adapter (Figure 2)

Diagram reference	Part number/machine type	Description	Quantity
1	Varies	Supported server (See Table 4)	2
2	49Y4250	Emulex 10Gb Virtual Fabric Adapter	2
2	Varies	Supported 10Gb SFP+ Transceivers or direct-attach cables (See Table 2)	4
3	Varies	10Gb Ethernet Switch	2

Note: If SFP+ transceivers are used, this configuration also requires fiber optic cabling between the servers and the switches.



## Supported operating systems

The Emulex 10Gb Virtual Fabric Adapter for IBM System x supports the following operating systems:

- Microsoft Windows Server 2003, Web Edition
- Microsoft Windows Server 2003/2003 R2, Datacenter Edition
- Microsoft Windows Server 2003/2003 R2, Datacenter x64 Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise Edition
- Microsoft Windows Server 2003/2003 R2, Enterprise x64 Edition
- Microsoft Windows Server 2003/2003 R2, Standard Edition
- Microsoft Windows Server 2003/2003 R2, Standard x64 Edition
- Microsoft Windows Server 2008 R2
- Microsoft Windows Server 2008, Datacenter x64 Edition
- Microsoft Windows Server 2008, Datacenter x86 Edition
- Microsoft Windows Server 2008, Enterprise x64 Edition
- Microsoft Windows Server 2008, Enterprise x86 Edition
- Microsoft Windows Server 2008, Standard x64 Edition
- Microsoft Windows Server 2008, Standard x86 Edition
- Microsoft Windows Server 2008, Web x64 Edition
- Microsoft Windows Server 2008, Web x86 Edition
- Microsoft Windows Small Business Server 2003/2003 R2 Premium Edition
- Microsoft Windows Small Business Server 2003/2003 R2 Standard Edition
- Red Hat Enterprise Linux 5 Server Edition
- Red Hat Enterprise Linux 5 Server with Xen x64 Edition
- Red Hat Enterprise Linux 5 Server x64 Edition
- Red Hat Enterprise Linux 6 Server x64 Edition
- SUSE LINUX Enterprise Server 10 for AMD64/EM64T
- SUSE LINUX Enterprise Server 10 for x86
- SUSE LINUX Enterprise Server 10 with Xen for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 for x86
- SUSE LINUX Enterprise Server 11 with Xen for AMD64/EM64T
- VMware ESX 4.0
- VMware ESX 4.1
- VMware ESXi 4.1

See IBM ServerProven at <http://ibm.com/servers/eserver/serverproven/compat/us/> for the latest information about the specific versions and service packs supported. Not all servers support all operating systems and versions.

## Related publications

For more information refer to these documents:

- 10Gb CNAs for IBM System x product page  
<http://ibm.com/systems/x/options/storage/cna>
- IBM US Announcement Letter  
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS>
- IBM System x Configuration and Options Guide  
<http://ibm.com/support/entry/portal/docdisplay?Indocid=SCOD-3ZVQ5W>

## Related product families

Product families related to this document are the following:

- [Ethernet Adapters](#)

## Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.  
8001 Development Drive  
Morrisville, NC 27560  
U.S.A.  
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, TIPS0762, was created or updated on January 11, 2013.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:  
<https://lenovopress.lenovo.com/TIPS0762>
- Send your comments in an e-mail to:  
[comments@lenovopress.com](mailto:comments@lenovopress.com)

This document is available online at <https://lenovopress.lenovo.com/TIPS0762>.

## Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

BNT®

ServerProven®

System x®

iDataPlex®

The following terms are trademarks of other companies:

Linux® is the trademark of Linus Torvalds in the U.S. and other countries.

Microsoft®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.