

ThinkAgile HX650 V3 2U Integrated System and Certified Node

Product Guide

The Lenovo ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes are 2-socket 2U systems that feature the 5th Generation Intel Xeon Scalable processors (formerly code named "Emerald Rapids) and 4th Generation Intel Xeon Scalable processors (formerly code named "Sapphire Rapids). ThinkAgile HX650 V3 models are designed for deploying industry-leading hyperconvergence software from Nutanix on Lenovo enterprise platforms. Nutanix brings the benefits of web-scale technologies to enterprise applications through enterprise storage, data protection, infrastructure resilience, management and analytics, and security.

The 2U systems are available either as an Integrated System or Certified Nodes:

- HX650 V3 Storage Integrated Systems and Certified Nodes for storage-heavy workloads
- HX650 V3 Integrated Systems and Certified Nodes for high performance workloads.
- HX650 V3 Integrated Systems and Certified Nodes for SAP HANA

HX Integrated Systems deliver fully validated and integrated Lenovo hardware and firmware, certified and preloaded with licensed Nutanix software. They also include ThinkAgile Premier support with one single point of contact for support of the hardware and software.

HX Certified Nodes deliver fully validated Lenovo hardware and firmware, certified and can be preloaded with Nutanix software. Certified Nodes do not include licenses to Nutanix software and enhanced software support.

The ThinkAgile HX Integrated Systems and Certified Nodes for SAP HANA are certified by SAP for deploying SAP HANA solutions on hyperconverged infrastructure (HCI) in production environments.



Figure 1. Lenovo ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes with 2.5-inch drive bays

Did you know?

The ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes are built on the Lenovo ThinkSystem SR650 V3 server that features enterprise-class reliability, management, and security.

The HX650 V3 Integrated Systems offer ThinkAgile Premier Single Point of Support for quick 24/7 problem reporting and resolution.

Key features

Combining performance and flexibility, the HX650 V3 are a great choice for enterprises of all sizes. The systems offer a broad selection of processors, memory and drives, and offers high performance features that industries such as finance, healthcare and telco need. Outstanding reliability, availability, and serviceability (RAS) and high-efficiency design can improve your business environment and can help save operational costs.

Integrated System features

The HX Integrated Systems Series, HX650 V3 IS, HX650 V3 Storage IS and HX650 v3 IS for SAP HANA offer the following key features:

- Factory-integrated, pre-configured ready-to-go integrated systems built on proven and reliable Lenovo ThinkSystem servers that provide compute power for a variety of workloads and applications and powered by industry's most feature-rich hyperconverged infrastructure software from Nutanix.
- Provide quick and convenient path to implement a hyperconverged solution powered by Nutanix with "one stop shop" and a single point of contact provided by Lenovo for purchasing, deploying, and supporting the solution.
- Meet various workload demands with cost-efficient hybrid or performance-optimized all-flash storage (including all-NVMe) configurations.
- Deliver fully validated and integrated hardware and firmware that is certified with Nutanix software.
- Include Lenovo ThinkAgile Premier Single Point of Support for quick 24/7 problem reporting and resolution.
- Offer Lenovo deployment services to get customers up and running quickly.

Certified Node features

The HX Certified Nodes Series, HX650 V3 CN, HX650 V3 Storage CN and HX650 v3 CN for SAP HANA offer the following key features:

- Built on proven and reliable Lenovo ThinkSystem servers that provide compute power for a variety of workloads and applications.
- Deliver fully validated and integrated hardware and firmware that is certified with Nutanix software.
- Preloaded with Nutanix software and ready for out-of-box deployment (Note: software licenses are not included).
- Provide flexibility in using the existing Nutanix term-based software licenses and active support contracts or purchasing new software licenses and support contracts from Nutanix.
- Offer optional Lenovo Professional Services to get customers up and running quickly

The Nutanix software running on the HX650 V3 delivers the following key features:

- Mission-critical performance and ultra-reliability of Lenovo's platforms married with the dramatic efficiency and cost savings of the industry-leading Nutanix Enterprise Cloud OS .
- Certified to run SAP HANA in production on Lenovo hyperconverged infrastructure.
- A natively integrated solution for data protection and continuous availability at VM granularity that gives administrators an affordable range of options to meet the recovery point objectives (RPO) and recovery time objectives (RTO) for different applications.
- A fault resistant platform, with no single point of failure and no bottlenecks with shared-nothing architecture, where all data, metadata and services are distributed to all nodes within the cluster, that is built to detect, isolate and recover from failures anywhere in the system.
- An intuitive user-centric management experience to simplify every aspect of the IT infrastructure lifecycle and provide a single pane of glass to monitor and control Nutanix clusters, with simplified

workflows and rich automation for common administrative tasks.

- Powerful security features, such as two-factor authentication and data-at-rest encryption, with a security development lifecycle that is integrated into product development to help customers meet the most stringent security requirements.

Hardware features

The HX systems are based on the SR650 V3 and have the following hardware features:

Scalability and performance

The HX650 V3 offer numerous features to boost performance, improve scalability and reduce costs:

- Supports one or two Intel Xeon Processor Scalable processors
 - Fifth Generation
 - Up to 64 cores and 128 threads
 - Core speeds of up to 3.9 GHz
 - TDP ratings of up to 350 W
 - Fourth Generation
 - Up to 60 cores and 120 threads
 - Core speeds of up to 3.7 GHz
 - TDP ratings of up to 350 W
- Support for DDR5 memory DIMMs to maximize the performance of the memory subsystem:
 - Up to 32 DDR5 memory DIMMs, 16 DIMMs per processor
 - 8 memory channels per processor (2 DIMMs per channel)
 - Supports 1 DIMM per channel operating at 5600 MHz (5th Gen processors) or 4800 MHz (4th Gen processors)
 - Supports 2 DIMMs per channel operating at 4800 MHz (5th Gen processors) or 4400 MHz (4th Gen processors)
 - Using 256GB 3DS RDIMMs, the server supports up to 8TB of system memory
- Supports up to 8 single-width GPUs or 3 double-wide GPUs, for substantial processing power in a 2U system.
- Supports up to 40x 2.5-inch hot-swap drive bays, by using combinations of front-accessible (up to 24 bays), mid bays (8 bays) and rear-accessible (8 bays).
- Configurations with 3.5-inch drives support up to 12x 3.5-inch hot-swap front-accessible drives plus 4x 3.5-inch hot-swap rear-accessible drives and 4 x 3.5-inch hot swap mid bays.
- Supports 8x NVMe drives without oversubscription of PCIe lanes (1:1 connectivity) . The use of NVMe drives maximizes drive I/O performance, in terms of throughput and latency.
- Supports 12x SATA drives using the onboard SATA controller (no additional adapter needed), enabling lower cost, high capacity storage solution for cold or archival storage workloads.
- Available M.2 RAID Boot Adapters support RAID-1 which can enable two NVMe M.2 drives to be configured as a redundant pair. SATA is only supported for non-RAID boot
- The server has a dedicated industry-standard OCP 3.0 small form factor (SFF) slot, with a PCIe 4.0 x16 interface, supporting a variety of Ethernet network adapters. A simple-swap mechanism with a thumbscrew and pull-tab enables tool-less installation and removal of the adapter. The adapter supports shared BMC network sideband connectivity to enable out-of-band systems management.
- The server offers PCI Express 5.0 I/O expansion capabilities that doubles the theoretical maximum bandwidth of PCIe 4.0 (32GT/s in each direction for PCIe Gen 5, compared to 16 GT/s with PCIe Gen 4 and 8 GT/s with PCIe Gen 3). A PCIe 5.0 x16 slot provides 128 GB/s bandwidth, enough to support a dual-port 200GbE network connection.
- The server offers up to eight PCIe 5.0 slots, all with rear access, plus a slot dedicated to the OCP adapter.

Availability and serviceability

The HX650 V3 provide many features to simplify serviceability and increase system uptime:

- The server offers Single Device Data Correction (SDDC, also known as Chipkill), Adaptive Double-Device Data Correction (ADDDC, also known as Redundant Bit Steering or RBS), and memory mirroring for redundancy in the event of a non-correctable memory failure. Note: ADDDC is not supported with 9x4 RDIMMs.
- Available M.2 RAID Boot Adapters support RAID-1 which can enable two NVMe M.2 drives to be configured as a redundant pair. SATA is only supported for non-RAID boot
- The server has up to two hot-swap redundant power supplies and up to six hot-swap redundant fans to provide availability for business-critical applications.
- The light path diagnostics feature uses LEDs to lead the technician to failed (or failing) components, which simplifies servicing, speeds up problem resolution, and helps improve system availability.
- Supports a new dedicated Firmware and Root of Trust Security Module that stores all system firmware settings, making it easier to transfer customer settings in the event of a system board replacement, while still maintaining data security
- Solid-state drives (SSDs) offer more reliability and performance than traditional mechanical HDDs for greater uptime.
- Proactive Platform Alerts (including PFA and SMART alerts): Processors, voltage regulators, memory, internal storage (SAS/SATA HDDs and SSDs, NVMe SSDs, M.2 storage, flash storage adapters), fans, power supplies, server ambient and subcomponent temperatures. Alerts can be surfaced through the XClarity Controller to managers such as Lenovo XClarity Administrator, VMware vCenter, and Microsoft System Center. These proactive alerts let you take appropriate actions in advance of possible failure, thereby increasing server uptime and application availability.
- The built-in XClarity Controller 2 continuously monitors system parameters, triggers alerts, and performs recovery actions in case of failures to minimize downtime.
- Built-in diagnostics in UEFI, using Lenovo XClarity Provisioning Manager, speed up troubleshooting tasks to reduce service time.
- Lenovo XClarity Provisioning Manager supports diagnostics and can save service data to a USB key drive or remote CIFS share folder for troubleshooting and reduce service time.
- Auto restart in the event of a momentary loss of AC power (based on power policy setting in the XClarity Controller service processor)
- Offers a diagnostics port on the front of the server to allow you to attach an external diagnostics handset for enhanced systems management capabilities.
- Support for the XClarity Administrator Mobile app running on a supported smartphone or tablet and connected to the server through the service-enabled USB port, enables additional local systems management functions.
- Three-year or one-year customer-replaceable unit and onsite limited warranty (varies by geography), 9 x 5 next business day. Optional service upgrades are available.

Manageability and security

Systems management features simplify local and remote management of the HX650 V3:

- The server includes XClarity Controller 2 (XCC2) to monitor server availability. Included upgrade to XCC2 Platinum to provide remote control (keyboard video mouse) functions, support for the mounting of remote media files (ISO and IMG image files), boot capture, power capping and new XCC2 Platinum features. New XCC2 Platinum features include System Guard, new security modes including a CNSA-compliant mode, FIPS 140-3 and NIST 800-193 support, and a new Neighbor Group feature.
- Lenovo XClarity Administrator offers comprehensive hardware management tools that help to

increase uptime, reduce costs and improve productivity through advanced server management capabilities.

- UEFI-based Lenovo XClarity Provisioning Manager, accessible from F1 during boot, provides system inventory information, graphical UEFI Setup, platform update function, operating system installation function, and diagnostic functions.
- Support for Lenovo XClarity Energy Manager, which captures real-time power and temperature data from the server and provides automated controls to lower energy costs.
- An integrated industry-standard Unified Extensible Firmware Interface (UEFI) enables improved setup, configuration, and updates, and simplifies error handling.
- Support for industry standard management protocols, IPMI 2.0, SNMP 3.0, Redfish REST API, serial console via IPMI
- An integrated hardware Trusted Platform Module (TPM) supporting TPM 2.0 enables advanced cryptographic functionality, such as digital signatures and remote attestation.
- Administrator and power-on passwords help protect from unauthorized access to the server.
- Supports Secure Boot to ensure only a digitally signed operating system can be used. Supported with HDDs and SSDs, and M.2 drives.
- Industry-standard Advanced Encryption Standard (AES) NI support for faster, stronger encryption.
- Intel Execute Disable Bit functionality can prevent certain classes of malicious buffer overflow attacks when combined with a supported operating system.
- Intel Trusted Execution Technology provides enhanced security through hardware-based resistance to malicious software attacks, allowing an application to run in its own isolated space, protected from all other software running on a system.
- Additional physical security features are an available chassis intrusion switch and available lockable front bezel.

Energy efficiency

The HX650 V3 offer the following energy-efficiency features to save energy, reduce operational costs, and increase energy availability:

- Energy-efficient system board components help lower operational costs.
- Carbon offset is available at click of button. You can project the carbon emissions per device for an average lifecycle (up to 5 years). That information is available [here](#)
- High-efficiency power supplies with 80 PLUS Platinum and Titanium certifications
- Solid-state drives (SSDs) consume as much as 80% less power than traditional spinning 2.5-inch HDDs.
- The server uses hexagonal ventilation holes, which can be grouped more densely than round holes, providing more efficient airflow through the system and thus keeping your system cooler.
- Optional Lenovo XClarity Energy Manager provides advanced data center power notification, analysis, and policy-based management to help achieve lower heat output and reduced cooling needs.

Components and connectors

The ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes are based on the ThinkSystem SR650 V3 server.

The following figure shows the front of the HX650 V3 with 2.5-inch drives.

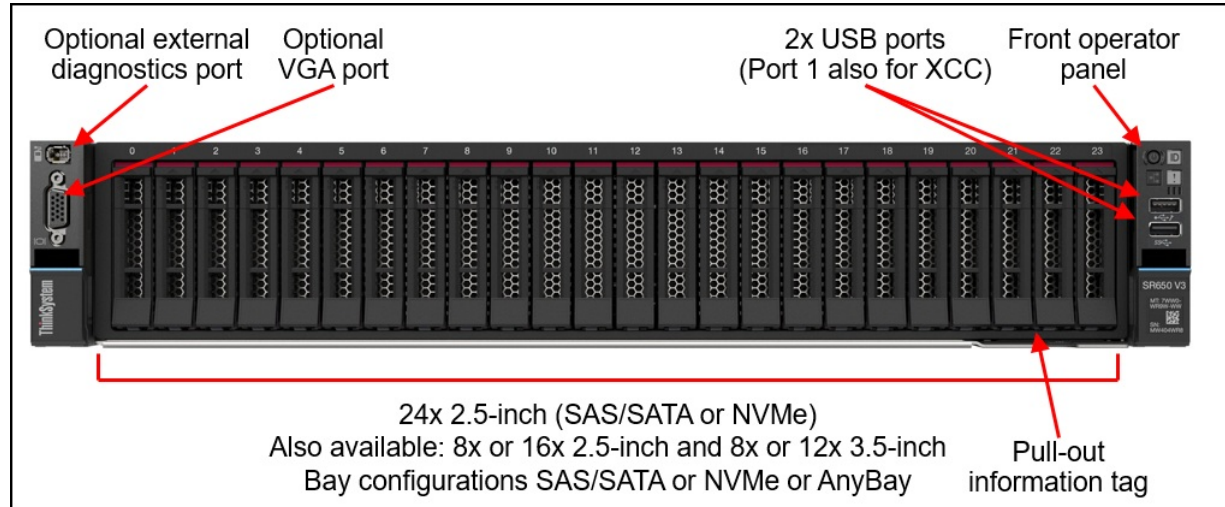


Figure 2. Front view with 2.5-inch drives

The following figure shows the front of the HX650 V3 with 3.5-inch drives.

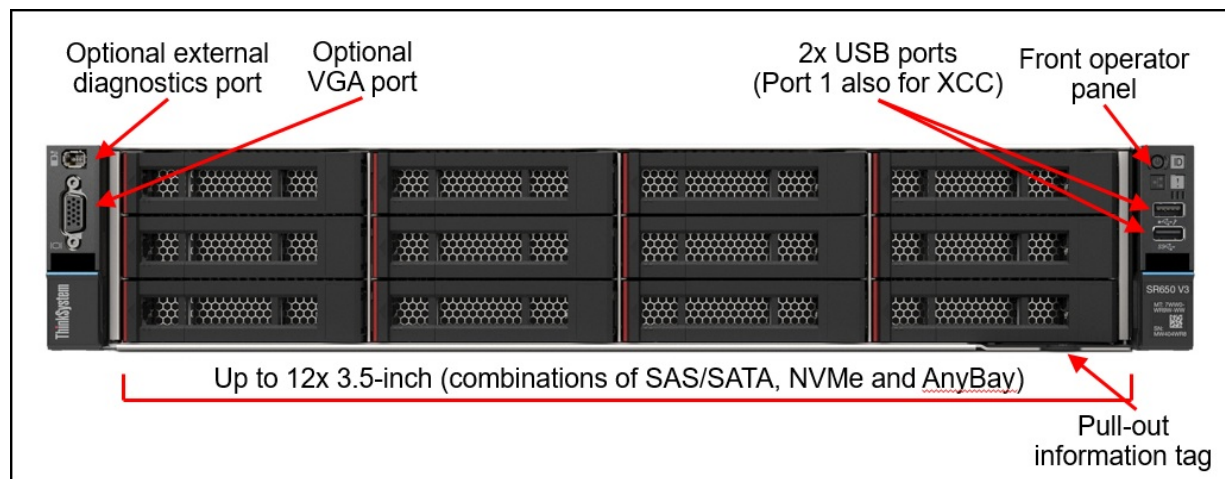


Figure 3. Front view with 3.5-inch drives

The following figure shows the components visible from the rear of the system. The figure shows one configuration, with eight PCIe slots, however there are additional rear configurations which include 3.5-inch drive bays, 2.5-inch drive bays.

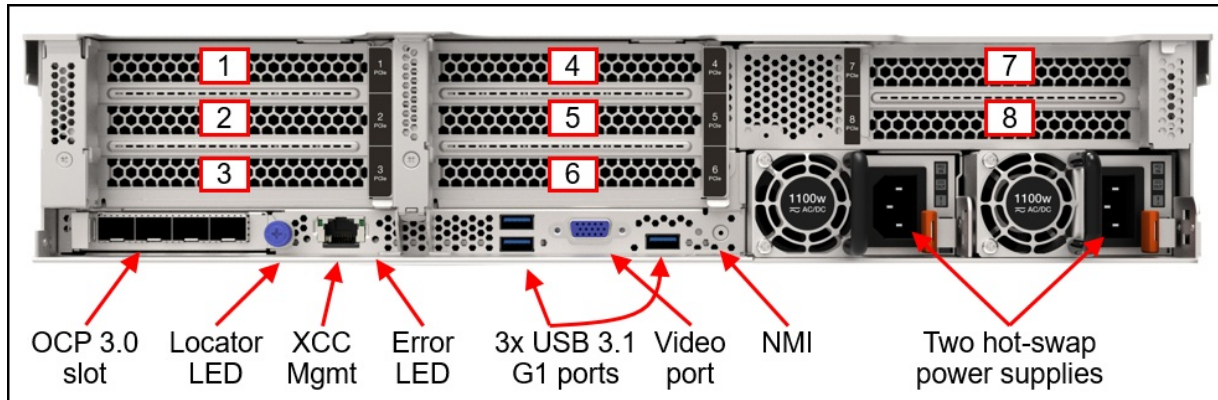


Figure 4. Rear view of the HX systems (configuration with eight PCIe slots)

The following figure shows the locations of key components inside the systems.

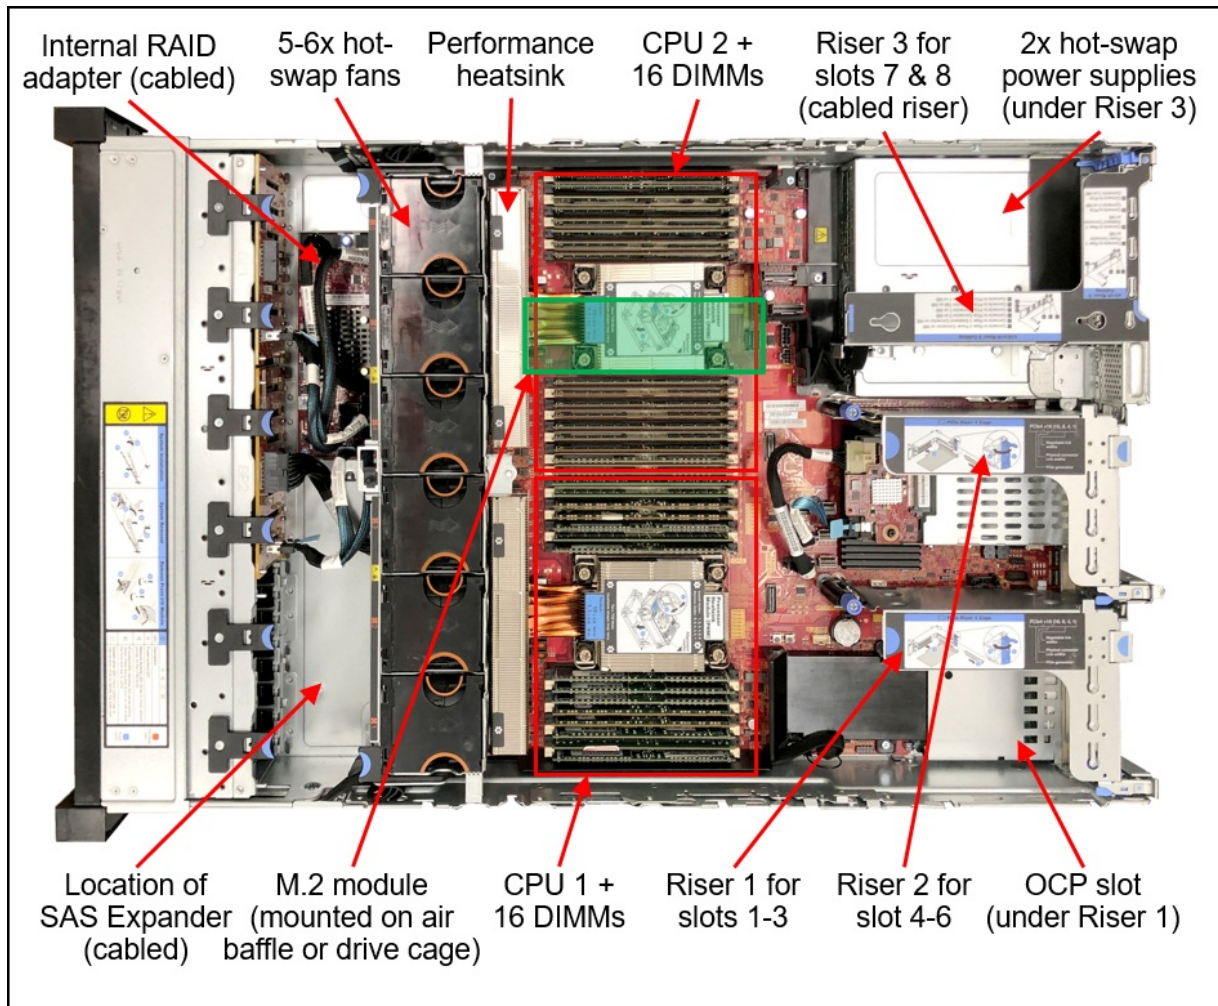


Figure 5. Internal view of the HX650 V3 systems

Standard specifications

The ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes are based on the ThinkSystem SR650 V3 server.

The following table provides an overview comparison between the HX systems.

Table 1. Comparison of features

	HX650 V3 Storage Integrated System HX650 V3 Storage Certified Node	HX650 V3 Integrated System HX650 V3 Certified Node	HX650 V3 IS for SAP HANA HX650 V3 CN for SAP HANA
HX offering type	Integrated System Certified Node	Integrated System Certified Node	Integrated System Certified Node
Target workloads	Storage heavy	High performance/Mission Critical	SAP HANA
Base MTM	IS: 7D6NCTO2WW CN: 7D6NCTO4WW	IS: 7D6NCTO1WW CN: 7D6NCTO3WW	IS: 7D6NCTO5WW CN: 7D6NCTO6WW
Form Factor	2U	2U	2U
Base platform	SR650 V3	SR650 V3	SR650 V3
Supported Cluster Sizes	3+ Nodes	3+ Nodes	3+ Nodes
CPU	1x or 2x Intel Xeon SP Gen 5 (Emerald Rapids) or Gen 4 (Sapphire Rapids)	2x Intel Xeon SP Gen 5 (Emerald Rapids) or Gen 4 (Sapphire Rapids)	2x Intel Xeon SP Gen 4 (Sapphire Rapids)
Memory	32x DDR5 5600 MHz (8TB maximum)	32x DDR5 5600 MHz (8TB maximum)	32x DDR5 5600 MHz (8TB maximum)
Drive Bays	Front: 12x 3.5" SAS/SATA Rear: 4x 2.5" SAS/SATA (Optional)	Front: 16x 2.5" SAS/SATA + optional 8x 2.5" AnyBay Rear: None	Front: 16x 2.5" SAS/SATA + optional 8x 2.5" AnyBay
Drive configurations	Hybrid	All Flash	All Flash
HBA	440-16i HBA	440-8i HBA 440-16i HBA	440-8i HBA 440-16i HBA
Boot drives	2x M.2	2x M.2	2x M.2
OCP networking	1x OCP 3.0 adapter 10Gb, 25Gb	1x OCP 3.0 adapter 10Gb, 25Gb	1x OCP 3.0 adapter 10Gb, 25Gb
PCIe networking	Up to 7x PCIe adapters 10Gb, 25Gb	Up to 7x PCIe adapters 10Gb, 25Gb, 100Gb	Up to 7x PCIe adapters 10Gb, 25Gb, 100Gb
GPUs	No GPU Support	3x Double Wide GPU 8x Single Wide GPU	No GPU Support
Hypervisor	Nutanix AHV, VMware ESXi	Nutanix AHV, VMware ESXi	Nutanix AHV, VMware ESXi

The following table lists the standard specifications.

Table 2. Standard specifications

Components	Specification
Machine types	7D6N - 2U Integrated Systems 7D6N - 2U Certified Node

Components	Specification
Form factor	2U rack
Processor	Supports one or two 5th generation Intel Xeon Scalable processor (formerly codenamed "Emerald Rapids") or 4th-generation Intel Xeon Scalable processor (formerly codenamed "Sapphire Rapids"). Supports up to 64 cores per 5th generation processor and up to 60 cores per 4th generation processor, core speeds of up to 3.9 GHz, and TDP ratings of up to 350 W.
Chipset	Intel C741 "Emmitsburg" chipset, part of the platform codenamed "Eagle Stream"
Memory	32 DIMM slots with two processors (16 DIMM slots per processor). Each processor has 8 memory channels, with 2 DIMMs per channel (DPC). Lenovo TruDDR5 RDIMMs, 9x4 RDIMMs, and 3DS RDIMMs are supported. DIMM slots are shared between standard system memory and persistent memory. DIMMs operate at up to 5600 MHz at 1 DPC and up to 4400 MHz at 2 DPC.
Persistent memory	Not supported.
Memory maximum	With RDIMMs: Up to 8TB by using 32x 256GB 3DS RDIMMs
Memory protection	ECC, SDDC (for x4-based memory DIMMs), ADDDC (for x4-based memory DIMMs excluding 9x4 RDIMMs, requires Platinum or Gold processors), and memory mirroring.
Disk drive bays	<ul style="list-style-type: none"> ● HX650 V3 Storage Integrated System and Certified Node: <ul style="list-style-type: none"> ○ Front drive bays: 12x 3.5-inch SAS/SATA ○ Rear drive bays: 4x 2.5-inch SAS/SATA ● HX650 V3 Integrated System and Certified Node: <ul style="list-style-type: none"> ○ Front drive bays (24 bays): 16x 2.5-inch SAS/SATA + 8x 2.5-inch AnyBay ○ Front drive bays (16 bays max): 16x 2.5-inch SAS/SATA ○ Rear drive bays: None ● HX650 V3 Integrated System and Certified Node for SAP HANA: <ul style="list-style-type: none"> ○ Front drive bays (24 bays): 16x 2.5-inch SAS/SATA + 8x 2.5-inch AnyBay ○ Rear drive bays: None ● Internal M.2 module supporting up to two M.2 drives, for OS boot support ● Note: EDSFF drive bays are currently not supported.
Storage controller	<ul style="list-style-type: none"> ● Onboard NVMe ports (RAID not supported) ● 12 Gb SAS/SATA HBA (non-RAID) <ul style="list-style-type: none"> ○ 8-port or 16-port ○ PCIe 5.0 or PCIe 4.0 host interface
Network interfaces	Dedicated OCP 3.0 SFF slot with PCIe 5.0 x16 host interface. Supports a variety of 2-port and 4-port adapters with 10GbE and 25GbE network connectivity. 1Gbe port for XClarity Controller 2 (XCC2) management.
PCIe slots	<p>Up to 8x PCIe 5.0 slots, all full height slots and with rear access, plus a slot dedicated to the OCP adapter. Slot availability is based on riser selection and rear drive bay selection. Slots 4, 5, and 6 (riser 2) require two processors.</p> <p>Slots are configured using three riser cards. Riser 1 (slots 1-3) and Riser 2 (slots 4-6) are installed in slots in the system board, Riser 3 (slots 7-8) is cabled to ports on the system board.</p> <p>A variety of riser cards are available. See the I/O expansion for details.</p> <p>For 2.5-inch front drive configurations, the server supports the installation of a RAID adapter or HBA in a dedicated area that does not consume any of the PCIe slots.</p>
GPU support	Supports up to 8x single-wide GPUs or up to 3x double-wide GPUs

Components	Specification
Ports	<p>Front: 1x USB 3.1 G1 (5 Gb/s) port, 1x USB 2.0 port (also for XCC local management), External diagnostics port, optional VGA port.</p> <p>Rear: 3x USB 3.1 G1 (5 Gb/s) ports, 1x VGA video port, 1x RJ-45 1GbE systems management port for XCC remote management. Optional DB-9 COM serial port (installs in slot 3).</p> <p>Internal: 1x USB 3.1 G1 connector for operating system or license key purposes</p>
Cooling	6x (with two processors installed) or 5x (with one processor installed) dual-rotor hot swap 60 mm fans, configuration dependent. Fans are N+1 redundant, tolerating a single-rotor failure. One fan integrated in each power supply.
Power supply	Up to two hot-swap redundant AC power supplies, 80 PLUS Platinum or 80 PLUS Titanium certification. 750 W, 1100 W, 1800 W, 2400 W and 2600W AC options, supporting 220 V AC. 750 W and 1100 W options also support 110V input supply. In China only, all power supply options support 240 V DC. Also available is a 1100W power supply with a -48V DC input.
Video	Embedded graphics with 16 MB memory with 2D hardware accelerator, integrated into the XClarity Controller 2 management controller. Maximum resolution is 1920x1200 32bpp at 60Hz.
Hot-swap parts	Drives, power supplies, and fans.
Systems management	Operator panel with status LEDs. Optional External Diagnostics Handset with LCD display. Models with 8x or 16x 2.5-inch front drive bays can optionally support an Integrated Diagnostics Panel. XClarity Controller 2 (XCC2) embedded management controller, XClarity Administrator centralized infrastructure delivery, XClarity Integrator plugins, and XClarity Energy Manager centralized server power management. Included upgrade to XClarity Controller Platinum to enable remote control and other functions.
Security features	Chassis intrusion switch, Power-on password, administrator's password, Root of Trust module supporting TPM 2.0 and Platform Firmware Resiliency (PFR). Optional lockable front security bezel.
Software	<ul style="list-style-type: none"> Integrated Systems: Nutanix 2.0 PnP: Starter, Pro, and Ultimate editions - Nutanix Cloud Platform, Nutanix Cloud Infrastructure, Nutanix Cloud Manager, NCI-Data Certified Nodes: Licenses purchased separately from Nutanix or a Nutanix reseller. Nutanix Acropolis Starter, Pro and Ultimate editions . OEM 2.0: Starter, Pro, and Ultimate editions - Nutanix Cloud Platform, Nutanix Cloud Infrastructure, Nutanix Cloud Manager, NCI-Data
Hypervisors	Nutanix AHV or VMware ESXi.
Hardware warranty	<ul style="list-style-type: none"> Integrated Systems: Three-, four-, or five-year customer-replaceable unit and onsite limited hardware warranty with ThinkAgile Premier Support and selectable service levels: 9x5 next business day (NBD) parts delivered, 9x5 NBD onsite response, 24x7 coverage with 2-hour or 4-hour onsite response, or 6-hour or 24-hour committed repair (select areas). Also available are YourDrive YourData, Premier Support, and Enterprise Software Support. Certified Nodes: Three, four, or five-year customer-replaceable unit and onsite limited warranty with selectable service levels: 9x5 coverage with next business day (NBD) parts delivered (base warranty), 9x5 coverage with NBD onsite response (Foundation Service), 24x7 coverage with 4-hour onsite response or 24-hour committed repair (select areas) (Essential Service), or 24x7 coverage with 2-hour onsite response or 6-hour committed repair (select areas) (Advanced Service). Also available are 1-year and 2-year post-warranty extensions, YourDrive YourData, and Enterprise Software Support.
Software maintenance	Three-, four-, or five-year software support and subscription (matches the duration of the selected warranty period).
Dimensions	Width: 445 mm (17.5 in.), height: 87 mm (3.4 in.), depth: 764 mm (30.1 in.)
Weight	Maximum: 38.8 kg (85.5 lb)

Models

Factory-integrated models of the integrated systems and certified nodes are configured by using the Lenovo Data Center Solution Configurator (DCSC), <http://dcsc.lenovo.com>

During the configuration process, you are selecting one of the base Configure-to-Order (CTO) models first, and then you are adding components (processors, memory, drives, and network adapters) to the selected model according to the output from the Nutanix Sizer tool, <http://services.nutanix.com/>

To ensure that the controlled GPUs and accelerators are only sold in the supported markets, the following configure-to-order base machine-type models (CTO MTMs) are selectable in DCSC:

- **Standard Open models** are available in all markets worldwide. Controlled GPUs cannot be configured using these models. These are CTO1WW models.
- **GPU Controlled models** are used to order any of the controlled GPUs and accelerators. Controlled models are not available in affected markets. If you start from a controlled model, your configuration must include a controlled GPUs.

Note:

- For all models listed in the GPU **Controlled models** column, one of the controlled GPUs *must* be selected in the DCSC configurator. DCSC will display an error if you configuration does not include one of the controlled GPUs.
- You are required to engage a Lenovo representative in the project that includes the ThinkAgile HX Series Integrated Systems. ThinkAgile HX Certified Nodes do not have this requirement.

The following table lists the base CTO models.

Table 3. CTO base models

Server model	Standard Open models	GPU Controlled models
	These CTO models are available in all markets. Configurations based on these MTMs cannot include controlled GPUs.	These CTO models are not available in affected markets. Configurations based on these MTMs must include controlled GPUs.
ThinkAgile HX650 V3 Integrated System	7D6NCTO1WW	7D6NCTOCWW
ThinkAgile HX650 V3 Storage Integrated System	7D6NCTO2WW	None
ThinkAgile HX650 V3 Certified Node	7D6NCTO3WW	7D6NCTODWW
ThinkAgile HX650 V3 Storage Certified Node	7D6NCTO4WW	None
ThinkAgile HX650 V3 Integrated System for SAP HANA	7D6NCTO5WW	None
ThinkAgile HX650 V3 Certified Node for SAP HANA	7D6NCTO6WW	None
ThinkAgile HX650 V3 LOD Integrated System - China Only	7D6NCTO7WW	None
ThinkAgile HX650 V3 Storage LOD Integrated System - China Only	7D6NCTO8WW	None
ThinkAgile HX650 V3 SAP HANA LOD Integrated System - China Only	7D6NCTO9WW	None

Comparison with the ThinkSystem SR650 V3

The ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes are based on the ThinkSystem SR650 V3 server, however there are key differences:

- No persistent memory support
- No onboard SATA controller support
- RAID adapter support for Boot only
- No VROC RAID support
- No EDSFF drive support
- No mid-chassis drive bay support
- Encryption not supported on SED drives
- Fibre Channel support for data migration only
- No InfiniBand support

For details about the ThinkSystem SR650 V3, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server>

To verify what specific hardware components are supported with the HX650 V3, see the DCSC configurator:

<https://dcsc.lenovo.com>

Processors

The HX650 V3 supports processors in either the 5th Gen Intel Xeon Scalable Processor family or the 4th Gen Intel Xeon Scalable Processor family.

Topics in this section:

- [5th Gen Intel Xeon Scalable processors](#)
- [4th Gen Intel Xeon Scalable processors](#)

5th Gen Intel Xeon Scalable processors

The HX650 V3 support the following processors.

For details about these options, including configuration rules, see the SR650 V3 product guide: <https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#processors>

Support for additional processors: The table below lists the processors supported across all configurations. Additional processors may also be supported. Please contact your Lenovo representative regarding the support of additional options through our Special Bid ordering process.

Configuration notes:

- HX650 V3 Integrated System and Certified Node supports 2 processors
- HX650 V3 Storage Integrated System and Certified Node support 1 or 2 processors
- HX650 V3 Integrated System and Certified Node for SAP HANA support will be coming in approximately 2Q calendar year
- The platform is available for early orderability only. Delivery and support for these systems will be available in 2H of calendar year 2024. For more details please reach out to your local Lenovo representative.

Table 4. Processor choices

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
None	BYW3	Intel Xeon Silver 4509Y 8C 125W 2.6GHz Processor	2	2	2	2	No	No
None	BYW4	Intel Xeon Silver 4510 12C 150W 2.4GHz Processor	2	2	2	2	No	No
None	BYVS	Intel Xeon Silver 4510T 12C 115W 2.0GHz Processor	2	2	2	2	No	No
None	BYVP	Intel Xeon Silver 4514Y 16C 150W 2.0GHz Processor	2	2	2	2	No	No
None	BYW6	Intel Xeon Silver 4516Y+ 24C 185W 2.2GHz Processor	2	2	2	2	No	No
None	BYVU	Intel Xeon Gold 5512U 28C 185W 2.1GHz Processor	No	1	No	1	No	No
None	BYVW	Intel Xeon Gold 5515+ 8C 165W 3.2GHz Processor	2	2	2	2	No	No
None	BYW7	Intel Xeon Gold 5520+ 28C 205W 2.2GHz Processor	2	2	2	2	No	No
None	BYVX	Intel Xeon Gold 6526Y 16C 195W 2.8GHz Processor	2	2	2	2	No	No
None	BYWK	Intel Xeon Gold 6530 32C 270W 2.1GHz Processor	2	2	2	2	No	No

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
None	BYW0	Intel Xeon Gold 6534 8C 195W 3.9GHz Processor	2	2	2	2	No	No
None	BYVQ	Intel Xeon Gold 6538N 32C 205W 2.1GHz Processor	No	1	No	1	No	No
None	BYW8	Intel Xeon Gold 6538Y+ 32C 225W 2.2GHz Processor	2	2	2	2	No	No
None	BYVY	Intel Xeon Gold 6542Y 24C 250W 2.9GHz Processor	2	2	2	2	No	No
None	BYW1	Intel Xeon Gold 6544Y 16C 270W 3.6GHz Processor	2	2	2	2	No	No
None	BYVR	Intel Xeon Gold 6548N 32C 250W 2.8GHz Processor	No	1	No	1	No	No
None	BYVZ	Intel Xeon Gold 6548Y+ 32C 250W 2.5GHz Processor	2	2	2	2	No	No
None	BYW9	Intel Xeon Gold 6554S 36C 270W 2.2GHz Processor	2	2	2	2	No	No
None	BYW5	Intel Xeon Platinum 8558 48C 330W 2.1GHz Processor	2	2	2	2	No	No
None	BYWA	Intel Xeon Platinum 8558P 48C 350W 2.7GHz Processor	2	2	2	2	No	No
None	BYWE	Intel Xeon Platinum 8558U 48C 300W 2.0GHz Processor	No	1	No	1	No	No
None	BYW2	Intel Xeon Platinum 8562Y+ 32C 300W 2.8GHz Processor	2	2	2	2	No	No
None	BYWF	Intel Xeon Platinum 8568Y+ 48C 350W 2.3GHz Processor	2	2	2	2	No	No
None	BYWG	Intel Xeon Platinum 8570 56C 350W 2.1GHz Processor	2	2	2	2	No	No
None	BYWD	Intel Xeon Platinum 8571N 52C 300W 2.4GHz Processor	No	1	No	1	No	No
None	BYWH	Intel Xeon Platinum 8580 60C 350W 2.0GHz Processor	2	2	2	2	No	No
None	BYWC	Intel Xeon Platinum 8581V 60C 270W 2.0GHz Processor	No	1	No	1	No	No
None	BYWJ	Intel Xeon Platinum 8592+ 64C 350W 1.9GHz Processor	2	2	2	2	No	No
None	BYWB	Intel Xeon Platinum 8592V 64C 330W 2.0GHz Processor	No	1	No	1	No	No

4th Gen Intel Xeon Scalable processors

The HX650 V3 support the following processors.

For details about these options, including configuration rules, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#processors>

Support for additional processors: The table below lists the processors supported across all configurations. Additional processors may also be supported. Please contact your Lenovo representative regarding the support of additional options through our Special Bid ordering process.

Configuration notes:

- HX650 V3 Integrated System and Certified Node supports 2 processors
- HX650 V3 Storage Integrated System and Certified Node support 1 or 2 processors
- HX650 V3 Integrated System and Certified Node for SAP HANA supports 2 processors

Table 5. Processor choices

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
None	BQ64	Intel Xeon Silver 4410T 10C 150W 2.7GHz Processor	2	2	2	2	2	2
None	BQ67	Intel Xeon Silver 4410Y 12C 150W 2.0GHz Processor	2	2	2	2	2	2
None	BQ69	Intel Xeon Silver 4416+ 20C 165W 2.0GHz Processor	2	2	2	2	2	2
None	BQ6J	Intel Xeon Gold 5411N 24C 165W 1.9GHz Processor	No	1	No	1	No	No
None	BQ63	Intel Xeon Gold 5415+ 8C 150W 2.9GHz Processor	2	2	2	2	2	2
None	BQ6L	Intel Xeon Gold 5416S 16C 150W 2.0GHz Processor	2	2	2	2	2	2
None	BQ6H	Intel Xeon Gold 5418N 24C 165W 1.8GHz Processor	2	2	2	2	2	2
None	BQ66	Intel Xeon Gold 5418Y 24C 185W 2.0GHz Processor	2	2	2	2	2	2
None	BQ65	Intel Xeon Gold 5420+ 28C 205W 2.0GHz Processor	2	2	2	2	2	2
None	BPPD	Intel Xeon Gold 6414U 32C 250W 2.0GHz Processor	No	1	No	1	No	No
None	BQ6C	Intel Xeon Gold 6416H 18C 165W 2.2GHz Processor	2	2	2	2	2	2
None	BQ6B	Intel Xeon Gold 6418H 24C 185W 2.1GHz Processor	2	2	2	2	2	2
None	BQ6G	Intel Xeon Gold 6421N 32C 185W 1.8GHz Processor	No	1	No	1	No	No
None	BPQF	Intel Xeon Gold 6426Y 16C 185W 2.5GHz Processor	2	2	2	2	2	2
None	BQ6F	Intel Xeon Gold 6428N 32C 185W 1.8GHz Processor	2	2	2	2	2	2
None	BPPC	Intel Xeon Gold 6430 32C 270W 2.1GHz Processor	2	2	2	2	2	2
None	BPQC	Intel Xeon Gold 6434 8C 195W 3.7GHz Processor	2	2	2	2	2	2
None	BQ6E	Intel Xeon Gold 6434H 8C 195W 3.7GHz Processor	2	2	2	2	2	2
None	BQ6K	Intel Xeon Gold 6438M 32C 205W 2.2GHz Processor	2	2	2	2	2	2
None	BQ6D	Intel Xeon Gold 6438N 32C 205W 2.0GHz Processor	2	2	2	2	2	2
None	BQ62	Intel Xeon Gold 6438Y+ 32C 205W 2.0GHz Processor	2	2	2	2	2	2
None	BPQE	Intel Xeon Gold 6442Y 24C 225W 2.6GHz Processor	2	2	2	2	2	2
None	BPQB	Intel Xeon Gold 6444Y 16C 270W 3.6GHz Processor	2	2	2	2	2	2
None	BQ6A	Intel Xeon Gold 6448H 32C 250W 2.4GHz Processor	2	2	2	2	2	2
None	BPQD	Intel Xeon Gold 6448Y 32C 225W 2.1GHz Processor	2	2	2	2	2	2
None	BPPM	Intel Xeon Gold 6454S 32C 270W 2.2GHz Processor	2	2	2	2	2	2
None	BPPH	Intel Xeon Platinum 8444H 16C 270W 2.9GHz Processor	2	2	2	2	2	2
None	BPPG	Intel Xeon Platinum 8450H 28C 250W 2.0GHz Processor	2	2	2	2	2	2
None	BPPB	Intel Xeon Platinum 8452Y 36C 300W 2.0GHz Processor	2	2	2	2	2	2
None	BPPF	Intel Xeon Platinum 8454H 32C 270W 2.1GHz Processor	2	2	2	2	2	2
None	BPPT	Intel Xeon Platinum 8458P 44C 350W 2.7GHz Processor	2	2	2	2	2	2
None	BPPN	Intel Xeon Platinum 8460H 40C 330W 2.2GHz Processor	2	2	2	2	2	2

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
None	BPPQ	Intel Xeon Platinum 8460Y+ 40C 300W 2.0GHz Processor	2	2	2	2	2	2
None	BPPK	Intel Xeon Platinum 8461V 48C 300W 2.2GHz Processor	No	1	No	1	No	No
None	BPQA	Intel Xeon Platinum 8462Y+ 32C 300W 2.8GHz Processor	2	2	2	2	2	2
None	BPPU	Intel Xeon Platinum 8468 48C 350W 2.1GHz Processor	2	2	2	2	2	2
None	BPPE	Intel Xeon Platinum 8468H 48C 330W 2.1GHz Processor	2	2	2	2	2	2
None	BPPP	Intel Xeon Platinum 8468V 48C 330W 2.4GHz Processor	2	2	2	2	2	2
None	BN0N	Intel Xeon Platinum 8470 52C 350W 2.0GHz Processor	2	2	2	2	2	2
None	BPPJ	Intel Xeon Platinum 8470N 52C 300W 1.7GHz Processor	2	2	2	2	2	2
None	BPPR	Intel Xeon Platinum 8471N 52C 300W 1.8GHz Processor	No	1	No	1	No	No
None	BN0M	Intel Xeon Platinum 8480+ 56C 350W 2.0GHz Processor	2	2	2	2	2	2
None	BPPS	Intel Xeon Platinum 8490H 60C 350W 1.9GHz Processor	2	2	2	2	2	2

Memory

5th Generation Memory options

The HX650 V3 support the following memory options.

For details about these options, including configuration rules, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#memory-options>

Table 6. Memory options

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
RDIMMs - 5600 MHz								
4X77A88049	BWHW	ThinkSystem 32GB TruDDR5 5600MHz (1Rx4) 10x4 RDIMM	32	32	32	32	No	No
4X77A88052	BWHS	ThinkSystem 64GB TruDDR5 5600MHz (2Rx4) 10x4 RDIMM	32	32	32	32	No	No
4X77A88639	BX8Y	ThinkSystem 48GB TruDDR5 5600MHz (1Rx4) 10x4 RDIMM	32	32	32	32	No	No
4X77A88058	BWHV	ThinkSystem 96GB TruDDR5 5600MHz (2Rx4) RDIMM	32	32	32	32	No	No
4X77A88087	BWJE	ThinkSystem 16GB TruDDR5 5600MHz (1Rx8) RDIMM	32	32	32	32	No	No
4X77A88051	BWJC	ThinkSystem 32GB TruDDR5 5600MHz (2Rx8) RDIMM	32	32	32	32	No	No
4X77A88056	BWSL	ThinkSystem 24GB TruDDR5 5600MHz (1Rx8) RDIMM	32	32	32	32	No	No
4X77A88057	BWJD	ThinkSystem 48GB TruDDR5 5600MHz (2Rx8) RDIMM	32	32	32	32	No	No
3DS RDIMMs - 5600 MHz								
4X77A88054	BWHU	ThinkSystem 128GB TruDDR5 5600MHz (4Rx4) 3DS RDIMM	32	32	32	32	No	No

4th Generation Memory options

The HX650 V3 support the following memory options.

For details about these options, including configuration rules, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#memory-options>

Table 7. Memory options

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
RDIMMs								
4X77A77033	BKTN	ThinkSystem 64GB TruDDR5 4800MHz (2Rx4) 9x4 RDIMM	32	32	32	32	32	32
4X77A77029	BKTL	ThinkSystem 16GB TruDDR5 4800MHz (1Rx8) RDIMM	32	32	32	32	32	32
4X77A77031	BKTM	ThinkSystem 32GB TruDDR5 4800MHz (2Rx8) RDIMM	32	32	32	32	32	32
4X77A77032	BNF9	ThinkSystem 64GB TruDDR5 4800MHz (2Rx4) 10x4 RDIMM	32	32	32	32	32	32
4X77A77030	BNF6	ThinkSystem 32GB TruDDR5 4800MHz (1Rx4) 10x4 RDIMM	32	32	32	32	32	32
3DS RDIMMs								
4X77A77034	BNFC	ThinkSystem 128GB TruDDR5 4800MHz (4Rx4) 3DS RDIMM v2	32	32	32	32	32	32
4X77A77035	BNF8	ThinkSystem 256GB TruDDR5 4800MHz (8Rx4) 3DS RDIMM v2	32	32	32	32	32	32

Internal storage

Internal storage configurations of the HX650 V3 are as follows. All drives are hot-swap and are accessible from the front or rear of the system:

- HX650 V3 Integrated System and Certified Node:
 - Front: 16x 2.5" SAS/SATA + optional 8x 2.5" AnyBay
 - Rear: None
- HX650 V3 Storage Integrated System and Certified Node:
 - Front: 12x 3.5" SAS/SATA
 - Rear: 4x 2.5" SAS/SATA (Optional)
- HX650 V3 Integrated System and Certified Node for SAP HANA:
 - Front: 16x 2.5" SAS/SATA + optional 8x 2.5" AnyBay
 - Rear: None

The systems also support the following boot drive alternatives:

- M.2 drives in an M.2 adapter that is internal to the server

Note: Mid-chassis drives are not supported in HX650 V3.

Configuration rules

Configuration rules are as follows:

- Nutanix does not use the concept of "cache" drives but rather uses tiers. There are three tiers

currently supported

- o NVMe
- o SAS/SATA SSD
- o HDD tier - requires the SAS/SATA SSD
- o Currently, HX doesn't support mixed NVMe+HDD.
- HX Systems can be configured as:
 - o NVMe only
 - o NVMe+SAS/SATA SSD
 - o SAS/SATA SSD only
 - o SAS/SATA SSD+HDD
- All drives in a tier must be of the same capacity.
- For All Flash configurations, the system supports from 4 to 14 SSDs in increments of 2 drives
- All SSDs in the system must be of the same model and capacity. All HDDs in the system must be of the same type and capacity
- If using NVMe for boot, 2 drives are required and are used in RAID 1. When using SATA for boot only a single drive is required.
- Currently the max number of 2.5-inch drive slots is 16 when configuring a solution and will increase to 24 in the 4th quarter of this calendar year.

Backplanes

The choice of backplanes supported varies by system, as listed in the following table.

For details about these options, including configuration rules, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#internal-storage>

Table 8. Drive backplanes

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
Front 3.5-inch drive backplanes								
None	B8LT	ThinkSystem 2U 12x3.5" SAS/SATA Backplane	No	1	No	1	No	No
Front 2.5-inch drive backplanes								
None	B8LU	ThinkSystem 2U 8x2.5" SAS/SATA Backplane	3	No	3	No	3	3
None	BH8B	ThinkSystem 2U/4U 8x2.5" AnyBay Backplane	1	No	1	No	1	1
None	BH8D	ThinkSystem 2U/4U 8x2.5" NVMe Backplane	2	No	2	No	2	2
Rear 2.5-inch drive backplanes								
None	B8LV	ThinkSystem 2U 4x2.5" SAS/SATA Backplane	No	1	No	1	No	No

Boot drive enablement

For OS boot functions, the systems also supports two M.2 drives installed on an adapter internal to the server. The following table lists the supported controllers/enablement kits for M.2 boot drives.

For details about these options, including configuration rules, see the SR650 V3 product guide: <https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#internal-storage>

Table 9. Boot drive enablement

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
4Y37A79663	BM8X	ThinkSystem M.2 SATA/x4 NVMe 2-Bay Adapter	1	1	1	1	1	1
4Y37A09750	B8P9	ThinkSystem M.2 NVMe 2-Bay RAID Adapter	1	1	1	1	1	1

Controllers for internal storage

The HX650 V3 support the following internal storage controllers.

For details about these options, see the SR650 V3 product guide: <https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#controllers-for-internal-storage>

Table 10. Controllers for internal storage

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
4Y37A78601	BM51	ThinkSystem 440-8i SAS/SATA PCIe Gen4 12Gb HBA	No	No	No	No	3	3
4Y37A78602	BM50	ThinkSystem 440-16i SAS/SATA PCIe Gen4 12Gb HBA	No	1	No	1	No	No
4Y37A09725	B8P1	ThinkSystem 440-16i SAS/SATA PCIe Gen4 12Gb Internal HBA	1	No	1	No	1	1

Internal drive options

The following table lists the supported drive options for the HX650 V3.

Configuration Note: Currently the max number of 2.5-inch drive slots is 16 when configuring a solution and will increase to 24 in the 4th quarter of this calendar year.

Table 11. Internal drive options

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
2.5-inch hot-swap 24Gb SAS SSDs								
4XB7A80320	BNWF	ThinkSystem 2.5" PM1653 3.84TB Read Intensive SAS 24Gb HS SSD	24	4	24	4	24	24
4XB7A80321	BP3E	ThinkSystem 2.5" PM1653 7.68TB Read Intensive SAS 24Gb HS SSD	24	4	24	4	24	24
4XB7A80340	BNW8	ThinkSystem 2.5" PM1655 800GB Mixed Use SAS 24Gb HS SSD	24	4	24	4	24	24
4XB7A80341	BNW9	ThinkSystem 2.5" PM1655 1.6TB Mixed Use SAS 24Gb HS SSD	24	4	24	4	24	24
2.5-inch hot-swap 6 Gb SATA SSDs								
4XB7A72441	BM88	ThinkSystem 2.5" PM893 3.84TB Read Intensive SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A87526	BWKL	ThinkSystem 2.5" PM893a 1.92TB Read Intensive SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A87527	BWKK	ThinkSystem 2.5" PM893a 3.84TB Read Intensive SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A17103	BA7J	ThinkSystem 2.5" S4520 1.92TB Read Intensive SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A17104	BK77	ThinkSystem 2.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A17126	BA4T	ThinkSystem 2.5" S4620 960GB Mixed Use SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A17127	BA4U	ThinkSystem 2.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD	24	4	24	4	24	24
4XB7A17128	BK7L	ThinkSystem 2.5" S4620 3.84TB Mixed Use SATA 6Gb HS SSD	24	4	24	4	24	24
2.5-inch hot-swap PCIe 4.0 NVMe SSDs								
4XB7A13941	BMGD	ThinkSystem 2.5" U.2 P5520 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13942	BMGE	ThinkSystem 2.5" U.2 P5520 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13943	BNEF	ThinkSystem 2.5" U.2 P5520 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13631	BNEQ	ThinkSystem 2.5" U.2 P5520 15.36TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
4XB7A17129	BNEG	ThinkSystem 2.5" U.2 P5620 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A17130	BNEH	ThinkSystem 2.5" U.2 P5620 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A17133	BNEZ	ThinkSystem 2.5" U.2 P5620 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A79647	BNF2	ThinkSystem 2.5" U.3 7450 PRO 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A79648	BNF5	ThinkSystem 2.5" U.3 7450 PRO 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A79649	BNF4	ThinkSystem 2.5" U.3 7450 PRO 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A83097	BQAV	ThinkSystem 2.5" U.3 7450 PRO 15.36TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13967	BNEJ	ThinkSystem 2.5" U.3 7450 MAX 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13970	BNEY	ThinkSystem 2.5" U.3 7450 MAX 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
4XB7A13971	BNEL	ThinkSystem 2.5" U.3 7450 MAX 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	16	No	16	No	16	16
3.5-inch hot-swap 12 Gb SAS HDDs								
7XB7A00046	AUUG	ThinkSystem 3.5" 10TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	12	No	12	No	No
7XB7A00067	B117	ThinkSystem 3.5" 12TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	12	No	12	No	No
4XB7A80353	BPKU	ThinkSystem 3.5" 20TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	12	No	12	No	No
3.5-inch hot-swap 6 Gb SATA HDDs								
7XB7A00051	AUU8	ThinkSystem 3.5" 4TB 7.2K SATA 6Gb Hot Swap 512n HDD	No	12	No	12	No	No
7XB7A00052	AUUA	ThinkSystem 3.5" 6TB 7.2K SATA 6Gb Hot Swap 512e HDD	No	12	No	12	No	No
7XB7A00053	AUU9	ThinkSystem 3.5" 8TB 7.2K SATA 6Gb Hot Swap 512e HDD	No	12	No	12	No	No
7XB7A00054	AUUB	ThinkSystem 3.5" 10TB 7.2K SATA 6Gb Hot Swap 512e HDD	No	12	No	12	No	No
7XB7A00068	B118	ThinkSystem 3.5" 12TB 7.2K SATA 6Gb Hot Swap 512e HDD	No	12	No	12	No	No

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
4XB7A13914	B7F0	ThinkSystem 3.5" 16TB 7.2K SATA 6Gb Hot Swap 512e HDD	No	12	No	12	No	No
3.5-inch hot-swap 24 Gb SAS SSDs								
4XB7A80345	BNWA	ThinkSystem 3.5" PM1655 1.6TB Mixed Use SAS 24Gb HS SSD	No	12	No	12	No	No
4XB7A80326	BNWH	ThinkSystem 3.5" PM1653 3.84TB Read Intensive SAS 24Gb HS SSD	No	12	No	12	No	No
4XB7A80327	BP3F	ThinkSystem 3.5" PM1653 7.68TB Read Intensive SAS 24Gb HS SSD	No	12	No	12	No	No
3.5-inch hot-swap 6 Gb SATA SSDs								
4XB7A17121	BA7N	ThinkSystem 3.5" S4520 1.92TB Read Intensive SATA 6Gb HS SSD	No	12	No	12	No	No
4XB7A17122	BK7F	ThinkSystem 3.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD	No	12	No	12	No	No
4XB7A17138	BA4X	ThinkSystem 3.5" S4620 960GB Mixed Use SATA 6Gb HS SSD	No	12	No	12	No	No
4XB7A17139	BA4Y	ThinkSystem 3.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD	No	12	No	12	No	No
4XB7A17140	BK7P	ThinkSystem 3.5" S4620 3.84TB Mixed Use SATA 6Gb HS SSD	No	12	No	12	No	No
M.2- 6 Gb SATA SSDs								
4XB7A82286	BQ1Z	ThinkSystem M.2 5400 PRO 240GB Read Intensive SATA 6Gb NHS SSD	2	2	2	2	2	2
4XB7A82287	BQ1Y	ThinkSystem M.2 5400 PRO 480GB Read Intensive SATA 6Gb NHS SSD	2	2	2	2	2	2
M.2- NVMe PCIe 4.0 x4 NHS SSD								
4XB7A13999	BKSR	ThinkSystem M.2 7450 PRO 960GB Read Intensive NVMe PCIe 4.0 x4 NHS SSD	2	2	2	2	2	2
4XB7A90102	BXMH	ThinkSystem M.2 PM9A3 960GB Read Intensive NVMe PCIe 4.0 x4 NHS SSD	2	2	2	2	2	2

Network adapters

The HX650 V3 support the following networking options.

For details about these options, including configuration rules, see the SR650 V3 product guide:

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#i-o-expansion>

<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#network-adapters>

Mixing vendors is not supported : HX configurations only support network adapters from one vendor. For example, if you select a Broadcom OCP adapter, you cannot select a Mellanox PCIe network adapter.

Table 12. OCP network adapters

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
10GBASE-T Ethernet								
4XC7A08240	B5T4	ThinkSystem Broadcom 57454 10GBASE-T 4-port OCP Ethernet Adapter	1	1	1	1	1	1
4XC7A08236	B5ST	ThinkSystem Broadcom 57416 10GBASE-T 2-port OCP Ethernet Adapter	1	1	1	1	1	1
25 Gb Ethernet								
4XC7A08237	BN2T	ThinkSystem Broadcom 57414 10/25GbE SFP28 2-Port OCP Ethernet Adapter	1	1	1	1	1	1
4XC7A62582	BE4T	ThinkSystem Mellanox ConnectX-6 Lx 10/25GbE SFP28 2-Port OCP Ethernet Adapter	1	1	1	1	1	1

Table 13. PCIe network adapters

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
10GBASE-T Ethernet								
4XC7A08245	B5SU	ThinkSystem Broadcom 57454 10GBASE-T 4-port PCIe Ethernet Adapter	5	5	5	5	5	5
7ZT7A00496	AUKP	ThinkSystem Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter	7	7	7	7	7	7
25 Gb Ethernet								
4XC7A08238	BK1H	ThinkSystem Broadcom 57414 10/25GbE SFP28 2-port PCIe Ethernet Adapter	7	7	7	7	7	7
4XC7A62580	BE4U	ThinkSystem Mellanox ConnectX-6 Lx 10/25GbE SFP28 2-Port PCIe Ethernet Adapter	7	7	7	7	7	7
100 Gb Ethernet								
4XC7A08248	B8PP	ThinkSystem Mellanox ConnectX-6 Dx 100GbE QSFP56 2-port PCIe Ethernet Adapter	5	5	5	5	5	5

Note: ThinkSystem Mellanox ConnectX-6 is the only adapter enabled for RDMA, minimum required quantity is two.

GPU adapters

The HX650 V3 support the following GPU options.

For details about these options, including configuration rules, see the SR650 V3 product guide:
<https://lenovopress.com/lp1601-thinksystem-sr650-v3-server#gpu-adapters>

Configuration Note:

- Some GPUs are only available with VMware ESXi selected as the hypervisor
- Some GPUs are unavailable because of government restriction in certain markets.
- A2 support in AHV is planned for AOS 6.9

Note: The HX650 V3 Storage Integrated System and Certified Node do not support GPUs.

Table 14. GPU adapters

Part number	Feature	Description	Maximum supported					
			HX650 V3 IS	HX650 V3 Storage IS	HX650 V3 CN	HX650 V3 Storage CN	HX650 V3 SAP HANA IS	HX650 V3 SAP HANA CN
Double-wide GPUs								
4X67A76715	BQZR	ThinkSystem NVIDIA A30 24GB PCIe Gen4 Passive GPU w/o CEC	3	No	3	No	No	No
4X67A84823	BT87	ThinkSystem NVIDIA L40 48GB PCIe Gen4 Passive GPU	3	No	3	No	No	No
4X67A72593	BQZQ	ThinkSystem NVIDIA A40 48GB PCIe Gen4 Passive GPU w/o CEC	3	No	3	No	No	No
4X67A76727	BNFE	ThinkSystem NVIDIA A16 64GB Gen4 PCIe Passive GPU	3	No	3	No	No	No
4X67A76727	BQZU	ThinkSystem NVIDIA A16 64GB Gen4 PCIe Passive GPU w/o CEC	3	No	3	No	No	No
4X67A82257	BR9U	ThinkSystem NVIDIA H100 80GB PCIe Gen5 Passive GPU	3	No	3	No	No	No
4X67A76715	BQZP	ThinkSystem NVIDIA A100 80GB PCIe Gen4 Passive GPU w/o CEC	3	No	3	No	No	No
Single-wide GPUs								
4X67A81547	BQZT	ThinkSystem NVIDIA A2 16GB PCIe Gen4 Passive GPU w/o CEC	8	No	8	No	No	No
4X67A84824	BS2C	ThinkSystem NVIDIA L4 24GB PCIe Gen4 Passive GPU	8	No	8	No	No	No

Software

The systems support the hypervisors listed in the following table. Hypervisors are installed on the 2x M.2 SSDs configured in a RAID-1 drive group.

Table 15. Hypervisors

Feature code	Description	Quantity
B15S	Nutanix SW Stack on Nutanix AHV	1
BFT6	Nutanix SW Stack on VMware ESXi 7.0	1

Configuration notes:

- In ESXi-based environments, HX Series Integrated Systems require VMware vCenter Server.
- The HX Certified Nodes support firmware updates from Nutanix with the ThinkAgile HX Lifecycle Manager (UEFI, XCC2, drives, network adapters, and SAS HBAs)

Nutanix licenses on certified nodes : The certified node ships with the Nutanix software preloaded, however Nutanix software licenses and software support are not included. Customers can use the existing Nutanix term-based software licenses and active support contracts, or they can purchase term-based software licenses and support contracts from Nutanix.

For the information on appliance firmware levels, hypervisor versions, and software versions that have been tested for interoperability, refer to the Lenovo ThinkAgile HX Series Best Recipes:

<http://datacentersupport.lenovo.com/us/en/solutions/ht505413>

Nutanix Portfolio 2.0 (PnP) Licensing Model

Nutanix is introducing an enterprise-ready unified cloud platform with our HCI solution as the foundation. The new, simplified product portfolio includes: Nutanix Cloud Platform (NCP), Nutanix Cloud Infrastructure (NCI) and Nutanix Cloud Manager (NCM), NCI-Data with 3 license tiers for each software edition. There are additional packages, Nutanix Unified Storage, Nutanix Database Service (NDB), and Nutanix Desktop Services (NDS), Virtual Desktop Infrastructure (VDI) & Nutanix Frame that are available.

The Nutanix software is available for all base CTO models.

The editions have the following characteristics:

Table 16. Software Editions

License Tier	Nutanix Cloud Platform (NCP)	Nutanix Cloud Infrastructure (NCI)	Nutanix Cloud Manager (NCM)	NCI-Data
Ultimate	<ul style="list-style-type: none"> • NCI Ultimate • NCM Ultimate 	<ul style="list-style-type: none"> • Advanced DR: Sync, Near-Sync, • Runbook Security: Micro-segmentation, Encryption • Cloud Native: Kubernetes Services 	<ul style="list-style-type: none"> • Application Automation • Security General 	<ul style="list-style-type: none"> • No Mseg • No Karbon
Pro	<ul style="list-style-type: none"> • NCI Ultimate • NCM Pro 	<ul style="list-style-type: none"> • Multisite Async DR • Overlay Networking 	<ul style="list-style-type: none"> • Self Service Cost Governance 	<ul style="list-style-type: none"> • No Flow Networking
Starter	<ul style="list-style-type: none"> • NCI Pro • NCM Pro 	<ul style="list-style-type: none"> • AOS Storage + Compression + Dedup 	<ul style="list-style-type: none"> • AI Operations 	<ul style="list-style-type: none"> • No AHV Support

Nutanix Cloud Platform (NCP)

Nutanix Cloud Platform is the complete software edition package that includes both Nutanix Cloud Infrastructure (NCI) and Nutanix Cloud Manager (NCM). It is available in several editions to meet your infrastructure needs with the right set of capabilities.

Nutanix Cloud Infrastructure (NCI)

Nutanix Cloud Infrastructure (NCI) is a complete software stack to unify your hybrid cloud infrastructure including compute, storage and network, hypervisors and containers, in public or enterprise clouds; all with built-in resilience, self-healing, disaster recovery capabilities, and security. It includes enterprise data services and consolidated storage, data protection and disaster recovery, native virtualization and container management, networking and security.

For details on software editions see <https://www.nutanix.com/products/cloud-platform/software-options#nci>

Nutanix Cloud Manager (NCM)

Nutanix Cloud Manager (NCM) offers our customers simplicity and ease of use to build and grow their cloud deployments faster and realize rapid ROI, by providing intelligent operations, self service and orchestration, visibility and governance of spend, security and teams, all through a unified Multi-cloud management solution.

For details on software editions see <https://www.nutanix.com/products/cloud-platform/software-options#ncm>

Nutanix Unified Storage

Nutanix Unified Storage provides software-defined, scale-out storage solutions for enterprise NAS and object workloads for unstructured data, block storage for structured data, and backup storage. Nutanix Unified Storage replaces traditional independent storage services and brings NAS, object, and block workloads into a consolidated unified storage platform with all its benefits, including a unified control plane.

Nutanix Data Lens delivers cloud-based data governance for unstructured data stored in the Nutanix Unified Storage platform, including data lifecycle management, data security, ransomware protection, and audit compliance.

Nutanix Unified Storage and Data Lens are purchased and licensed on a per TiB usable basis.

For details on software editions see <https://www.nutanix.com/products/cloud-platform/software-options#nus>

Nutanix Database Service

Nutanix Database Service (NDB) is a Hybrid Multicloud DBaaS that enables small, nimble teams of DBAs to easily manage large fleets of databases using a single console and API, while enabling developers to self-serve their database requests. NDB is purchased and licensed on a per core basis and is available either as a standalone or as an add-on to NCI. In the standalone version, NDB includes NCI Ultimate functionality in addition to database-specific capabilities and is licensed on a per-core basis.

For details on software editions see <https://www.nutanix.com/products/cloud-platform/software-options#database>

Nutanix Virtual Desktop Infrastructure (VDI) & Nutanix Frame

The Nutanix VDI per user model offers hybrid cloud infrastructure capabilities appropriate for on-prem virtual desktop infrastructure (VDI) and Desktop as a Service (DaaS) use cases with pricing based on a Maximum Concurrent User basis (maximum number of provisioned end-user VMs). VDI per user is an alternative to the core-based NCI licensing option and is designed to provide simple, transparent licensing for all VDI users, regardless of the underlying hardware, hypervisor, or cloud.

- Agnostic: Works with any EUC management platform including Citrix Virtual Apps & Desktops and VMware Horizon
- Term license: 1-year through 5-year options
 - Term license must run on a dedicated software licensed VDI cluster with no core-based licensing. Mixing of non-VDI workloads is not supported.
- Unified Storage: Built-in and also available as a per TiB base add-on
- No additional license cost for DR site

- Portable across on-premises and public cloud, public cloud use requires Ultimate edition
- Available in Starter, Pro, and Ultimate editions
- Cloud Native and Database Service Add-ons not available with NCI VDI. Advanced Replication and Security Add-on features require NCI Ultimate edition

For details on software editions see <https://www.nutanix.com/products/cloud-platform/software-options#vdi>

License Options

ThinkAgile HX can be configured with one of the latest Nutanix software editions that are listed in the following table.

Table 17. Nutanix license options

Feature code	Description	Quantity Required
BVKU	Nutanix Cloud Platform Starter Edition	1 per node
BVKW	Nutanix Cloud Platform Pro Edition	1 per node
BVKY	Nutanix Cloud Platform Ultimate Edition	1 per node
BSPJ	Nutanix Cloud Infrastructure Starter Edition	1 per node
BSPG	Nutanix Cloud Infrastructure Pro Edition	1 per node
BSPL	Nutanix Cloud Infrastructure Ultimate Edition	1 per node
BSQ0	Nutanix Cloud Manager Starter Edition	1 per node
BSPY	Nutanix Cloud Manager Pro Edition	1 per node
BSQ2	Nutanix Cloud Manager Ultimate Edition	1 per node
BSPQ	NCI-Data Starter Edition	1 per node
BSPN	NCI-Data Pro Edition	1 per node
BSPS	NCI-Data Ultimate Edition	1 per node
BSQH	Nutanix Database Service (NDB) Platform	1 per node
BSQ7	End User Computing (EUC) Starter	1 for every 200 concurrent users
BSQ5	End User Computing (EUC) Pro	1 for every 200 concurrent users
BSQ9	End User Computing (EUC) Ultimate	1 for every 200 concurrent users
BSQD	Nutanix Unified Storage (NUS) Starter	1 per Tib
BSQB	Nutanix Unified Storage (NUS) Pro	1 per Tib

Warranty and Support

The ThinkAgile HX Series Integrated Systems can be configured with a three-, four, or five-year hardware warranty with 24x7 ThinkAgile Premier Single Point of Support (Lenovo appliance hardware and Nutanix software) and various levels of coverage with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

The Lenovo local support centers perform problem determination and resolution for hardware-related issues and escalate to Nutanix, on behalf of the customer, for software-related problem determination. Nutanix will contact the customer and will own the software-related problem resolution until closure.

For more information refer to the Lenovo Support Plan - ThinkAgile HX Integrated Systems and Lenovo Converged HX Series

<https://datacentersupport.lenovo.com/us/en/solutions/ht505404>

The ThinkAgile HX Certified Nodes can be configured with three-, four, or five-year hardware warranty and various levels of service coverage with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

The base warranty provides 9x5 Next Business Day response with parts delivered. Lenovo's additional support services provide a sophisticated, unified support structure for a customer's data center, with an experience consistently ranked number one in customer satisfaction worldwide.

For more information refer to the Lenovo Support Plan - ThinkAgile HX Certified Nodes

<https://support.lenovo.com/us/en/solutions/HT510301>

Hardware warranty

The ThinkAgile HX650 V3 2U Integrated Systems & Certified Nodes have a 3-year warranty:

- 7D6N - 2U Integrated System - 3 year warranty
- 7D6N - 2U Certified Node - 3 year warranty

The standard warranty terms are customer-replaceable unit (CRU) and onsite (for field-replaceable units FRUs only) with standard call center support during normal business hours and 9x5 Next Business Day Parts Delivered.

Lenovo's additional support services provide a sophisticated, unified support structure for your data center, with an experience consistently ranked number one in customer satisfaction worldwide. Available offerings include:

- **Premier Support**

Premier Support provides a Lenovo-owned customer experience and delivers direct access to technicians skilled in hardware, software, and advanced troubleshooting, in addition to the following:

- Direct technician-to-technician access through a dedicated phone line
- 24x7x365 remote support
- Single point of contact service
- End to end case management
- Third-party collaborative software support
- Online case tools and live chat support
- On-demand remote system analysis

- **Warranty Upgrade (Preconfigured Support)**

Services are available to meet the on-site response time targets that match the criticality of your systems.

- 3, 4, or 5 years of service coverage
- 1-year or 2-year post-warranty extensions
- **Foundation Service:** 9x5 service coverage with next business day onsite response. YourDrive YourData is an optional extra (see below).
- **Essential Service:** 24x7 service coverage with 4-hour onsite response or 24-hour committed repair (available only in select markets). Bundled with YourDrive YourData.
- **Advanced Service:** 24x7 service coverage with 2-hour onsite response or 6-hour committed repair (available only in select markets). Bundled with YourDrive YourData.

- **Managed Services**

Lenovo Managed Services provides continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of your data center using state-of-the-art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware & OS device driver levels, and software as needed. We'll also maintain records of latest patches, critical updates, and firmware levels, to ensure you systems are providing business value through optimized performance.

- **Technical Account Management (TAM)**

A Lenovo Technical Account Manager helps you optimize the operation of your data center based on a deep understanding of your business. You gain direct access to your Lenovo TAM, who serves as your single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time. In addition, your TAM will help proactively make service recommendations and manage your service relationship with Lenovo to make certain your needs are met.

- **Enterprise Server Software Support**

Enterprise Software Support is an additional support service providing customers with software support on Microsoft, Red Hat, SUSE, and VMware applications and systems. Around the clock availability for critical problems plus unlimited calls and incidents helps customers address challenges fast, without incremental costs. Support staff can answer troubleshooting and diagnostic questions, address product comparability and interoperability issues, isolate causes of problems, report defects to software vendors, and more.

- **YourDrive YourData**

Lenovo's YourDrive YourData is a multi-drive retention offering that ensures your data is always under your control, regardless of the number of drives that are installed in your Lenovo server. In the unlikely event of a drive failure, you retain possession of your drive while Lenovo replaces the failed drive part. Your data stays safely on your premises, in your hands. The YourDrive YourData service can be purchased in convenient bundles and is optional with Foundation Service. It is bundled with Essential Service and Advanced Service.

- **Health Check**

Having a trusted partner who can perform regular and detailed health checks is central to maintaining efficiency and ensuring that your systems and business are always running at their best. Health Check supports Lenovo-branded server, storage, and networking devices, as well as select Lenovo-supported products from other vendors that are sold by Lenovo or a Lenovo-Authorized Reseller.

Examples of region-specific warranty terms are second or longer business day parts delivery or parts-only base warranty.

If warranty terms and conditions include onsite labor for repair or replacement of parts, Lenovo will dispatch a service technician to the customer site to perform the replacement. Onsite labor under base warranty is limited to labor for replacement of parts that have been determined to be field-replaceable units (FRUs). Parts that are determined to be customer-replaceable units (CRUs) do not include onsite labor under base warranty.

If warranty terms include parts-only base warranty, Lenovo is responsible for delivering only replacement parts that are under base warranty (including FRUs) that will be sent to a requested location for self-service. Parts-only service does not include a service technician being dispatched onsite. Parts must be changed at customer's own cost and labor and defective parts must be returned following the instructions supplied with the spare parts.

Lenovo Service offerings are region-specific. Not all preconfigured support and upgrade options are available in every region. For information about Lenovo service upgrade offerings that are available in your region, refer to the following resources:

- Service part numbers in Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com/#/services>
- Lenovo Services Availability Locator
<http://lenovolocator.com/>

For service definitions, region-specific details, and service limitations, please refer to the following documents:

- Lenovo Statement of Limited Warranty for Infrastructure Solutions Group (ISG) Servers and System Storage
<http://pcsupport.lenovo.com/us/en/solutions/ht503310>
- Lenovo Data Center Services Agreement
<http://support.lenovo.com/us/en/solutions/ht116628>

Deployment services

The following optional Lenovo Professional Services are available to get customers up and running quickly.

- Basic Hardware Installation Services
 - Unpacking and inspecting the systems
 - Installing options and mounting the systems in a rack cabinet
 - Connecting the systems to electrical power and network
 - Checking and updating firmware to the latest levels
 - Verifying operations
 - Disposal of the packaging materials (within the customer site)
- Nutanix deployment services - Base (per node)
 - Conducting remote preparation and planning
 - Verifying firmware versions and performing firmware updates, if needed
 - Installing and configuring hypervisor and Nutanix controller VM
 - Creating Nutanix cluster
 - Configuring storage
 - Configuring administrative features
- Nutanix deployment services - Advanced (per cluster)
 - Configuring and integrating a virtualized environment
 - Nutanix containers and Acropolis (AHV) cluster
 - VMware vCenter Server and vSphere cluster (for VMware installations)
 - Transferring knowledge

- Nutanix deployment services - Advanced with XClarity (per cluster)
 - Nutanix deployment services - Advanced
 - Installing Lenovo XClarity
 - Configuring Lenovo XClarity network settings and performing discovery and inventory
 - Installing system updates

The following table lists ThinkAgile Health Check & Deployment offerings are available for ThinkAgile HX customers. These offerings are performed by Lenovo Professional Services.

- **Onsite Deployment:** Install, configure, and validate solution on-site, and conduct knowledge transfer.
- **Remote Deployment:** Install, configure, and validate solution remotely, and conduct knowledge transfer.
- **Remote Health Check:** Report & remediation of hardware and cluster health issues, including firmware and software updates.

Note: For custom Hardware Installation and Deployment Services, please contact the Lenovo Professional Services team for sizing and pricing.

Table 18. Deployment offerings

Part number	Description
Onsite deployment services	
5MS7B00043	ThinkAgile HX Onsite Deployment (up to 3 nodes)
5MS7B00044	ThinkAgile HX Onsite Deployment (additional node)
Remote deployment services	
5MS7B00045	ThinkAgile HX Remote Deployment (up to 3 nodes)
5MS7B00046	ThinkAgile HX Remote Deployment (additional node)
5MS7A27430	ThinkAgile HX SAP HANA Deployment - Custom
Remote Health Check	
5MS7B00065	ThinkAgile HX 1X Remote Health Check (up to 3 node cluster)
5MS7B00066	ThinkAgile HX 1X Remote Health Check (additional node)
5MS7B00067	ThinkAgile HX 1X Remote Health Check & Update (up to 3 node cluster)
5MS7B00068	ThinkAgile HX 1X Remote Health Check & Update (additional node)

For more information, refer to the Data Center Implementation Services web page:

<https://www.lenovo.com/us/en/data-center/services/implementation-services/>

Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region-specific offers, please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<https://www.lenovo.com/us/en/landingpage/lenovo-financial-services/>

Seller training courses

The following sales training courses are offered for employees and partners (login required). Courses are listed in date order.

- 1. Lenovo Data Center Product Portfolio**
2024-04-22 | 20 minutes | Employees and Partners

This course introduces the Lenovo data center portfolio, and covers servers, storage, storage networking, and software-defined infrastructure products. After completing this course about Lenovo data center products, you will be able to identify product types within each data center family, describe Lenovo innovations that this product family or category uses, and recognize when a specific product should be selected.

Published: 2024-04-22

Length: 20 minutes

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: SXXW1110r7

2. **VTT Cloud and Edge Architecture: Principal Consultant Overview**

2024-04-10 | 50 minutes | Employees Only

Join Ruth Miller, Lenovo Principal Consultant, SSG Services for a data-led discussions to examine in detail customer IT environments, highlighting pain points, performance issues, edge and hybrid cloud strategy and carbon reduction capability.

Examples of workshop deliverables and outcomes will be discussed to illustrate the value of early engagement and discovery.

Published: 2024-04-10

Length: 50 minutes

Employee link: Grow@Lenovo

Course code: DVCLD211

3. **VTT Data Management How to sell storage - April 2024**

2024-04-10 | 60 minutes | Employees Only

In this course, you will know:

- Why do we sell storage?
- What are the basics you need to get an opportunity rolling?
- Why Lenovo for Storage?
- What is happening in the market today?
- How to determine traction?

Published: 2024-04-10

Length: 60 minutes

Employee link: Grow@Lenovo

Course code: DVDAT209

4. **Data management Overview**

2024-03-14 | 25 minutes | Employees and Partners

After completing this course you will be able to:

1. Know more about the data management trends and challenges
2. Understand the data management portfolio
3. Find out how data drives business value

Published: 2024-03-14

Length: 25 minutes

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: DSTOO201

5. **Technical Overview: ThinkAgile HCI and Cloud Platforms**

2024-03-07 | 35 minutes | Employees and Partners

This course is designed to give Lenovo sales and partner representatives a technical overview of Lenovo's ThinkAgile hyperconverged infrastructure and cloud platforms. Turnkey cloud platforms along with their architectural makeup, and container and data protection solutions are also covered.

Learning Objectives:

- Describe Lenovo's ThinkAgile hyperconverged infrastructure and cloud platforms
- Explain do-it-yourself and turnkey cloud platforms along with their architectural makeup
- Describe container and data protection solutions

Published: 2024-03-07

Length: 35 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DCLDT2001r3

6. **Lenovo HX Business Conversations**

2024-03-06 | 20 minutes | Employees and Partners

This course covers business conversations for Lenovo HX Hyperconverged solutions.

Course objectives:

- Identify a potential Lenovo HX opportunity
- Conduct effective discovery to reveal the customer's data center needs
- Probe the customer
- Ensure the customer knows you understand their issue(s)

Published: 2024-03-06

Length: 20 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DCGHXB001

7. **Whats new with ThinkAgile HX AI-Ready solutions and enabling edge to cloud**

2024-02-15 | 70 minutes | Employees Only

Join Scott Ellis, Nutanix Solution Architect, Ritu Jain, Lenovo Product Manager and Adam Mandelbloom, Lenovo Technical Product Manager for a discussion on why many customers are looking for VMware alternatives these days, ThinkAgile HX is a compelling choice, learn how easy it is to migrate from VMWare to Nutanix and some of the benefits it can provide. Another hot topic these days is Artificial intelligence, and many times this takes place at the edge. Learn how Lenovo and Nutanix solve these challenges with compelling edge to cloud solutions.

Published: 2024-02-15

Length: 70 minutes

Employee link: [Grow@Lenovo](#)

Course code: DVCLD209

8. **Family Introduction: Converged and Hyperconverged**

2024-01-25 | 15 minutes | Employees and Partners

This course is designed to give Lenovo sales a foundation on the characteristics of the Converged and Hyperconverged family. As an introduction to each family, this course also includes positioning, when to use a family and product, and keywords a client may use when discussing a converged or hyperconverged product.

Objectives:

- Family characteristics
- Priority positioning
- Product usage
- Key words and phrases

Published: 2024-01-25

Length: 15 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: SXSX1101r2

9. **The 10-minute Edge conversation for Lenovo Sellers**

2023-12-14 | 20 minutes | Employees and Partners

The purpose of this course is to enable sellers to have a 10 to 15-minute customer conversation addressing the relevancy of Edge solutions to the customer business.

Learning Objectives:

- Prepare for the initial customer conversation
- Hold a 10-minute Edge Operational Technology (OT) conversation
- Take the appropriate steps to progress the sale

Published: 2023-12-14

Length: 20 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DTEF103

10. **FY24Q3 Hybrid Cloud Update**

2023-12-11 | 15 minutes | Employees and Partners

This update is designed to help you discuss the features and customer benefits of Lenovo ThinkAgile systems that use the 5th Gen Intel® Xeon® processors. Lenovo has also introduced a new service, Lenovo TruScale Hybrid Cloud for Edge, which provides agile and reliable infrastructure as a service where you need it, when you need it. New Professional Services for AI with NVIDIA provides customers with expert guidance for designing and implementing tailored AI solutions. Reasons to call your customer and talk about refreshing their infrastructure are also included as a guideline.

Published: 2023-12-11

Length: 15 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: SXXW2523a

11. **VEEAM Solutions Sales Training**

2023-09-27 | 20 minutes | Employees and Partners

In this course you will learn about Hyper-availability for the Always-On Enterprise.

By the end of this training, you should be able to:

Identify and explain the core products and solutions offered by Veeam.

Explain the key benefits and value propositions of integrating Veeam solutions with Lenovo products.

Published: 2023-09-27

Length: 20 minutes

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: DSTOO100

12. **A Seller's Guide to Nutanix OEM 2.0**

2023-08-24 | 90 minutes | Employees Only

In this Sales Team webinar, Mike Tilt, Ritu Jain and Brandon Saxton will cover the new Nutanix 2.0 pricing and packaging options to guide sellers on what the different types of offers, sales process and how to sell Nutanix 2.0. You will get an overview of OEM 2.0, Sales Process, PNP Pricing and Zone Information, and additional resources on Upgrade & Renewal SKUs and process.

Course Objectives

- Defining Nutanix 2.0 Pricing and Packaging
- Describing OEM 2.0 Sales Process
- Identifying resources and support

Published: 2023-08-24

Length: 90 minutes

Employee link: Grow@Lenovo

Course code: DSXNS101

13. **Empowering Technical Sellers: Excelling In Transactional Workloads**

2023-08-18 | 60 minutes | Employees and Partners

This training abstract outlines a comprehensive program designed to equip technical sellers with the knowledge and expertise required to effectively promote and sell Lenovo and Nutanix solutions for transactional workloads. By focusing on the unique capabilities and advantages of Lenovo and Nutanix infrastructure in handling high-performance transactional applications, this training program empowers technical sellers to engage with customers, understand their specific workload requirements, and articulate the value proposition of Lenovo and Nutanix offerings in this domain. The training program encompasses the following key areas:

1. Transactional Workloads Overview:
2. Lenovo and Nutanix Solutions for Transactional Workloads:
3. Product Portfolio Deep Dive:
4. Addressing Customer Requirements:
5. Solution Positioning and Sales Techniques:
6. Competitor Analysis:

Through this training, technical sellers will acquire the expertise necessary to engage with customers, understand their transactional workload requirements, and effectively position Lenovo and Nutanix solutions as the ideal choice for high-performance, mission-critical applications. By understanding the intricacies of Lenovo and Nutanix offerings in the transactional workload space, technical sellers will be empowered to drive successful sales engagements, build strong customer relationships, and contribute to the growth and success of their organization.

Published: 2023-08-18

Length: 60 minutes

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: DHXD201

14. Empowering Technical Sellers: Accelerating Lenovo and Nutanix Cloud Native-Container Application Solutions

2023-08-18 | 60 minutes | Employees and Partners

This training abstract outlines a comprehensive program specifically designed to equip technical sellers with the knowledge and expertise needed to effectively promote and sell Lenovo and Nutanix cloud native/container application solutions. By focusing on the integration of Lenovo and Nutanix technologies with modern application development practices, this training enables tech sellers to engage with customers, understand their requirements, and articulate the unique value proposition of Lenovo and Nutanix offerings in the cloud native and containerization landscape.

The training encompasses the following key areas:

1. Cloud Native and Containerization Fundamentals:
2. Lenovo and Nutanix Solutions Overview:
3. Product Portfolio Deep Dive:
4. Addressing Customer Needs:
5. Solution Positioning and Sales Techniques:
6. Competitor Analysis:
7. Technical Demonstration and Proof-of-Concept:

Throughout the training, tech sellers will gain the expertise necessary to engage with customers, understand their unique requirements, and effectively position Lenovo and Nutanix solutions as the go-to choice for cloud native and containerized application needs. By learning the intricacies of Lenovo and Nutanix offerings, technical sellers will be equipped to drive successful sales engagements, strengthen customer relationships, and contribute to the overall growth and success of the organization.

Published: 2023-08-18

Length: 60 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DHXC201

15. ThinkAgile Accelerating Cloud Agility: HX Series Technical Presentation

2023-07-28 | 40 minutes | Employees and Partners

Amalu Santhosh, Lenovo Technical Product Manager, reviews the ThinkAgile HX product portfolio. She will walk you through a technical deep dive into HX workloads and discuss technical details and performance of the latest ThinkAgile HX solutions.

Published: 2023-07-28

Length: 40 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DHXT201

16. Lenovo Data Center Product Portfolio

2023-07-21 | 15 minutes | Employees and Partners

This course introduces the Lenovo data center portfolio, and covers servers, storage, storage networking, and software-defined infrastructure products. After completing this course about Lenovo data center products, you will be able to identify product types within each data center family, describe Lenovo innovations that this product family or category uses, and recognize when a specific product should be selected.

Published: 2023-07-21

Length: 15 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: SXXW1110r6

17. Cloud and HCI or Somewhere in Between
2023-07-11 | 40 minutes | Employees and Partners

Provides a brief overview of Lenovo Portfolio for HCI and Cloud including ThinkAgile HX, VX, MX Certified Nodes and Appliances, Azure, and Engineered Cloud Solutions. Review Scenarios and complete questions "choose your own adventure" to identify and qualify an opportunity as HCI or Cloud and which portfolio solution would be the best option.

Course objectives:

- Where in the Sales Cycle we are
- What is Cloud
- What is Hyperconverged Infrastructure (HCI)
- Review Lenovo Offerings in Cloud and HCI
- Scenarios

Published: 2023-07-11

Length: 40 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DCLDS104r2

18. What's New with Nutanix 2.0? Portfolio and Licensing
2023-06-08 | 15 minutes | Employees and Partners

Nutanix has updated and simplified their licensing for our joint customers. This course is created to give sales and partners representatives an overview for the recent Nutanix licensing changes and their current options.

Course Objectives:

After completing this course, you should be able to:

- Describe the new Nutanix licensing rollout
- List the new pricing and packaging options

Published: 2023-06-08

Length: 15 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DHXL001

19. Partner Technical Webinar - HX vs VX vs MX Panelist Discussion
2023-04-11 | 60 minutes | Employees and Partners

In this 60-minute replay, Joe Murphy moderated a panelist discussion on ThinkAgile SHI. Baker Hull, VMware represented VX; Mike Tilt, Lenovo Technical Sales Manager presented HX; Phil Searles, Lenovo Solution Architect represented MX; and Brandon Saxton Lenovo NA Product Manager for ThinkAgile made up the panelist. The focus was less on the differences but how to elevate the conversation to get to the best solution. No slides were presented.

Published: 2023-04-11

Length: 60 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: 033123

20. Partner Technical Webinar - ThinkAgile V3 Overview and SMB Express

2023-02-13 | 60 minutes | Employees and Partners

In this 60-minute replay, Joe Murphy and Dave Brown, Lenovo Solution Architects reviewed the new ThinkAgile V3 solutions. In addition, Dave did a lengthy demo and explanation of the new SMB Express feature of DCSC.

Published: 2023-02-13

Length: 60 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: 021023

21. Family Portfolio: ThinkAgile HX

2022-12-13 | 20 minutes | Employees and Partners

This course is designed to give Lenovo sales an introduction to Lenovo ThinkAgile HX appliances. This course also includes why a customer should choose Lenovo for their hyperconverged products.

Course objectives:

- Learn to identify products and features within the ThinkAgile HX family
- Describe Lenovo innovations that the ThinkAgile HX family uses
- Recognize when a specific product or products should be selected

Published: 2022-12-13

Length: 20 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: SXS2109r3

22. ThinkAgile HX Seller Presentation

2022-11-01 | 25 minutes | Employees Only

Join Ritu Jain, Worldwide Product Manager for ThinkAgile, as she shares how ThinkAgile HX unique values, routes to market, how to position HX, and competitive landscape.

By the end of this training, you should be able to:

- Describe the ThinkAgile HX advantages
- Discover the routes to market & models available to sell
- Explain the HX solution positioning

Published: 2022-11-01

Length: 25 minutes

Employee link: [Grow@Lenovo](#)

Course code: DHXSP101

23. ThinkAgile HX Customer Presentation
2022-10-31 | 25 minutes | Employees Only

Join Ritu Jain, Worldwide ThinkAgile Product Manager for ThinkAgile, as she shares trends shaping cloud deployment models, customer Hybrid cloud strategy and how ThinkAgile HX is helping customers in their journey.

By the end of this training, you should be able to:

- Describe the ThinkAgile HX Solution
- Discover the trends in the cloud industry
- Explain how HX is helping customers with evolving trends

Published: 2022-10-31

Length: 25 minutes

Employee link: [Grow@Lenovo](#)

Course code: DHXCP101

24. Data Infrastructure Management - DM Series Storage
2022-10-28 | 25 minutes | Employees Only

This course provides a technical overview of the ThinkSystem DM series products. Course DDMO101 – Lenovo ThinkSystem DM & DE Series Overview is recommended prior to this course.

By the end of this course, you should be able to:

- Recognize the components of the Lenovo Data Management portfolio
- Discuss the features of the Lenovo Data Management components
- Describe the features of the SnapCenter software components

Published: 2022-10-28

Length: 25 minutes

Employee link: [Grow@Lenovo](#)

Course code: DDM200

25. Lenovo ThinkAgile HX VDI Solution
2022-08-26 | 10 minutes | Employees Only

In this lightboard video, Eric Kern whiteboards Lenovo's ThinkAgile HX VDI Solution. Sellers will learn how it works and customer benefits. Updated August 26th, 2022.

Objectives for this course:

- Understand how the VDI solution leverages the ThinkAgile HX platform with Citrix.
- Describe what actions a system administrator can perform in the Citrix portal.
- Explain how to manage the system remotely from a cloud infrastructure with Citrix.

Published: 2022-08-26

Length: 10 minutes

Employee link: [Grow@Lenovo](#)

Course code: DSV129

26. **Lenovo's value-added Solutions Software and SDI -ThinkAgile HX - Best practices for Selling Software/ SDI Process**

2022-08-23 | 60 minutes | Employees Only

ThinkAgile HX is one of the most important parts of the ThinkAgile Lenovo Portfolio of SDI, Software Defined Infrastructure but it can be challenging to manage the deal registration and quoting for ThinkAgile HX. Listen in on Part 1 of this recent North America webinar where Mike Tilt, Sales Engineer Director, discusses the overview of ThinkAgile HX sales process and how to obtain Deal protection. He also discusses best practices for interactions with Nutanix sellers and shares personal experiences as a former SDI focused seller.

Published: 2022-08-23

Length: 60 minutes

Employee link: Grow@Lenovo

Course code: DCLDO121

27. **Lenovo's value-added Solutions Software and SDI -ThinkAgile HX - Best practices for Selling Software/ SDI Process**

2022-08-23 | 60 minutes | Employees Only

In this Part 2, a continuation of a recent North American Webinar, Mike Tilt, Sales Engineer Director, continues discussion of ThinkAgile HX sales process and dives into VLS. He also discusses best practices for interactions with Nutanix sellers and shares personal experiences as a former SDI focused seller.

Published: 2022-08-23

Length: 60 minutes

Employee link: Grow@Lenovo

Course code: DCLDO122

28. **Lenovo TruScale for Hosted Desktops with Nutanix**

2022-08-22 | 15 minutes | Employees and Partners

By exemplifying the case of a customer who wants to move to a remote desktop public cloud solution, this 15-minute course offers an overview of the Lenovo TruScale for Hosted Desktops with Nutanix solution, including benefits, architecture, and value proposition.

Published: 2022-08-22

Length: 15 minutes

Employee link: Grow@Lenovo

Partner link: [Lenovo Partner Learning](#)

Course code: DSOLO109

29. **Lenovo's value-added Solutions Software and SDI - ThinkAgile HX Licensing Update from Nutanix**

2022-08-22 | 60 minutes | Employees Only

In this continuous series of recorded webinar for ThinkAgile, Ed Stickney, Nutanix Worldwide OEM Sales Strategy and Enablement Leader, reviews with the North American region the recent changes made to the Nutanix simplified licensing model and how it benefits your customers. He also discusses how the new licensing maps to the current licensing and how you can migrate your customers to the new licensing. Ed also provides you valuable feedback from audience questions.

Published: 2022-08-22

Length: 60 minutes

Employee link: Grow@Lenovo

Course code: DCLDO120

30. **Partner Technical Webinar - sizing ThinkAgile HX & VX**

2022-08-01 | 60 minutes | Partners Only

In this 60-minute replay, we demonstrated how to size ThinkAgile VX and ThinkAgile HX. First Lenovo Solution Architect Joe Murphy reviewed the sizing methodology. Next, Lenovo Solution Architect Richard Smutzer demonstrated how to size ThinkAgile HX using Nutanix's sizing tool. Lenovo Solution Architect David Cianchetta closed the webinar by demonstrating ThinkAgile VX sizing using the VSAN sizer from VMware.

Published: 2022-08-01

Length: 60 minutes

Partner link: [Lenovo Partner Learning](#)

Course code: 072922

31. **Partner Technical Webinar - Nutanix and ThinkAgile HX**

2022-07-20 | 60 minutes | Partners Only

In this 60-minute replay, Brandon Saxton, Lenovo NA Product Manager, and Brendan McDermott, Senior Sales Engineer, reviewed the Nutanix Lenovo Partnership, the technology and the ThinkAgile HX offerings including both Integrated Systems and Certified Nodes. Based on some questions, a few slides were added at the end to compare ThinkAgile HX with the other ThinkAgile offerings.

Published: 2022-07-20

Length: 60 minutes

Partner link: [Lenovo Partner Learning](#)

Course code: 071522

32. **ThinkAgile Advantage Services**

2022-07-20 | 15 minutes | Employees and Partners

The goal of this training is to go through the details of ThinkAgile Advantage, and to provide everything you need to have customer conversations and to order ThinkAgile Advantage and recommended services.

Course objectives:

1. Learn about the customer challenges and benefits of ThinkAgile Advantage
2. Discover what it includes
3. Understand how to make the most of ThinkAgile products and solutions with the elevator pitch for customer conversations.

Published: 2022-07-20

Length: 15 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DSV121r2

33. **Start the Conversation - Lenovo Cloud Strategy**

2021-10-25 | 25 minutes | Employees and Partners

The purpose of this course is to help sellers use the Lenovo cloud strategy as a foundation to start the customer cloud conversation. Topics include:

- Why customers choose the cloud
- The Lenovo Cloud Strategy
- Starting the customer cloud conversation

Published: 2021-10-25

Length: 25 minutes

Employee link: [Grow@Lenovo](#)

Partner link: [Lenovo Partner Learning](#)

Course code: DCLDS103r2

Related publications and links

For more information, see these resources:

- Lenovo ThinkAgile HX Series
<https://www.lenovo.com/us/en/data-center/software-defined-infrastructure/ThinkAgile-HX-Series/p/WMD00000326>
- ThinkAgile HX Series Comparison reference
<https://lenovopress.com/lp1336-thinkagile-hx-series-comparison>
- Interactive 3D Tour of ThinkAgile HX Series offerings:
<https://lenovopress.com/lp0454-lenovo-thinkagile-hx-series-interactive-3d-tour>
- Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com>
- Lenovo ThinkAgile product publications (user manuals):
<https://thinkagile.lenovofiles.com/help/index.jsp>
- Nutanix documentation
<https://my.nutanix.com/>
- Lenovo ThinkAgile HX Series Best Recipes
<http://datacentersupport.lenovo.com/us/en/solutions/ht505413>
- Lenovo Data Center Support
<http://datacentersupport.lenovo.com>

Related product families

Product families related to this document are the following:

- [2-Socket Rack Servers](#)
- [Hyperconverged Infrastructure](#)
- [Hyperconverged Infrastructure](#)
- [ThinkAgile HX Series for Nutanix](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2024. All rights reserved.

This document, LP1668, was created or updated on April 2, 2024.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1668>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1668>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

AnyBay®

Lenovo Services

ThinkAgile®

ThinkSystem®

XClarity®

The following terms are trademarks of other companies:

Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Microsoft® and Hyper-V® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.